


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

1		2		3		4		5		6		7		8	
2 Pin				3 Pin											
PCB Layout															
Recommended Panel Cut-Out															
23XXX635-02															
Pin Number															
2 Pin				3 Pin											
P/N: 23002635-02				P/N: 23003635-02											
Pin Assignments Front View															
UNIT:mm				DESCRIPTION		PART NO		DRAWN BY		DATE					
TOLERANCE				Middle Series Push Lock Front Mount With Female Pin(PCB)		23XXX635-02		Liu		2019/08/13					
.X		±0.25		SCALE		1:1		DWG NO		CHECKED BY					
.XX		±0.15								Mo					
.XXX		±0.05		SHEET		1 OF 1		CUSTOMER		APPROVED BY					
ANGLES		±1°		REV		C1		SIZE		A4					
										* : Inspection Item					
1		2		3		4		5		6		7		8	

</

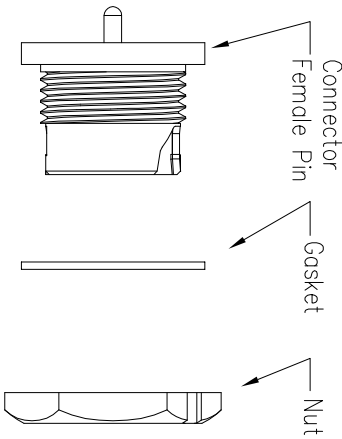

Specification:

- 1.Operation Temperature: -45°C~105°C.
- 2.Insulation Resistance: 100MΩ at DC500V.
- 3.Contact Resistance: <10mΩ
- 4.Withstand Voltage: 2000V AC
- 5.Operating Current: 20A
- 6.Operating Voltage: AC 300V
- 7.Waterproof Rate: IP67 (Mated)
- 8.Housing: Nylon, Black
- 9.Female Pin: Copper Alloy, Gold Plated
- 10.Gasket: Silicon Gray
- 11.Panel Nut: Nylon, Blue
- 12.Torque Rate: 0.8~1.0N•m
- 13.RoHS Compliant.
- 14.Mating Cap P/N: 806-00047-00

CHOGORI®