

1

2

3

4




5

6

7


8

46.7 (Ref)

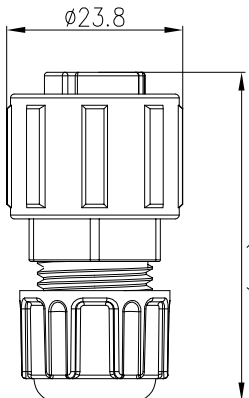

23XXX211-XX Cable Range OD
01 OD: $\phi 3.5\text{mm} \sim \phi 6.5\text{mm}$
02 OD: $\phi 6.5\text{mm} \sim \phi 9.5\text{mm}$

Pin Number



4 Pin

P/N: 23004211-XX

Pin Assignments
Front View

A



UNIT:mm
TOLERANCE
.X
.XX
.XXX
ANGLES
 ± 0.25
 ± 0.15
 ± 0.05
 $\pm 1^\circ$

DESCRIPTION

Middle Series Screw
Male Plug With Female Pin

SCALE: 1:1
REV: C1
SIZE: A4
SHEET: X OF X
* : Inspection Item

CHOGORI®

PART NO

23XXX211-XX

DWG NO

CUSTOMER

DRAWN BY

Liu

CHECKED BY

APPROVED BY

DATE 2019/08/13

DATE 2019/08/13

DATE 2019/08/13

DESCRIPTION

INITIAL DRAWING

SIGN

Liu

DATE

2019/08/13

Specification:

- 1.Operation Temperature: $-45^\circ\text{C} \sim 105^\circ\text{C}$.
- 2.Insulation Resistance: $100\text{M}\Omega$ at DC500V.
- 3.Contact Resistance: $<10\text{m}\Omega$.
- 4.Withstand Voltage: 2000V AC
- 5.Operating Current: 15A
- 6.Operating Voltage: AC 300V
- 7.Waterproof Rate: IP67 (Mated)
- 8.Seal Nut: Nylon, Black
- 9.Seal Ring: Silicon, Black.
- 10.Clamp Ring: Nylon, Black
- 11.Gasket: Silicon, Red
- 12.Lock Nut: Nylon, Black
- 13.Female Pin: Copper Alloy, Gold Plated
- 14.Connector: Nylon+GF, Black
- 15.O-Ring: Silicon, Red
- 16.RoHS Compliant.
- 17.Mating Cap: 806-00026-01