

1

2

3

4





5

6

7

8



46.7 (Ref)

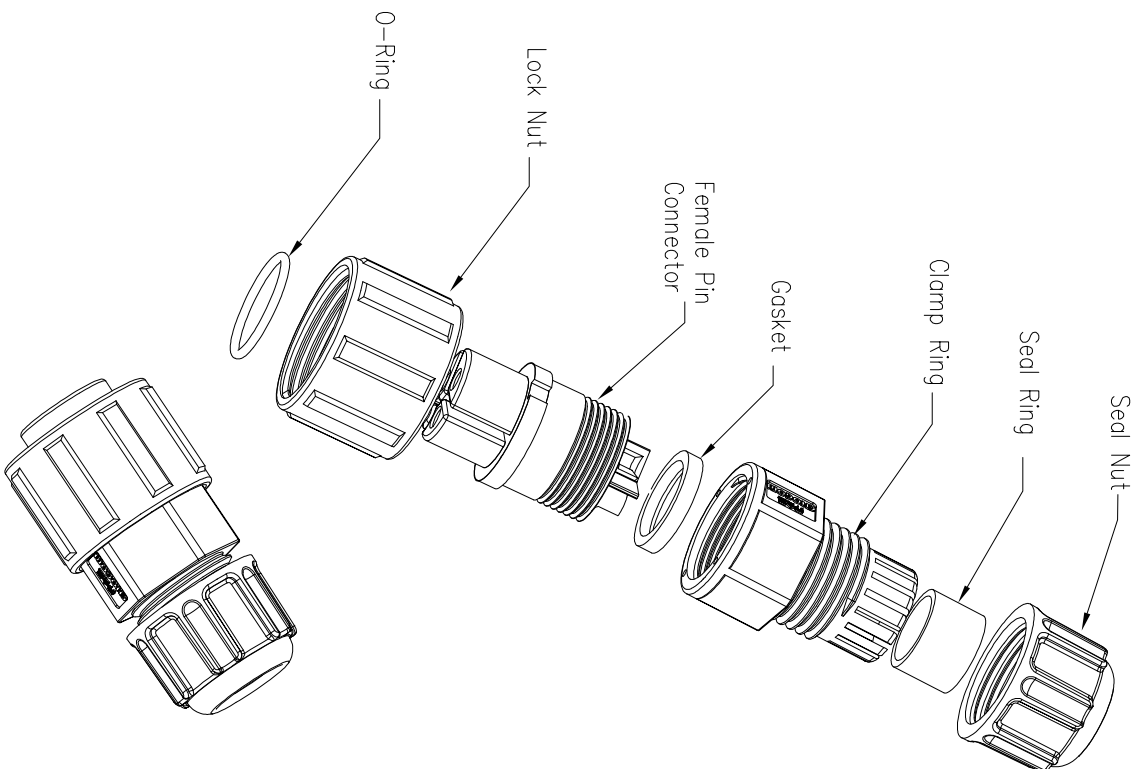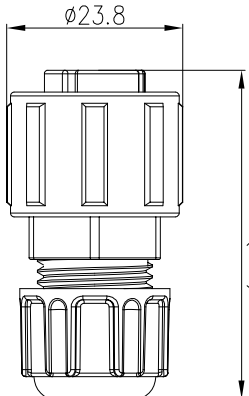

23XXX211-XX Cable Range OD

01 OD: $\phi 3.5\text{mm} \sim \phi 6.5\text{mm}$
02 OD: $\phi 6.5\text{mm} \sim \phi 9.5\text{mm}$

Pin Number



5 Pin

6 Pin

P/N: 23005211-XX

P/N: 23006211-XX

Pin Assignments Front View

A

UNIT:mm



DESCRIPTION

Middle Series Screw

TOLERANCE

.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANGLES $\pm 1^\circ$

SCALE

1:1

SHEET

X OF X

Male Plug With Female Pin

REV

C1

SIZE

A4

* : Inspection Item

CHOGORI®

PART NO

23XXX211-XX

DRAWN BY

Liu

DATE

2019/08/13

DWG NO

CUSTOMER

CHECKED BY

APPROVED BY

Mo

Panson

DATE

2019/08/13

- Specification:
- 1.Operation Temperature: $-45^\circ\text{C} \sim 105^\circ\text{C}$.
 - 2.Insulation Resistance: $100\text{M}\Omega$ at DC500V.
 - 3.Contact Resistance: $<10\text{m}\Omega$.
 - 4.Withstand Voltage: 1500V AC
 - 5.Operating Current: 10A
 - 6.Operating Voltage: AC 125V
 - 7.Waterproof Rate: IP67 (Mated)
 - 8.Seal Nut: Nylon, Black
 - 9.Seal Ring: Silicon, Black.
 - 10.Clamp Ring: Nylon, Black
 - 11.Gasket: Silicon, Red
 - 12.Lock Nut: Nylon, Black
 - 13.Female Pin: Copper Alloy, Gold Plated
 - 14.Connector: Nylon+GF, Black
 - 15.O-Ring: Silicon, Red
 - 16.RoHS Compliant.
 - 17.UL Compliant.
 - 18.Mating Cap: 806-00026-01