
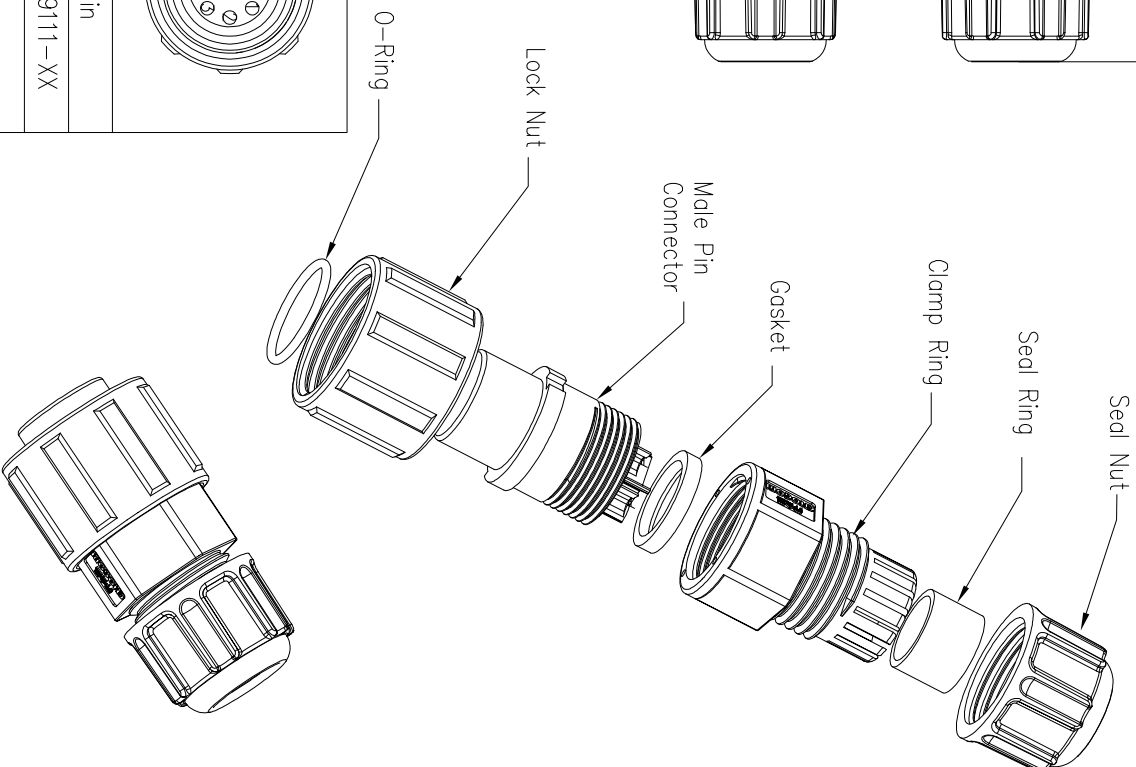
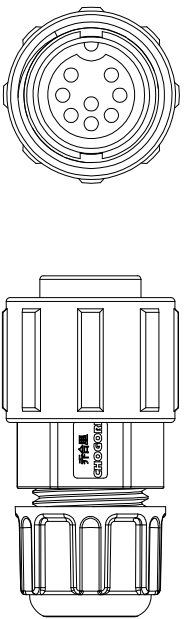


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13



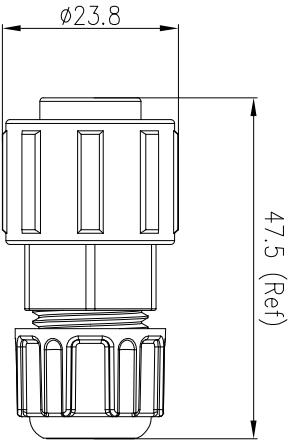


Specification:

- 1.Operation Temperature: -45°C~105°C.
- 2.Insulation Resistance:100M Ω at DC500V.
- 3.Contact Resistance:<10m Ω .
- 4.Withstand Voltage: 1300V AC
- 5.Operating Current:5A
- 6.Operating Voltage: AC 60V
- 7.Waterproof Rate:IP67 (Mated)
- 8.Seal Nut:Nylon, Black
- 9.Seal Ring:Silicon, Black.
- 10.Clamp Ring:Nylon, Black
- 11.Gasket:Silicon, Red
- 12.Lock Nut:Nylon, Black
- 13.Male Pin: Copper Alloy, Gold Plated
- 14.Connector: Nylon+GF, Black
- 15.O-Ring: Silicon, Red
- 16.RoHS Compliant.
- 17.Mating Cap: 806-00026-01

23XXX111-XX Cable Range OD
01 OD: ϕ 3.5mm~ ϕ 6.5mm
02 OD: ϕ 6.5mm~ ϕ 9.5mm

Pin Number



7 Pin

8 Pin

9 Pin

P/N: 23007111-XX

P/N: 23008111-XX

P/N: 23009111-XX

Pin Assignments Front View



UNIT:mm

DESCRIPTION

Middle Series Screw
Male Plug With Male Pin

PART NO

23XXX111-XX

DRAWN BY

Liu

DATE

2019/08/13

TOLERANCE

.X
.XX
.XXX
ANGLES
 $\pm$ 0.25
 $\pm$ 0.15
 $\pm$ 0.05
 $\pm$ 1°

SCALE

1:1

SHEET

X

OF

X

REV

C1

SIZE

A4

* : Inspection Item

PART NO

23XXX111-XX

DRAWN BY

Liu

DATE

2019/08/13

CHECKED BY

Mo

DATE

2019/08/13

CUSTOMER

APPROVED BY

Panson

DATE

2019/08/13

CHOGORI®