






REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13



Recommended Panel Cut-Out




Panel T: Max 2.5

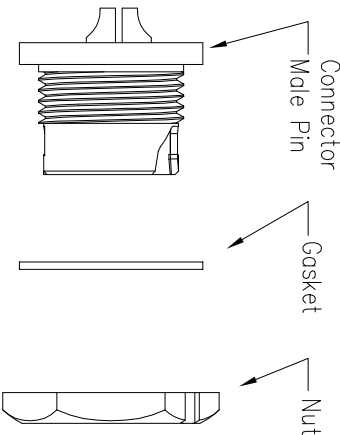


23XXX535-01


Pin Number



7 Pin



8 Pin



9 Pin

P/N: 23007535-01

P/N: 23008535-01

P/N: 23009535-01

Pin Assignments Front View



UNIT: mm

DESCRIPTION

Middle Series Push Lock

Front Mount With Male Pin

TOLERANCE
.X
.XX
.XXX
ANGLES

± 0.25
 ± 0.15
 ± 0.05
 $\pm 1^\circ$

SCALE

1:1

REV

C1

SIZE

A4

* : Inspection Item

SHEET

1

OF

1

CHOGORI®

PART NO

23XXX535-01

DRAWN BY

Liu

DATE

2019/08/13

DWG NO

CHECKED BY

Mo

DATE

2019/08/13

CUSTOMER

APPROVED BY

Panson

DATE

2019/08/13

- Specification:
- 1.Operation Temperature: $-45^{\circ}\text{C}\sim 105^{\circ}\text{C}$.
 - 2.Insulation Resistance: $100\text{M}\Omega$ at DC500V.
 - 3.Contact Resistance: $<10\text{m}\Omega$.
 - 4.Withstand Voltage: 1300V AC
 - 5.Operating Current: 5A
 - 6.Operating Voltage: AC 60V
 - 7.Waterproof Rate: IP67 (Mated)
 - 8.Housing: Nylon, Black
 - 9.Male Pin: Copper Alloy, Gold Plated
 - 10.Gasket: Silicon Gray
 - 11.Panel Nut: Nylon, Orange
 - 12.Torque Rate: $0.8\sim 1.0\text{N}\cdot\text{m}$
 - 13.RoHS Compliant.
 - 14:UL Compliant.
 - 15.Mating Cap P/N: 806-00047-00