






REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13



RECOMMENDED PANEL Cut-Out





Panel T: Max 2.2

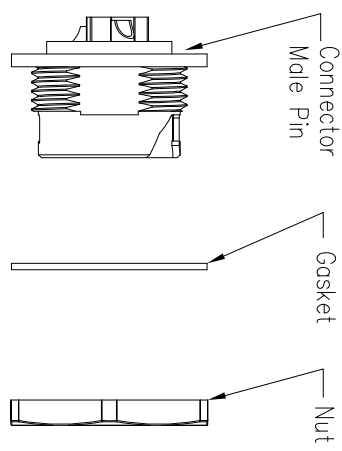

24XXX535-01

Pin Number



2 Pin

3 Pin

P/N: 24002535-01

P/N: 24003535-01

Pin Assignments Front View



DESCRIPTION

Large Series Push Lock
Front Mount With Male Pin

TOLERANCE
.X
.XX
.XXX
ANGLES

SCALE: 1:1
REV: C1
SIZE: A4
SHEET: 1 OF 1
*: Inspection Item

CHOGORI®

PART NO 24XXX535-01

DRAWN BY Liu

DATE 2019/08/13

DWG NO

CHECKED BY Mo

DATE 2019/08/13

CUSTOMER

APPROVED BY Panson

DATE 2019/08/13

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance: 100MΩ at DC500V.
 - 3.Contact Resistance: <10mΩ.
 - 4.Withstand Voltage: 2000V AC
 - 5.Operating Current: 20A
 - 6.Operating Voltage: AC 300V
 - 7.Waterproof Rate: IP67 (Mated)
 - 8.Housing: Nylon, Black
 - 9.Male Pin: Copper Alloy, Gold Plated
 - 10.Gasket: Silicon Gray
 - 11.Panel Nut: Nylon, Orange
 - 12.Torque Rate: 0.8~1.0N•m
 - 13.RoHS Compliant.
 - 14.UL Compliant.
 - 15.Mating Cap P/N: 806-00102-00