




REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	Initial Drawing	Xinkunfu	2019/08/13




Panel Cut-Out



PCB Layout

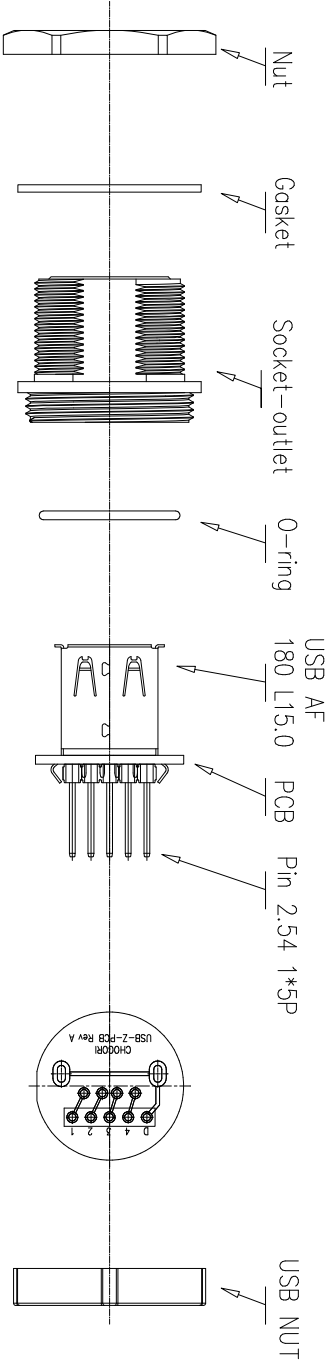

Panel Thickness≤4.0mm

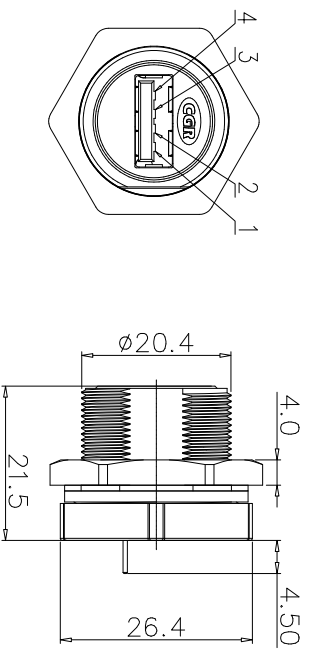

NOTE:

- 1.Contact Resistance: ≤30mΩ
- 2.Breakdown Voltage: >500V/1minute
- 3.Insulation Resistance: >1000MΩ
- 4.Temperature Rating: -45℃~+85℃
- 5.Nut: Nylon+GF
- 6.Gasket: Silicon
- 7.Socket-outlet: Nylon+GF
- 8.O-ring: Silicon
- 9.PCB: FR-4
- 10.NUT: Nylon+GF
- 11.Waterproof Rate: IP67(Mated)
- 12.RoHS Compliant

UNIT: mm	DESCRIPTION	PART NO	DRAWN BY	DATE
TOLERANCE	USB A Type Female Conn.(Screw Type)	340000000-03	Xinkunfu	2019/08/13
.X	Panel Front Mount, PCB	DWG NO	CHECKED BY	DATE
.XX		1:1	Allen	2019/08/13
.XXX		SHEET 1 OF 1	APPROVED BY	DATE
ANGLES		* : Inspection Item	Panson	2019/08/13