

Description

- Dual winding inductors that can be used as either a single inductor, or in coupled inductor/transformer applications (1:1 turns ratio)
- Windings can be connected in series or parallel, offering a broad range of inductance and current ratings
- Current Range from 6.43 to 0.063 Amps
- Inductance range from 0.47 μ H to 4.03mH
- Ferrite shielded, low EMI
- Ferrite core material




Applications

- As a transformer: SEPIC, flyback
- As an inductor: Buck, boost, coupled inductor
- Digital cameras, CD players, cellular phones, and PDA's
- PCMCIA cards
- GPS systems

Environmental Data

- Storage temperature: -40°C to +125°C
- Operating temperature: -40°C to +85°C (Range is application specific). Temperature rise is approximately 40°C at rated rms current.
- Solder reflow temperature: 260°C max. for 10 seconds max.

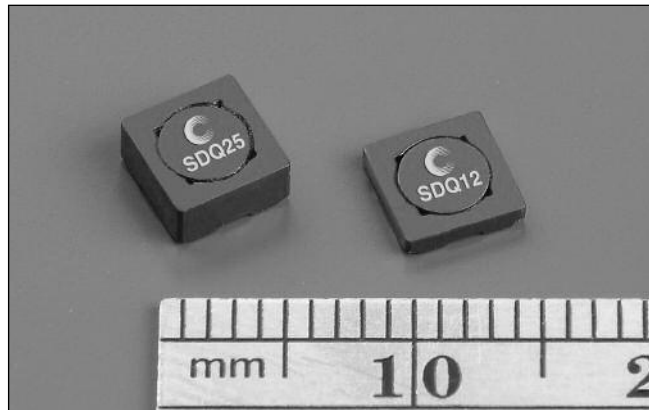

Packaging

- Supplied in tape and reel packaging, SDQ12 (3,800, SDQ25 (2,900) parts per reel

Part Number	Rated Inductance (μ H)	Part Marking	Parallel Ratings					Series Ratings				
			OCL (1) +/-20% (μ H)	I rms (2) Amperes	I sat (3) Amperes	DCR Ω (4) typ.	Volt (5) μ -Sec typ.	OCL (1) +/-20% (μ H)	I rms (2) Amperes	I sat (3) Amperes	DCR Ω (4) typ.	Volt (5) μ -Sec typ.
SDQ12-R47-R	0.47	A	0.49	2.78	4.34	0.0325	2.45	1.96	1.39	2.17	0.1298	4.90
SDQ12-1R0-R	1	B	0.81	2.49	3.38	0.0403	3.15	3.24	1.25	1.69	0.1611	6.30
SDQ12-1R5-R	1.5	C	1.69	1.69	2.34	0.0870	4.55	6.76	0.847	1.17	0.3481	9.10
SDQ12-2R2-R	2.2	D	2.25	1.60	2.03	0.0977	5.25	9.00	0.800	1.01	0.3908	10.5
SDQ12-3R3-R	3.3	E	3.61	1.28	1.60	0.1527	6.65	14.44	0.640	0.800	0.6106	13.3
SDQ12-4R7-R	4.7	F	4.41	1.12	1.45	0.1990	7.35	17.64	0.560	0.724	0.7959	14.7
SDQ12-6R2-R	6.2	G	6.25	1.02	1.22	0.2387	8.75	25.00	0.512	0.608	0.9548	17.5
SDQ12-8R2-R	8.2	H	8.41	0.868	1.05	0.3318	10.15	33.64	0.434	0.524	1.33	20.3
SDQ12-100-R	10	J	9.61	0.831	0.981	0.3620	10.85	38.44	0.416	0.490	1.45	21.7
SDQ12-150-R	15	K	15.21	0.658	0.779	0.5766	13.65	60.84	0.329	0.390	2.31	27.3
SDQ12-220-R	22	L	22.09	0.548	0.647	0.8332	16.45	88.36	0.274	0.323	3.33	32.9
SDQ12-330-R	33	M	32.49	0.439	0.533	1.29	19.95	130.0	0.220	0.267	5.18	39.9
SDQ12-470-R	47	N	47.61	0.401	0.441	1.55	24.15	190.4	0.201	0.220	6.21	48.3
SDQ12-680-R	68	O	68.89	0.326	0.366	2.36	29.05	275.6	0.163	0.183	9.43	58.1
SDQ12-820-R	82	P	82.81	0.309	0.334	2.62	31.85	331.2	0.154	0.167	10.49	63.7

- 1) Test Parameters: 100kHz, 0.25 Vrms 0.0Adc
- 2) Rms current for approximately ΔT of 40°C without core loss. It is recommended that the temperature of the part not to exceed 125°C. De-rating is necessary for AC currents
- 3) Peak current for approximately 30% rolloff @20°C
- 4) DCR limits @20°C
- 5) Applied Volt-Time product (V- μ S) across the inductor at 100kHz necessary to generate a core loss equal to 10% of the total losses for a 40°C temperature rise. De-rating of the I rms is required to prevent excessive temperature rise.

Part number definition:
First 3 characters = Product code and size.
Last 3 characters = Inductance in μ H. R = Decimal point. If no R is present, third character = # of zeros.

SDQ12-XXX-R
SDQ12 = Product code and Size
XXX = Inductance in μ H, R = Decimal point
If no R is present, third character = # of zeros.
-R suffix indicated RoHS compliant


Part Number	Rated Inductance (μH)	Part Marking	Parallel Ratings					Series Ratings				
			OCL (1) +/-20% (μH)	I rms (2) Amperes	I sat (3) Amperes	DCR Ω (4) typ.	Volt (5) μ-Sec typ.	OCL (1) +/-20% (μH)	I rms (2) Amperes	I sat (3) Amperes	DCR Ω (4) typ.	Volt (5) μ-Sec typ.
SDQ25-R47-R	0.47	A	0.392	3.71	6.43	0.0181	2.31	1.57	1.86	3.21	0.0725	4.62
SDQ25-R82-R	0.82	B	0.648	3.37	5.00	0.0221	2.97	2.59	1.68	2.50	0.0883	5.94
SDQ25-1R0-R	1	C	0.97	3.15	4.09	0.0252	3.63	3.87	1.58	2.05	0.1007	7.26
SDQ25-1R5-R	1.5	D	1.35	2.97	3.46	0.0283	4.29	5.41	1.49	1.73	0.1130	8.58
SDQ25-2R2-R	2.2	E	2.31	2.67	2.65	0.0351	5.61	9.25	1.34	1.32	0.1402	11.2
SDQ25-3R3-R	3.3	F	2.89	2.50	2.37	0.0399	6.27	11.55	1.25	1.18	0.1595	12.5
SDQ25-4R7-R	4.7	G	5	1.96	1.80	0.0653	8.25	20.00	0.98	0.900	0.2612	16.5
SDQ25-6R8-R	6.8	H	6.73	1.84	1.55	0.0741	9.57	26.91	0.918	0.776	0.2964	19.1
SDQ25-8R2-R	8.2	J	8.71	1.57	1.36	0.1015	10.9	34.85	0.785	0.682	0.4059	21.8
SDQ25-100-R	10	K	9.8	1.53	1.29	0.1068	11.6	39.20	0.765	0.643	0.4273	23.1
SDQ25-150-R	15	L	14.79	1.24	1.05	0.1632	14.2	59.17	0.619	0.523	0.6526	28.4
SDQ25-220-R	22	M	22.47	1.01	0.849	0.2431	17.5	89.89	0.507	0.425	0.9724	35.0
SDQ25-330-R	33	N	33.8	0.812	0.692	0.3795	21.5	135.2	0.406	0.346	1.52	42.9
SDQ25-470-R	47	O	47.43	0.749	0.584	0.4461	25.4	189.7	0.374	0.292	1.78	50.8
SDQ25-680-R	68	P	69.19	0.603	0.484	0.6865	30.7	276.8	0.302	0.242	2.75	61.4
SDQ25-820-R	82	Q	81.61	0.580	0.446	0.7435	33.3	326.4	0.290	0.223	2.97	66.7
SDQ25-101-R	100	R	98.57	0.499	0.405	1.00	36.6	394.3	0.249	0.203	4.02	73.3
SDQ25-151-R	150	S	150.2	0.408	0.328	1.50	45.2	600.6	0.204	0.164	6.00	90.4
SDQ25-221-R	220	T	223.1	0.326	0.269	2.36	55.1	892.4	0.163	0.135	9.42	110
SDQ25-331-R	330	U	329.7	0.292	0.222	2.93	67.0	1318.7	0.146	0.111	11.71	134
SDQ25-471-R	470	V	472.4	0.243	0.185	4.25	80.2	1889.6	0.121	0.093	16.99	160
SDQ25-681-R	680	W	677.4	0.197	0.155	6.45	96.0	2709.8	0.098	0.077	25.78	192
SDQ25-821-R	820	X	824.3	0.186	0.140	7.25	106	3297.3	0.093	0.070	28.99	212
SDQ25-102-R	1000	Y	1008.2	0.160	0.127	9.82	117	4032.8	0.080	0.063	39.26	234

- 1) Test Parameters: 100kHz, 0.25 Vrms 0.0Adc
- 2) Rms current for approximately ΔT of 40°C without core loss. It is recommended that the temperature of the part not to exceed 125°C. De-rating is necessary for AC currents
- 3) Peak current for approximately 30% rolloff @20°C
- 4) DCR limits @20°C
- 5) Applied Volt-Time product (V-μS) across the inductor at 100kHz necessary to generate a core loss equal to 10% of the total losses for a 40°C temperature rise. De-rating of the I rms is required to prevent excessive temperature rise.

Part number definition:
First 3 characters = Product code and size.
Last 3 characters = Inductance in uH. R = Decimal point. If no R is present, third character = # of zeros.

SDQ12-XXX-R
SDQ12 = Product code and Size
XXX = Inductance in uH, R = Decimal point
If no R is present, third character = # of zeros.
-R suffix indicated RoHS compliant

Mechanical Diagrams

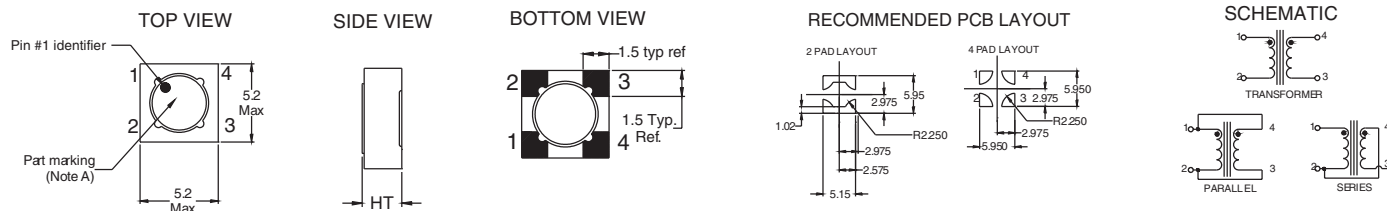


Series	HT
SDQ12	1.2mm max
SDQ25	2.5mm max

A) Part marking: Line 1 (1st digit inductance value per part marking designator in chart above)
(2nd digit is a bi-weekly production date code)
(3rd digit is the last digit of the year produced)
Line 2: xx (indicates the product size code)

Packaging Information


SDQ12 Series

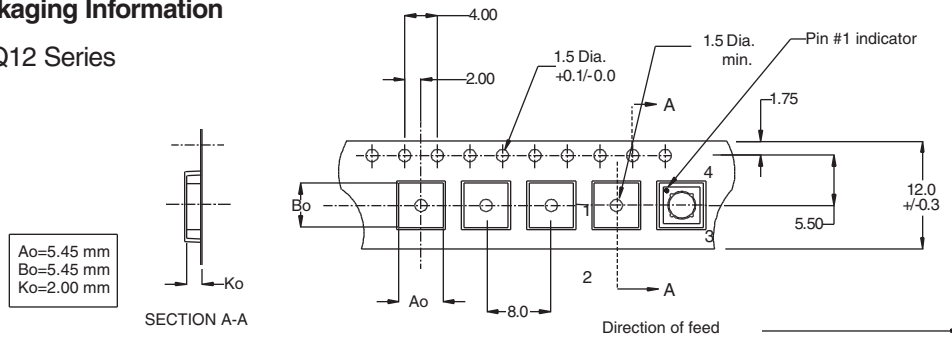

ACTUAL SIZE
SDQ12

Parts packaged on 13" Diameter reel,
3,800 parts per reel.



SDQ25 Series

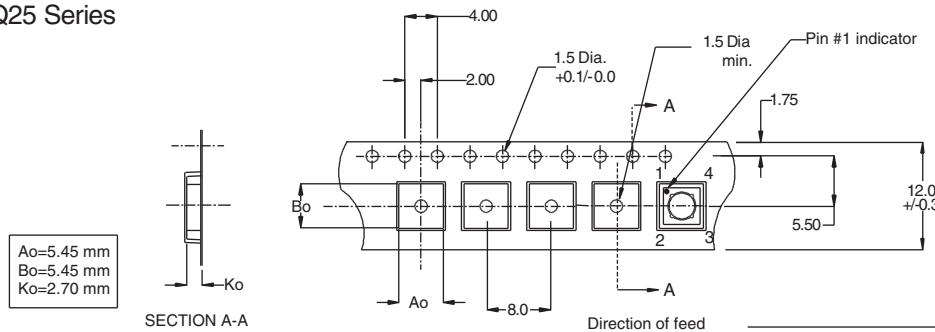

ACTUAL SIZE
SDQ25

Parts packaged on 13" Diameter reel,
2,900 parts per reel.

Inductance Characteristics

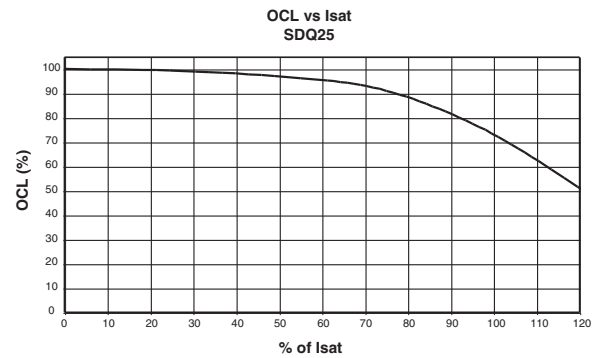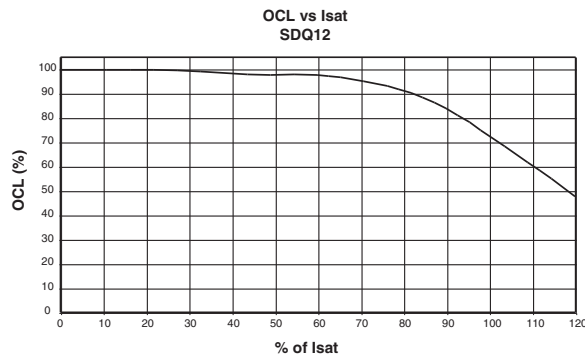

Core Loss

