


SPECIFICATIONS



Model Number: SU2B1
Part Number: 19028268A
SPEC Number: 26014516A

Feb.09.2012

Mechanical Drawing:

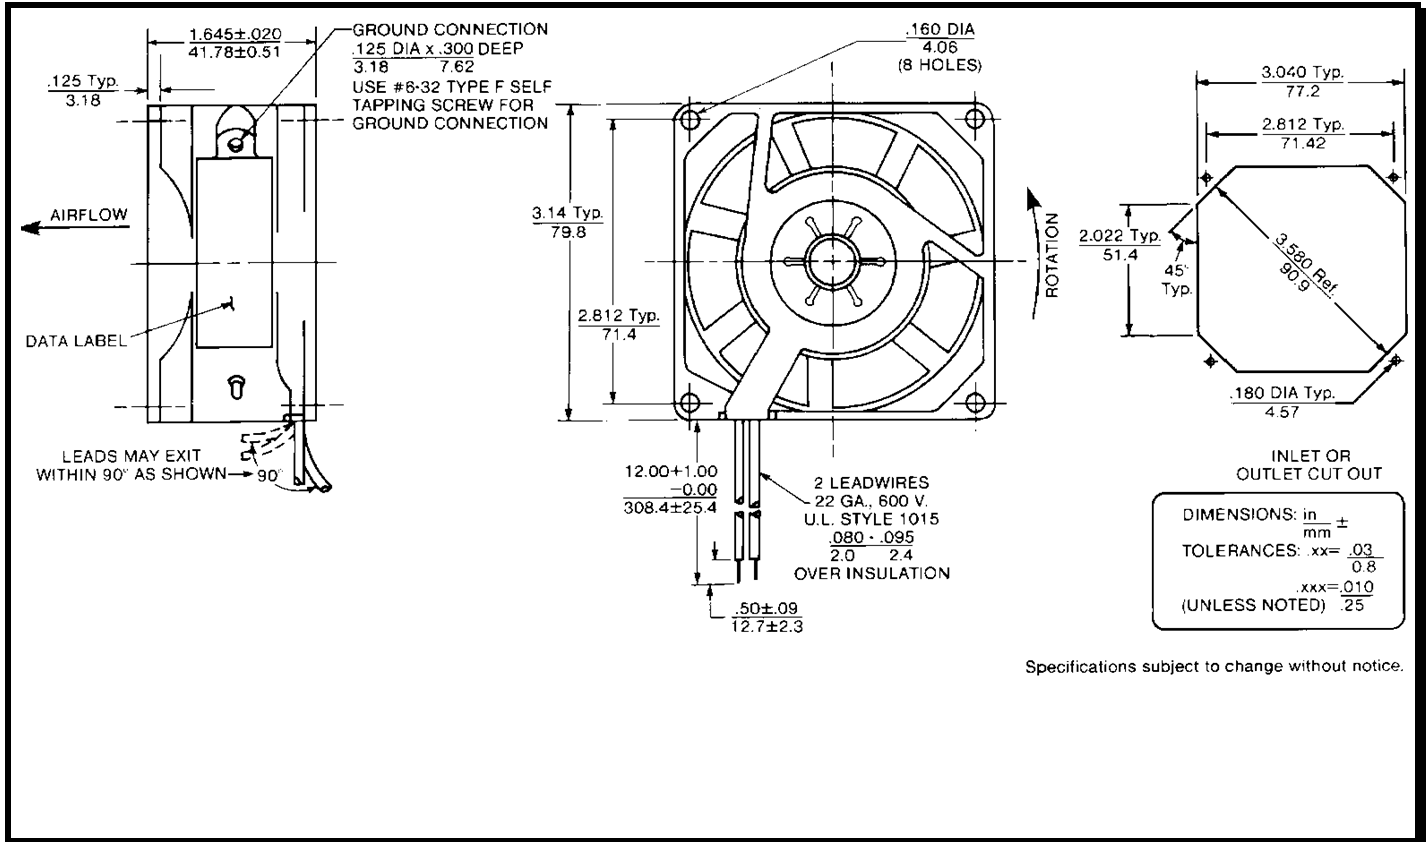

Specifications subject to change without notice.

Motor:

Nominal Voltage	= 115 VAC
Frequency	= 50 / 60 Hz
Nominal Running Current	= 0.190 / 0.150 amps
Locked Rotor Current	= 0.240 / 0.245 amps
Running Power	= 13.0 / 11.0 watts
Average Speed	= 2750 / 3250 RPM
Bearings	= Ball
Air Flow	= 28 / 34 CFM
Acoustic	= 35 / 41 dBA

Construction:

Venturi: Zinc Alloy, Black
 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 40°C.

Additional Features:

Shaded Pole Induction Motor
 Impedance Protected
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Agency Approvals:

UL, RoHS

Lead wires:

12" Lead wires, 22 AWG, UL 1015