

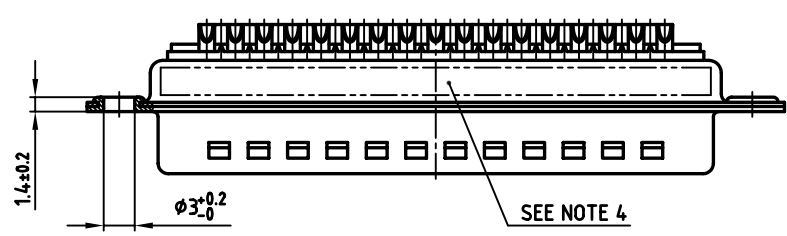
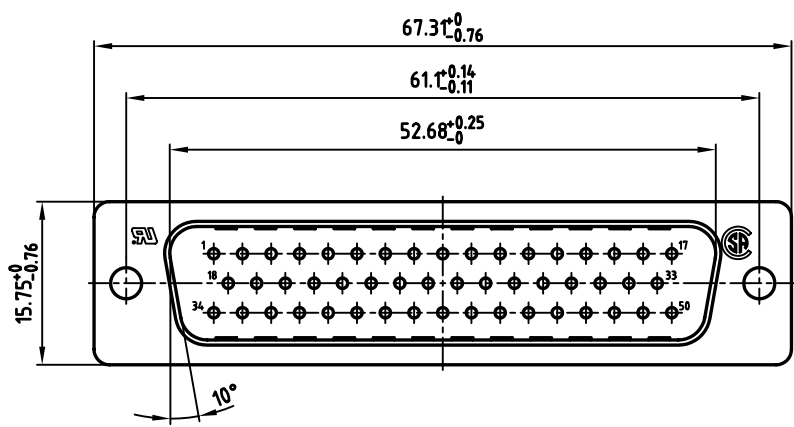


6 5 4 3 2 1 used for: D-SUB

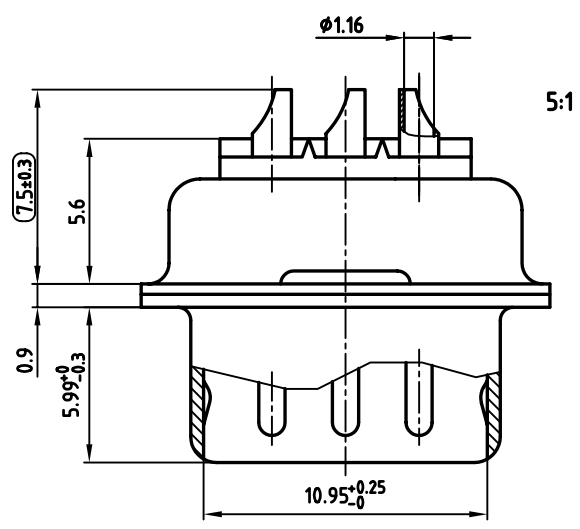

SEE NOTE 4

NOTES:

- 1. METALSHELLS: STEEL; min. 320µ" TIN
- 2. INSULATORS: PBT GF UL 94 V-0, BLACK
- 3. CONTACTS: COPPER ALLOY
- PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- SOLDER CUP ACCEPTS CABLE AWG 20
- 4. CONNECTOR IS PART MARKED: 163A11109X CONEC ABC
- 5.  = CRITICAL DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	date	name
2006	08.02.	Lehmenkühler
drawn	08.02.	Mickenbecker
appd.		
norm		
d-old		

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB MALE 50pos. SOLDER CUP	
dwg no:	AutoCAD 2004 DIN-A
16K1A1740	3
part no:	163A11109X
sh: 1/1	