
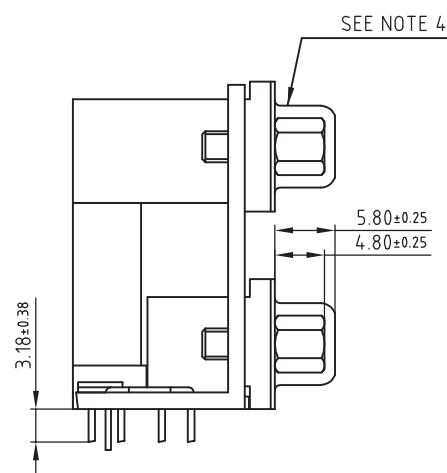


#4-40 THREADED HOLE WITH #4-40UNC
SCREWLOCK INSTALLED (4.8x11.8)

used for: D-SUB

SPECIFICATIONS


1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 mOhm max.
- 1.4 Insulation Resistance: 5000 MOhms min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 9.4 Kgf max.
- 1.7 Total Unmating Force: 1.4 Kgf min.
- 1.8 Operating Temperature: -55°C to +85°C

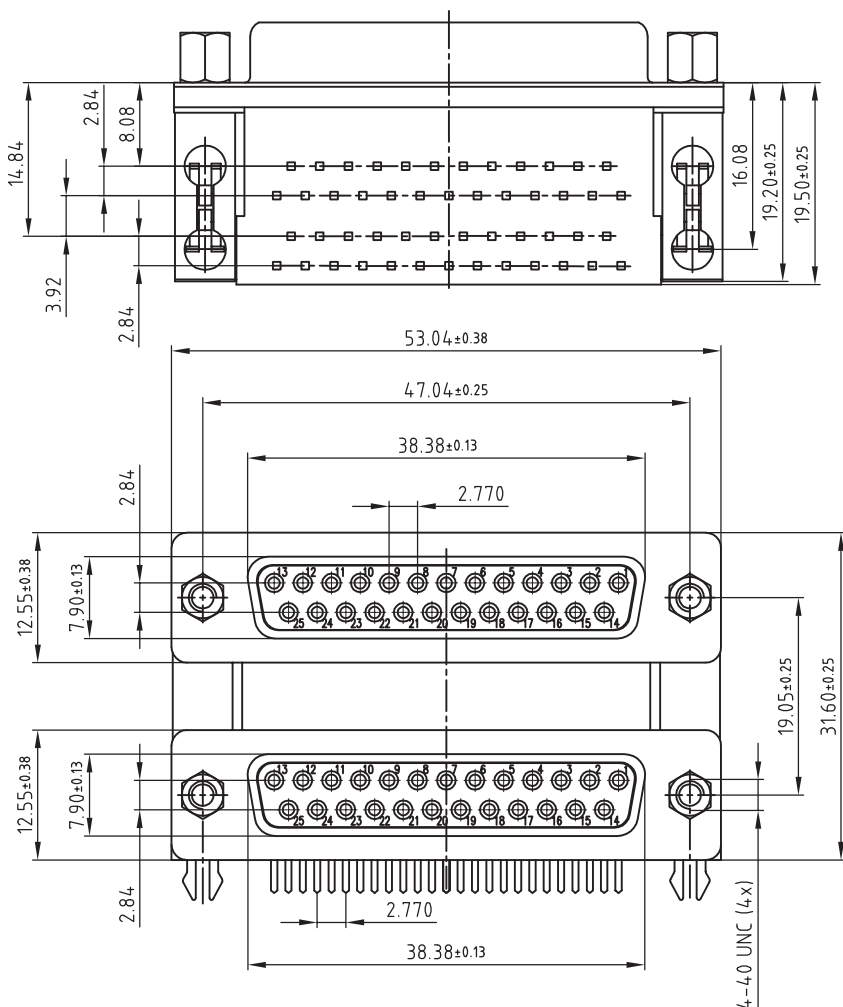

NOTES

1. MATERIAL:
 - Housing: PBT, UL 94V-0, Color:Black.
 - Terminal: Copper Alloy.
 - Shell: SPCC.
 - Boardlock: Copper Alloy.
 - Bracket: Zinc Alloy.
2. FINISH:
 - Terminal: Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Area.
 - Shell: Nickel Plated.
 - Boardlock: Tin Plated.
 - Bracket: Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.
4. Connector is part marked: 33-000323 CONEC ABC

RECOMMENDED P.C.B LAYOUT

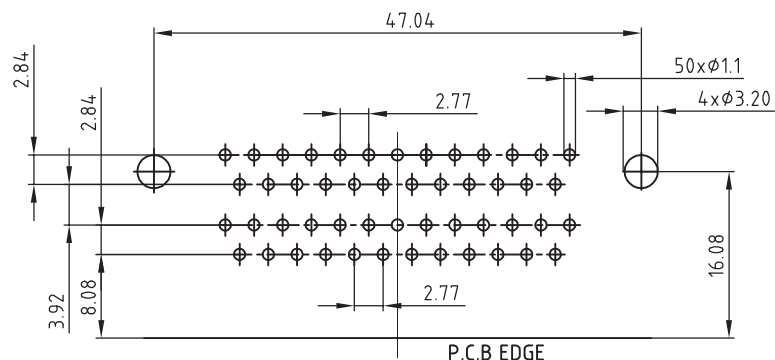

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC Gmbh
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

tolerance	dim. in mm
.XX ±0.25	
.XXX ±0.13	
2012	date
drawn	08.06.
appd.	08.06.
norm	
d-old	

scale:	2:1
material:	SEE SPECIFICATION
title:	D-SUB DUAL PORT 19.05mm FEMALE / FEMALE 2x25pos. with PCB clip and screwlocks
dwg no:	33K1A026
part no:	33-000323

DIN-A
3
sh: 1/1