



## 83589 Top-mounted plunger Part number 83589031



- Press button protected by O-ring and scraper seal

### Part numbers

	Type	Housing	Features
83 589 031	Top-mounted plunger	Thermoplastic	Standard

### Specifications

Conformity to standards	NFC 20030 class I (the plunger is operated manually by an earthed metal part, or by an insulated part which provides additional insulation).
Version	Single-pole
Protection	IP66 resistant to hydrocarbons and saline mist (400 hours)

### Electrical characteristics

Electrical endurance	Standard : 8 A 250 VAC : 30,000 operations 200 mA 24 V DC relay load L / R = 3 ms 10 <sup>7</sup> operations Dual-current : 1 mA 4 VAC : 10 <sup>7</sup> operations 200 mA 24 V DC relay load L / R = 3 ms 5 x 10 <sup>6</sup> operations 5 A 250 VAC : 30,000 operations
Dual-current	This version is designed to operate both on dual-current (1 mA 4 V minimum) and medium-current (5A) circuits. However, a given product should only be used to switch one type of circuit during its working life.

### Connections

Cable	PVC Ø5 - 3 x 0.75 mm <sup>2</sup> Length 0.50 m Conforming to NFR 13414/13415
Mounting	Max. tightening torque 9 Nm

### Mechanical characteristics

Minimum operating force (N)	10
Minimum total travel force (N)	15
Minimum operating travel (mm)	2
Differential travel (mm)	0,1
Maximum total travel (mm)	4,5
Mechanical life (millions of operations) mini.	10 <sup>7</sup>
Operating temperature (°C)	-40 → +85
Protection rating	IP66/67
Weight (g)	80

### Additional characteristics

#### Material

- Case : Thermoplastic polyester
- Plunger : Stainless steel
- Contact : Agcdo - AgNi (gold-plated)
- Nuts : Galvanized steel

#### Sealing


- O-ring : Silicon
- Scraper seal : Teflon
- PU resin

**Principles****Function**

Single break two-way contact element (form C : changeover)

N°	Legend
①	Black (common)
②	Grey (NC)
④	Blue (NO)

**Dimensions (mm)****Product**

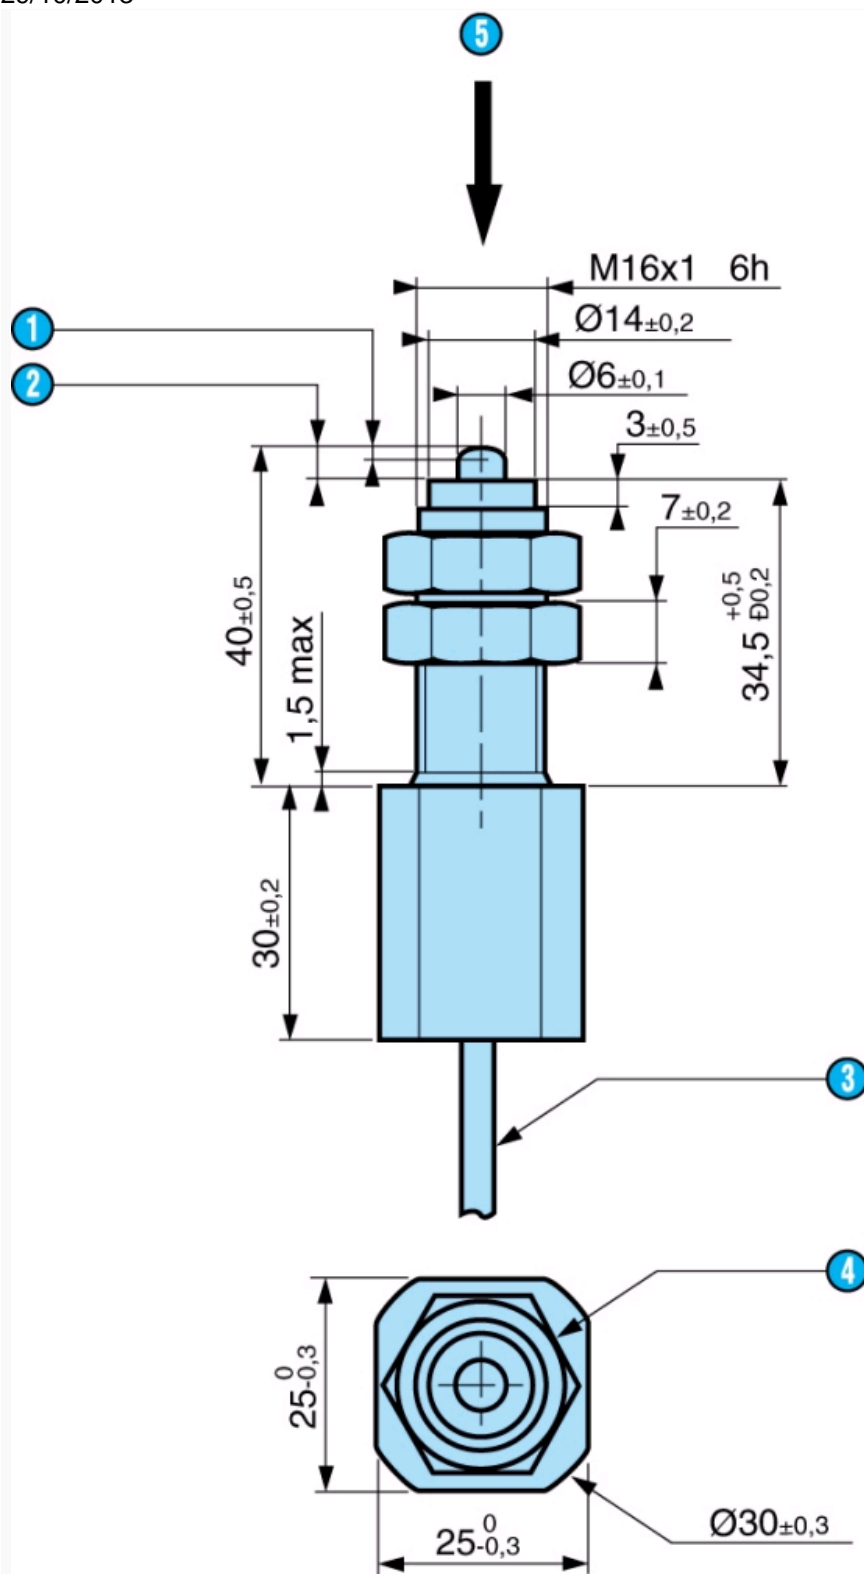

N°	Legend
1	Operating travel
2	Total travel
3	Cable Ø5 - 3 x 0.75 mm <sup>2</sup> Length 0.50 m
4	21 across flats
5	Direction of operation