

# Chronos 2 electronic timers - Plug-in 8-pin (35 mm)

## Relay output 1 or 2 change over relays

- Multi-function or mono-function
- Multi-range (7 ranges, available options)
- Multi-voltage
- Relay output 1 or 2: 8 A - 250 V (10 A UL)
- Plug-in
- 1 LED status indicators
- Option of connecting an external power supply to the control input
- 3-wire sensor control option

## Technical specifications

### Timing

Repetition accuracy (with constant parameters)  $\pm 0.5\%$  (CEI 1812-1)

### Drift

- Temperature  $\pm 0.05\%$  / °C

- Voltage  $\pm 0.2\%$  / V

Display precision according to IEC 1812-1  $\pm 10\%$  / 25 °C

Minimum pulse duration

- Typically 30 ms

- Typically under load 100 ms

Maximum reset time by de-energisation

- Typically 100 ms

Immunity to breaks in supply voltage: typically >10 ms

### Power supply

Multi-voltage power supply depending on version, see page 1/21

Frequency 50/60 Hz

Operating range

85 to 110 % Un (85 to 120 % Un for 12V AC/DC)

Load factor 100 %

Maximum power consumption 0.6 W 24V AC/DC

1.5 W 230V AC

32 VA 230V AC

### Output elements relay output

1 or 2 changeover relays, AgNi (cadmium-free) 2000 VA / 80 W

Rated power 2000 V A / 80W

Maximum breaking current 8 A AC 8 A DC

Minimum breaking current 10 mA / 5 VDC

Voltage breaking capacity 250V AC/VDC

Electrical life  $10^5$  operations

8 A 250V resistive

Mechanical life  $5 \times 10^6$  operations

Breakdown voltage acc. to IEC 1812-1 2.5 kV / 1min /

1 mA /50Hz

Impulse voltage acc. to IEC 664-1 IEC 1812-1 5 kV, wave 1.2 / 50  $\mu$ s

### Display

State displayed by 1 LED

- Flashing green when on

Green LED operation indicator

..... Pulsing:

- timer on, no timing in progress

(except functions Di-D and Li-L)

..... Flashing:

- timing in progress

..... Permanently lit:

- Relay waiting, no timing in progress

Input type

- Volt-free contact

- 3-wire PNP output control option maximum 0.4 V

residual voltage: 0.4 V whatever the timer power

supply

## Other information

Non stocked, minimum order quantity 100 units.

## Timing

## Types

## Part numbers and voltage

24V  $\equiv$  / 24 • 240V  $\sim$

12 V  $\sim$  /  $\equiv$

12 • 240 V  $\sim$  /  $\equiv$

## Functions

## Nominal current

## Accessories

8-pin connector base (for the whole range)

128

## Timing ranges (7 ranges)

1s - 10 s - 1 min - 10 min - 1 h - 10 h - 100 h

## General specifications

Conforming to standards

IEC 1812-1, EN 50081-1/2, EN 50082-1/2, LV directives (73/23/EEC + 93/68/EEC (CE marking) + EMC (89/336/EEC + IEC 669-2-3 (17.5 mm)

Approvals

UL - CSA - cUL pending

Temperatures limits

- use -20 °C + 60 °C

- stored -30 °C + 60 °C

Installation category (acc. to IEC 664-1) Voltage surge category

Creepage distance and clearance acc. to IEC 664-1 4 kV / 3

Degree of protection acc. to IEC 529

- terminal block IP 20

- casing IP 40

- front face (except Tk2R1) IP 50

Vibration resistance acc. to IEC 68-2-6 f = 10 • 55 Hz A = 0.35 mm

Relative humidity acc. to IEC 68-2-3 without condensation 93 %

Electromagnetic compatibility Level III

- Immunity to electrostatic discharges acc. to (Air 8 K /

IEC 1000-42 Contact 6 kV)

- Immunity to electrostatic fields acc. to Level III 10V/m:

ENV 50140/204 (IEC 1000-4-3) 80 MHz to 1 GHz)

- Immunity to rapid transient bursts acc. to IEC Level III (direct 2kV/

1000-4-4 Capacitive coupling

clamp 1 kV)

- Immunity to shock waves on power supply acc. Level III (common

to IEC 1000-4-5 mode 2 kV / residual

current mode 1kV)

- Immunity to radiofrequency in common mode Level III (10V rms:

acc. to ENV 0.15 MHz to 80 MHz)

- Immunity to voltage dips and breaks acc. to 30 % / 10 ms

IEC 1000-4-11 60 % / 100 ms >

95 % / 5 s







- Mains-borne and radiated emissions acc. to Class B

EN 55022 (EN 55011 Group 1) 8-pin

Fixing: plug-in bases Self-extinguishing

Casing material 80 g

Weight: plug-in casing

					
0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
<b>OUR1</b>	<b>OA2R1</b>	<b>OCR1</b>	<b>OLR1</b>	<b>OUR4</b>	<b>OUR3</b>
<b>88 867 105</b>	<b>88 867 215</b>	<b>88 867 135</b>	<b>88 867 155</b>	<b>88 867 100</b>	<b>88 867 103</b>
Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Mono-function A	Mono-function C	Bifunction Li - L	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw
8 A	8 A	8 A	8 A	8 A	8 A
1 timer	2 timers	1 timer	1 timer	1 timer	1 timer

1

2

3



### Function diagrams

#### Function A

Delay on energisation  
1 relay




2 timers




#### Function At

Timing on energisation with memory  
1 relay



#### Function B

Timing on impulse one shot  
1 relay



#### Function C

Timing after impulse  
1 timer




#### Function H

Timing on energisation  
1 relay



#### Function Ht

Delay on energisation with memory  
1 relay




#### Function L

Asymmetrical recycler 1 relay  
Pause start




#### Function Li

Asymmetrical recycler 1 relay  
Pulse start



#### Function D

Flip-flop 1 relay  
Pause start



#### Function Di

Flip-flop 1 relay  
Pulse start




#### Function Ac

Timing after closing and opening  
of control contact  
1 relay




#### Function Bw


Pulse output (adjustable)  
1 relay




### Connections: 8-pin 1 relay



Functions :  
A - At / H - Ht / B / C  
Di - D / Ac / BW




### 8-pin 2 relay




A

### Dimensions

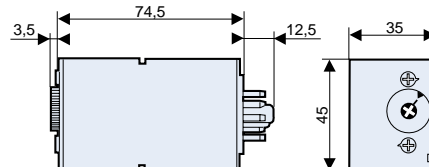

### Accessories



### To order, specify:

Standard products

1

Type

2

Part number

3

Part number

Example: Chronos 2 Timers OUR1 88 867 105

8-pin connector base 25 622 128

# Chronos 2 electronic timers - Plug-in 11-pin (35 mm)

## Relay output 2 change over relays

- Multi-function or mono-function
- Multi-range (7 ranges, available options)
- Multi-voltage
- Relays output 1: 8 A - 250 V (10 A UL)
- Plug-in
- 1 LED status indicators
- Option of connecting an external power supply to the control input
- 3-wire sensor control option

## Technical specifications

### Timing

Repetition accuracy (with constant parameters)  $\pm 0.5\%$  (CEI 1812-1)

### Drift

- Temperature  $\pm 0.05\%$  / °C  
- Voltage  $\pm 0.2\%$  / V

Display precision according to IEC 1812-1  $\pm 10\%$  / 25 °C

Minimum pulse duration

- Typically (relay version) 30 ms

- Typically (solid state version) 50 ms

- Typically under load (relay version) 100 ms

Maximum reset time by de-energisation

- Typically (relay version) 100 ms

- Typically (solid state version) 350 ms

Immunity to breaks in supply voltage: typically >10 ms

### Power supply

Multi-voltage power supply depending on version, see page 1/13

Frequency 50/60 Hz

Operating range 85 to 110 % Un  
(85 to 120 % Un for 12V AC/DC)

Load factor 100 %

Maximum power consumption 0.6 W 24V AC/DC  
1.5 W 230V AC  
32 VA 230V AC

### Output elements relay output

1 or 2 changeover relays, AgNi (cadmium-free) 2000 VA / 80 W

Rated power 2000 V A / 80W

Maximum breaking current 8 A AC 8 A DC

Minimum breaking current 10 mA / 5 VDC

Voltage breaking capacity 250V AC/VDC

Electrical life  $10^5$  operations

8 A 250V resistive

Mechanical life  $5 \times 10^6$  operations

Breakdown voltage acc. to IEC 1812-1 2.5 kV / 1min /

1 mA /50Hz

Impulse voltage acc. to IEC 664-1 IEC 1812-1 5 kV, wave 1.2 / 50  $\mu$ s

### Display

State displayed by 1 LED

- Flashing green when on

Green LED operation indicator

..... Pulsing:

- timer on, no timing in progress

(except functions Di-D and Li-L)

..... Flashing:

- timing in progress

..... Permanently lit:

- Relay waiting, no timing in progress

Input type

- Volt-free contact

- 3-wire PNP output control option maximum 0.4 V

residual voltage: 0.4 V whatever the timer power supply

## Timing

## Types

## Part numbers and voltage

24V  $\equiv$  / 24 • 240V  $\sim$

12 V  $\sim$  /  $\equiv$

12 • 240 V  $\sim$  /  $\equiv$

## Functions

## Nominal current

## Accessories

11-pin connector base (for the whole range)

25 622 077

## Timing ranges (7 ranges)

1s - 10 s - 1 min - 10 min - 1 h - 10 h - 100 h

## General specifications

Conforming to standards

IEC 1812-1, EN 50081-1/2, EN 50082-1/2, LV directives (73/23/EEC + 93/68/EEC (CE marking) + EMC (89/336/EEC + IEC 669-2-3 (17.5 mm)

Approvals

UL - CSA - cUL pending

Temperatures limits

- use

-20 °C + 60 °C

- stored

-30 °C + 60 °C

Installation category (acc. to IEC 664-1)

Voltage surge category

Creepage distance and clearance acc. to IEC 664-1

4 kV / 3

Degree of protection acc. to IEC 529

- terminal block

IP 20

- casing

IP 40

- front face (except Tk2R1)

IP 50

Vibration resistance acc. to IEC 68-2-6

f = 10 • 55 Hz  
A = 0.35 mm

Relative humidity acc. to IEC 68-2-3 without condensation

93 %

Electromagnetic compatibility

- Immunity to electrostatic discharges acc. to IEC 1000-42

Level III  
(Air 8 K / Contact 6 KV)

- Immunity to electrostatic fields acc. to ENV 50140/204 (IEC 1000-4-3)

Level III 10V/m:  
80 MHz to 1 GHz)

- Immunity to rapid transient bursts acc. to IEC 1000-4-4

Level III (direct 2kV/  
Capacitive coupling clamp 1 KV)

- Immunity to shock waves on power supply acc. to IEC 1000-4-5

Level III (common mode 2 KV / residual current mode 1KV)

- Immunity to radiofrequency in common mode acc. to ENV

Level III (10V rms:  
0.15 MHz to 80 MHz)

- Immunity to voltage dips and breaks acc. to IEC 1000-4-11

30 % / 10 ms  
60 % / 100 ms >  
95 % / 5 s

- Mains-borne and radiated emissions acc. to EN 55022 (EN 55011 Group 1)

Class B

Fixing: plug-in bases

11-pin

Casing material


Self-extinguishing

Weight: plug-in casing

80 g

## Other information

Non stocked, minimum order quantity 100 units.

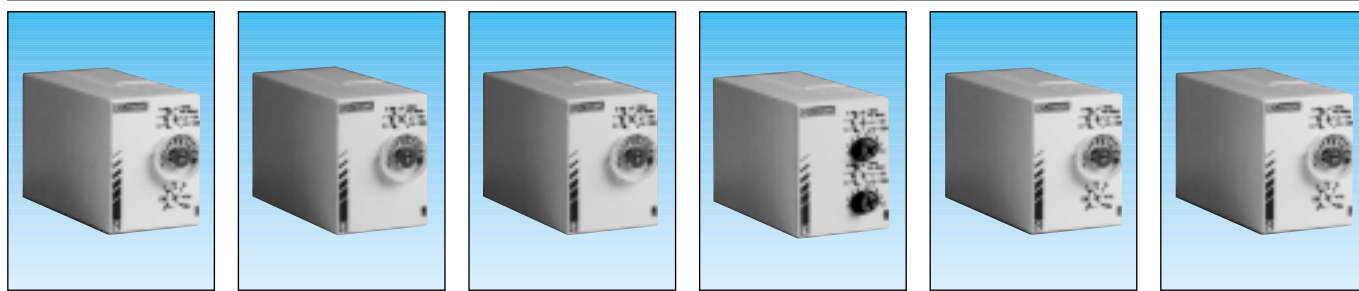

0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
<b>PU2R1</b>	<b>PA2R1</b>	<b>PC2R1</b>	<b>PL2R1</b>	<b>PU2R4</b>	<b>PU2R3</b>
<b>88 867 305</b>	<b>88 867 415</b>	<b>88 867 435</b>	<b>88 867 455</b>	<b>88 867 300</b>	<b>88 867 303</b>
Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Bifunction A - At	Mono-function C	Bifunction Li - L	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw
8 A	8 A	8 A	8 A	8 A	8 A
2 timers including 1 instantaneous	2 timers	2 timers	2 timers	2 timers including 1 instantaneous	2 timers including 1 instantaneous

1

2

3

### Function diagrams


#### Function A

Delay on energisation  
2 timers or  
2 relays, including 1 instantaneous




#### Function C

Timing after impulse  
2 timers or 2 relays,  
including 1 instantaneous




#### Function Ac

Timing after closing and opening  
of control contact  
2 timers or 2 relays,  
including 1 instantaneous




#### Function Bw

Pulse output (adjustable)  
2 timers or 2 relays,  
including 1 instantaneous




#### Function At

Timing on energisation with memory  
2 timers or  
2 relays, including 1 instantaneous



#### Function H

Timing on energisation  
2 timers or 2 relays,  
including 1 instantaneous



#### Function D

Flip-flop  
Pause start  
2 timers or 2 relays,  
including 1 instantaneous




#### Function L

Asymmetrical recycler 1 relay  
Pause start  
2 timers




#### Function B

Timing on impulse one shot  
2 timers or 2 relays,  
including 1 instantaneous




#### Function Ht

Delay on energisation with memory  
2 timers or 2 relays,  
including 1 instantaneous



#### Function Di

Flip-flop  
Pause start  
2 timers or 2 relays,  
including 1 instantaneous




#### Function Li

Asymmetrical recycler 1 relay  
Pulse start  
2 timers




### Connections

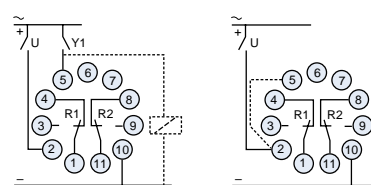


Functions :  
A - At / H - Ht / B / C  
Di - D / Ac / BW

Li :  
L : 2 5

### Dimensions

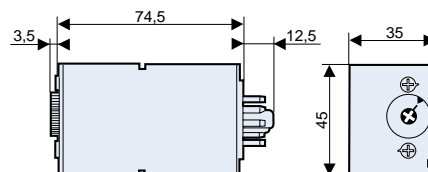

### Accessories



11-pin connector base  
25 622 077

### To order, specify:

Standard products

1 Type

2 Part number

3 Accessorie

Example: Chronos 2 Timers PU2R1 88 867 305

11-pin connector base 25 622 077

# Functions


U : Supply  
R : Output or load relay  
T : Timing  
C (Y1) : Control contact  
: indefinite

## Function A: Delay on energisation

Single timing cycle which begins on energisation.

The output changes state after timing.

2 relays timed or  
1 relay timed and 1 instantaneous



## Function Ab: One-shot cycle

The output changes states at the end of the set time T1, for a period T2.


Both T1 and T2 independently adjustable.



## Function Ac: Timing after closing and opening of control contact

After energisation, closure of the control contact causes the timing period T to commence and output relay R (or the load) changes state at the end of this interval. When contact C (Y1) opens, relay R resets after a second timing period T.

2 relays timed or  
1 relay timed and 1 instantaneous




## Function Ad : Delay on energisation by switch (not resettable)

After power-up, pressing or holding down the switch starts timing. At the end of timing, the output is energised. The output will be reset the next time the switch is pressed or held down.



## Function Ah : Flashing single cycle by switch (not resettable)

After power-up, pressing or holding down the switch starts timing. At the end of timing, the output is energised. At the end of this second timing, the output falls back to its initial value.




## Function At: Timing on energisation with memory

Provides a cumulative time for contact opening.

The output changes states at the end of the set time.

2 relays timed or  
1 relay timed and 1 instantaneous




## Function B: Timing on impulse one shot On pulse (with constant supply)

After energisation; a pulse ( $\geq 50$  ms) or a maintained control contact will cause the output to change state which reverts to the rest position at the end of timing.

N.B. : this process enables shortening or lengthening of a signal.


2 relays timed or  
1 relay timed and 1 instantaneous



## Function Bw: Pulse output (adjustable)

AOutput relay R (or the load) changes state, and remains in the changed-over state for the timing period, both when control contact C (Y1) closes and when it opens.


2 relays timed or  
1 relay timed and 1 instantaneous



## Function C: Timing after impulse Delay OFF (with constant supply)

After energisation, once the control contact is closed the output state changes. Timing will only begin on the re-opening of this control contact (one shot). Relay R returns to its initial position at the end of the timing period.

2 relays timed or  
1 relay timed and 1 instantaneous




## Function D or Di: Flip-flop

Repetitive cycle which switches the output alternately between the rest and operating position for equal time bases.  $T1 + T2 = T$  total


Function D: the cycle begins with the output in rest position. Pause start.

2 relays timed or  
1 relay timed and 1 instantaneous



Function Di: the cycle begins with the output in the operating position. Pulse start.

2 relays timed or  
1 relay timed and 1 instantaneous




## Function H: Timing on energisation Interval timer - one shot

On energisation, the output changes state, remains in that state for the duration of timing and resets at the end of the single cycle.

N.B. This is complementary to function A.


2 relays timed or  
1 relay timed and 1 instantaneous



### Function Ht : Delay on energisation with memory

Provides a cumulative time for contact opening. On energisation, the output changes state, remains in that state for the duration of timing and resets at the end of the single cycle.


2 relays timed or  
1 relay timed and 1 instantaneous



### Function K: Delay on de-energisation - True delay OFF

On energisation, the output changes state. On de-energisation timing commences and the output only returns to the reset condition after timing.

2 relays timed or  
1 relay timed and 1 instantaneous




### Function L : Cyclic timing - Asymmetrical recycler

Repetitive cycle comprising 2 independent adjustable time bases. Each time base corresponds alternately to a different output state.

**N.B. :** The cycle starts with the output in the rest position.

2 relays timed or  
1 relay timed and 1 instantaneous



### Function Li : Cyclic timing - Asymmetrical recycler

Repetitive cycle comprising 2 independent adjustable time bases. Each time base corresponds alternately to a different output state.

**N.B. :** The cycle starts with the output in the operating position.

2 relays timed or  
1 relay timed and 1 instantaneous



### Function N : "Safe-guard"

At the first control pulse the output is energised. To complete the timing interval between the two control pulses must be greater than the timing set.




### Function O : "Delayed safe-guard".

On energisation, a first timing sequence occurs and the output changes state. With the closing of the control contact, the output resets and the timing starts, with the output being activated after timing. For the timing to be completed, the interval between the closing of two control contacts must be greater than the timing set.



### Function P : Delayed fixed-length pulse

Timing begins on energisation. At the end of the timing period output relay R (or the load) changes state for a period of approx. 500 milliseconds.



### Function Pt : Impulse counter (delay on)

Calculates the total opening time of a contact. At the end of timing, the output is energised for approximately 500 ms.



### Function Q : "Star-delta"


At the end of timing, the output is not energised. It remains "open" (not conducting) and will only change state after the fixed time of Ti has elapsed. Dwell time selectable



### Function T : Timing on energisation with memory

#### a - energisation by control signal

The timer sums the times for which the control contact is closed (C1). Reset is by the reset signal (C2) only.




#### b - energisation by supply voltage

The timer sums the times for which the supply voltage (U) is on. Reset is by the reset signal (C2) only




### Function T : Impulse relay

After power-up, pressing or holding down the switch closes the relay. Pressing the switch a second time opens the relay.



### Function Tt : Timed impulse relay

After power-up, pressing or holding down the switch closes the relay and starts timing. The relay opens at the end of timing or when the switch is pressed a second time.



### Function W : Timing after pulse on control contact

After energisation, if the control contact opens it causes output relay R (or the load) to change state and timing to start. At the end of the timing period, relay R resets to its original state.

