




CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

1	NOMINAL SIZE	32 x 32 x 14.5 mm.		inch.
2	IMPEDANCE	8 $\Omega \pm 15\%$	at 1K Hz.	1 V.
3	RESONANCE FO	250 Hz $\pm$ 50 Hz.	FO Hz.	1 V.
4	S.P. LEVEL	86 dB/w $\pm$ 3 dB	1 w 50 cm average at 400,500,600,800 Hz.	
5	RESPONSE	MAX Fo Hz~ 15K Hz 10 dB		
6	CROSSOVER FREQ.	Hz Hz	dB/OCT	Net work
7	INPUT POWER	Nominal input 2 w.	Handling Capacity	4 w.
8	OPERATION	Must be normal at program source 2 w.		
9	BUZZ, RATTLE, ETC.	Must be normal at Since Wave 4 V.		
10	FLUX DENSITY	Gauss $\pm$ 10%		
11	TOTAL FLUX	Max well min		
12	MAGENET	Size 18.7 x 4.0 mm	gr	oz
13	TOTAL WEIGHT		gr	oz
14	LOAD TEST	After test meet Item 9 and 10	White noise 2 W.	24 Hours
15	DISTORTION	% MAX	Hz	W.
16	HEAT TEST	After test meet Item 9 and 10	65 $\pm$ 2 $\pm$ °C 20-50 %R. H	24 Hours
17	HUMIDITY TEST	After test meet Item 9 and 10	40 $\pm$ 2 $\pm$ °C 90-95 %R. H	24 Hours

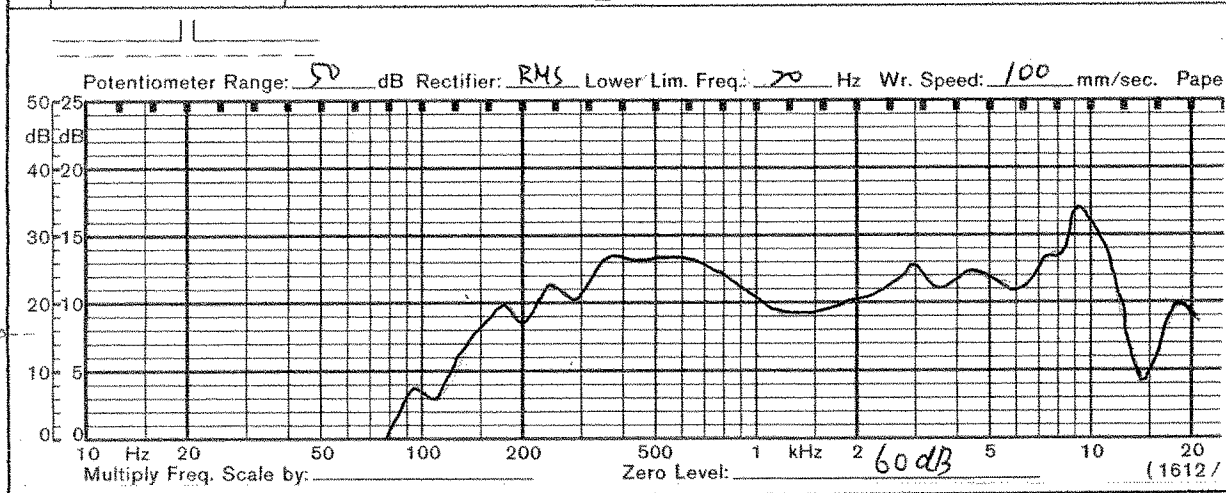

PART NO.	CMS0321KLX	UNITS:	mm
TOLERANCE:	± 1.5	PAGE NO:	1 of 2

