




CUI INC

9615 SW Allen, Suite 103  
Beaverton, OR 97005  
Phone: (503) 643-4899  
800-275-4899  
Fax: (503) 372-1266  
Website: www.cui.com

|    |                    |                                       |                                             |             |          |
|----|--------------------|---------------------------------------|---------------------------------------------|-------------|----------|
| 1  | NOMINAL SIZE       | 36 x 36 x 14.5H mm. inch.             |                                             |             |          |
| 2  | IMPEDANCE          | 8 $\Omega \pm 15\%$                   | at.                                         | 1K Hz.      | 1 V.     |
| 3  | RESONANCE FO       | 230 Hz. $\pm$ 46 Hz.                  | FO Hz.                                      | 1 V.        |          |
| 4  | S.P. LEVEL         | 82 dB/w $\pm$ 3 dB                    | 1 w 50 cm average at<br>300,400,500,600 Hz. |             |          |
| 5  | RESPONSE           | MAX<br>Fo Hz~ 20K Hz 10 dB            |                                             |             |          |
| 6  | CROSSOVER FREQ.    | Hz Hz                                 | dB/OCT                                      | Net work    |          |
| 7  | INPUT POWER        | Nominal input 2 w.                    | Handling Capacity                           | 4 w.        |          |
| 8  | OPERATION          | Must be normal at program source 2 w. |                                             |             |          |
| 9  | BUZZ, RATTLE, ETC. | Must be normal at Since Wave 4 V.     |                                             |             |          |
| 10 | FLUX DENSITY       | Gauss $\pm 10\%$                      |                                             |             |          |
| 11 | TOTAL FLUX         | Max well min                          |                                             |             |          |
| 12 | MAGENET            | Size 18.7 x 4.0 mm                    | gr                                          | oz          |          |
| 13 | TOTAL WEIGHT       |                                       | gr                                          | oz          |          |
| 14 | LOAD TEST          | After test meet<br>Item 9 and 10      | White noise                                 | 2 W.        | 24 Hours |
| 15 | DISTORTION         | % MAX                                 | Hz                                          | W.          |          |
| 16 | HEAT TEST          | After test meet<br>Item 9 and 10      | 65 $\pm 2$ $^{\circ}\text{C}$               | 20-50 %R. H | 24 Hours |
| 17 | HUMIDITY TEST      | After test meet<br>Item 9 and 10      | 40 $\pm 2$ $^{\circ}\text{C}$               | 90-95 %R. H | 24 Hours |

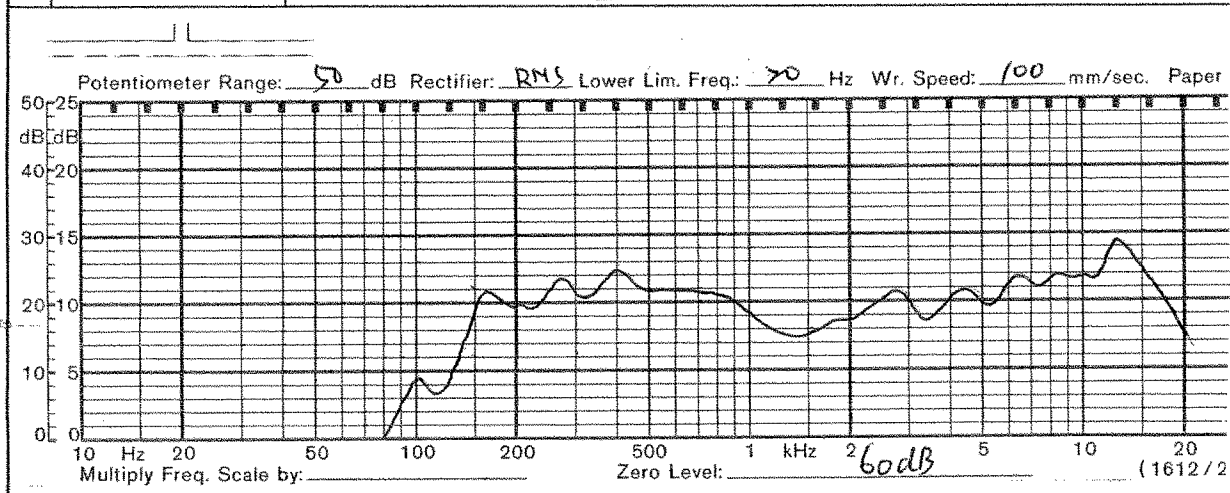

|            |            |          |        |
|------------|------------|----------|--------|
| PART NO.   | CMS0361KLX | UNITS:   | mm     |
| TOLERANCE: | $\pm 1.5$  | PAGE NO: | 1 of 2 |

