
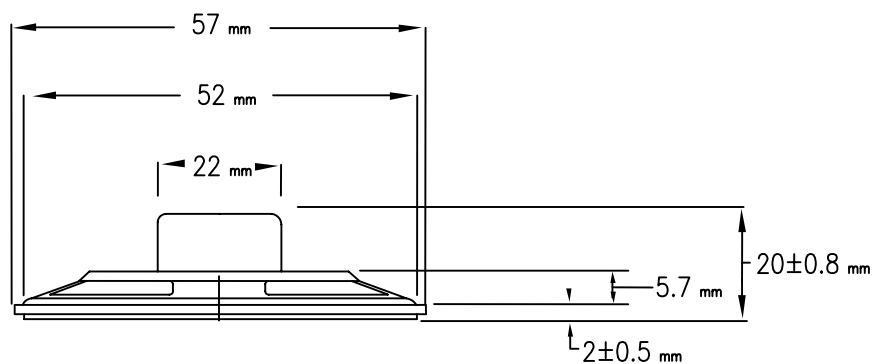


Specifications

1	Part No.	GA0576M			
2	Nominal Size	57 mm.	2 "	inch	
3	Impedance	8 Ω $\pm$ 15%	at	800 Hz.	1 V.
4	Resonance	500 Hz. $\pm$ 100 Hz.		F0 Hz.	1 V.
5	S.P. Level	80 dB/w $\pm$ 3 dB	0.25 w. 50 cm. average at 1K, 1.4K, 1.7K, 2K Hz.		
6	Response	fo Hz. $\sim$ 12K Hz. MAX 10dB			
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	0.25 w.	Handling Capacity	0.5 w.
9	Operation	Must be normal at program source 0.25 w.			
10	Buzz, Rattle, etc.	Must be normal at sine wave 1.41 v.			
11	Flux Density	Gauss $\pm$ 10%			
12	Total Flux	Max well min			
13	Magnet	Size	13 x 10 mm	gr	oz
14	Total Weight	gr oz			
15	Load Test	After test meet item 9 and 10	White noise	0.25 W.	5 Hours
16	Distortion	% MAX Hz W.			
17	Heat Test	After test meet item 9 and 10	70 $\pm$ 2 $\pm^{\circ}$ C	20-50 %R.H.	5 Hours
18	Humidity Test	After test meet item 9 and 10	40 $\pm$ 2 $\pm^{\circ}$ C	90-95 %R.H.	5 Hours

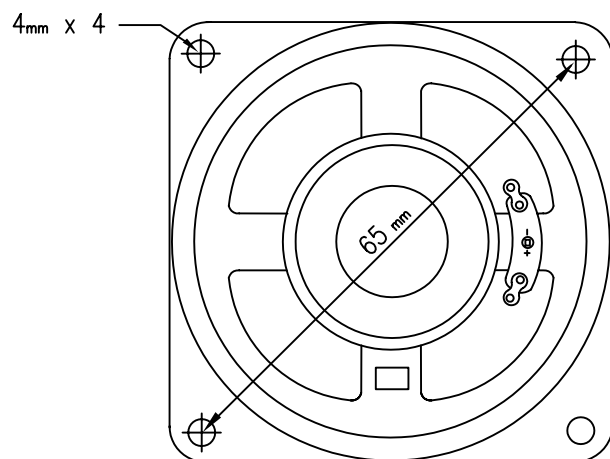

CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

PART NO.

GA0576M

UNITS:

mm

DRAWN BY:

Page No.

2 of 2