





CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

Specifications

1	Part No.	GA0701M			
2	Nominal Size	70 mm.	2 3/4"	inch	
3	Impedance	8 Ω $\pm$ 15%	at 800 Hz.	1 V.	
4	Resonance	330 Hz. $\pm$ 66 Hz.	FO Hz.	1 V.	
5	S.P. Level	91 dB/w $\pm$ 3 dB	0.5 w. 50 cm. average at		
6	Response	fo Hz. $\sim$ 9K Hz. MAX 10dB	700, 1K, 1.2K, 1.4K Hz.		
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input 0.5 w.	Handling Capacity	1 w.	
9	Operation	Must be normal at program source 0.5 w.			
10	Buzz, Rattle, etc.	Must be normal at sine wave 2 v.			
11	Flux Density	Gauss $\pm$ 10%			
12	Total Flux	Max well min			
13	Magnet	Size 13 x 10 mm	gr	0.35 oz	
14	Total Weight	gr oz			
15	Load Test	After test meet item 9 and 10	White noise 0.5 W.	48 Hours	
16	Distortion	% MAX Hz W.			
17	Heat Test	After test meet item 9 and 10	70 $\pm$ 2 $\pm^{\circ}$ C 20-50 %R.H.	48 Hours	
18	Humidity Test	After test meet item 9 and 10	40 $\pm$ 2 $\pm^{\circ}$ C 90-95 %R.H.	48 Hours	

PART NO.	GA0701M	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

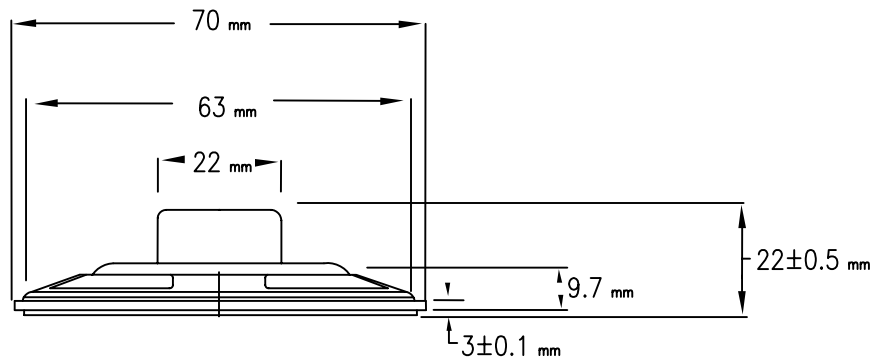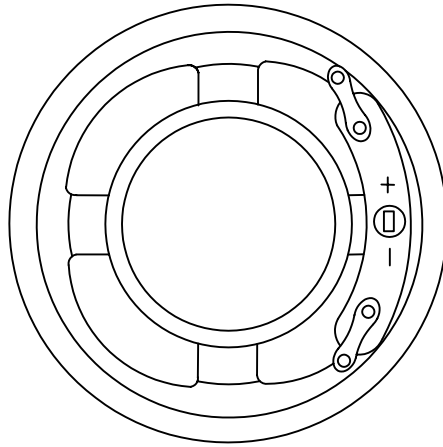

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:

PART NO.

GA0701M

UNITS:

mm

DRAWN BY:

Page No.

2 of 2