




Specifications

Nominal Size	16 x 35 mm		
Impedance	8 Ohm $\pm$ 15%	at	1.5 K Hz 1 V
Resonant frequency	650 Hz $\pm$ 130 Hz	at	1 V
Sound pressure level	83 dB/w $\pm$ 3 dB 1.0 w 50 cm avg at 0.8K, 1K, 1.2K, 1.5K Hz		
Response	FO Hz ~ 20K Hz max 10 dB		
Input power	Nominal 1 W	Handling capacity	1.5 W
Operation	must be normal at program source 1 W		
Buzz, rattle, etc.	must be normal at sine wave 2.9 V		
Magnet	Size: 7.9 x 1.3 mm		
Load test	White noise 1 W	for	24 hours
Heat test	60 $\pm$ 2° C	20-50% R.H.	24 hours
Humidity test	40 $\pm$ 2° C	90-95% R.H.	24 hours
RoHS compliant	yes		

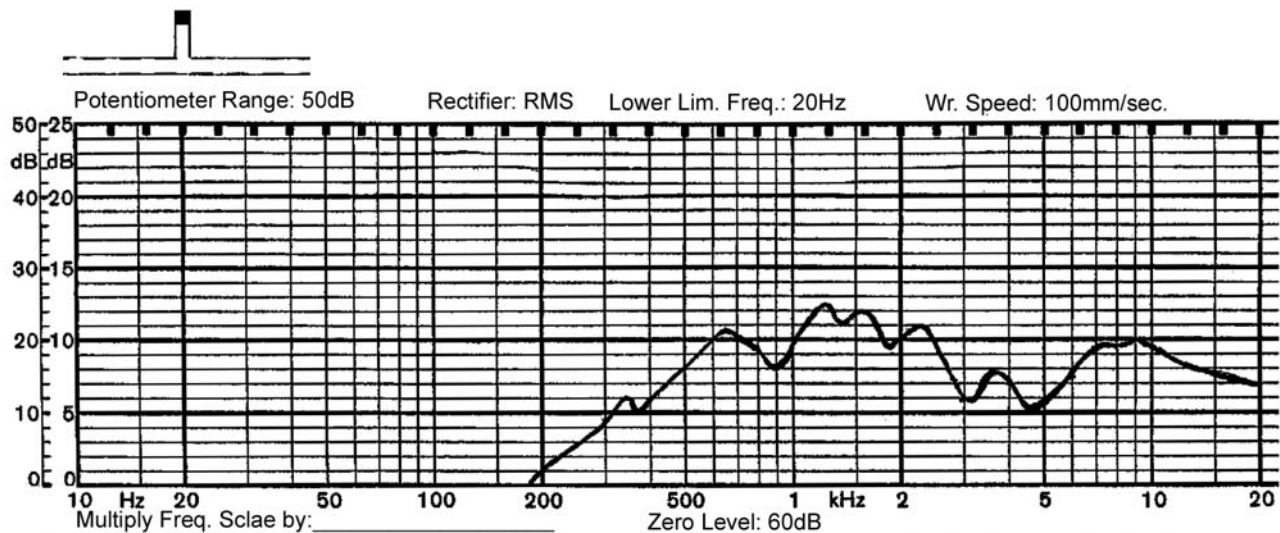

Mechanical Drawing