





9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

Specifications

1	Part No.	GC0351P-1			
2	Nominal Size	16 x 35 mm.		inch	
3	Impedance	4 $\Omega \pm 15\%$	at	1.2K Hz.	2 V.
4	Resonance	630 Hz. $\pm$ 126 Hz.	F0 Hz.	2 V.	
5	S.P. Level	82 dB $\pm$ 3 dB	1 w.	50 (100) cm.	average at
6	Response	fo Hz. $\sim$ 13K Hz. MAX 10dB	600, 800, 1K, 1.2K Hz.		
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	1 w.	Handling Capacity	2 w.
9	Operation	Must be normal at program source			1 w.
10	Buzz, Rattle, etc.	Must be normal at sine wave			2 v.
11	Flux Density	Gauss $\pm 10\%$			
12	Total Flux	Max well min			
13	Magnet	Size	8.1 x 1.4 mm	gr	oz
14	Total Weight				gr oz
15	Load Test	After test meet item 9 and 10	White noise	1 W.	24 Hours
16	Distortion	% MAX		Hz	W.
17	Heat Test	After test meet item 9 and 10	65 $\pm$ 2 $\pm^\circ\text{C}$	20-50 %R.H.	24 Hours
18	Humidity Test	After test meet item 9 and 10	40 $\pm$ 2 $\pm^\circ\text{C}$	90-95 %R.H.	24 Hours

PART NO.	GC0351P-1	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

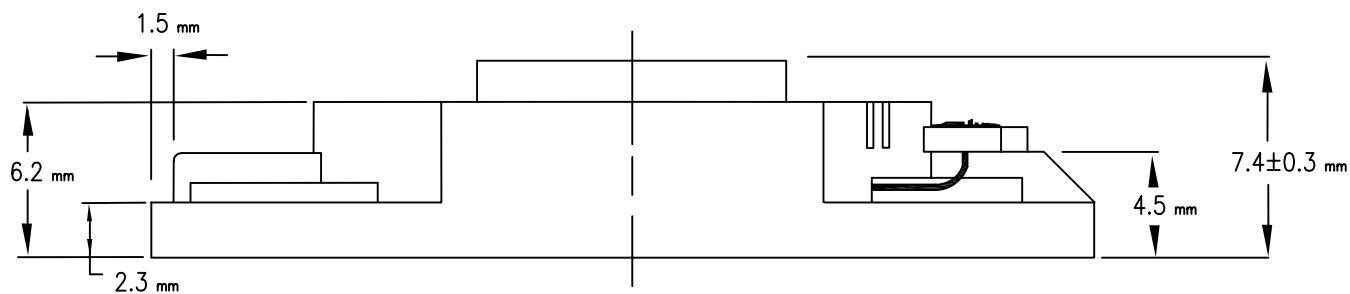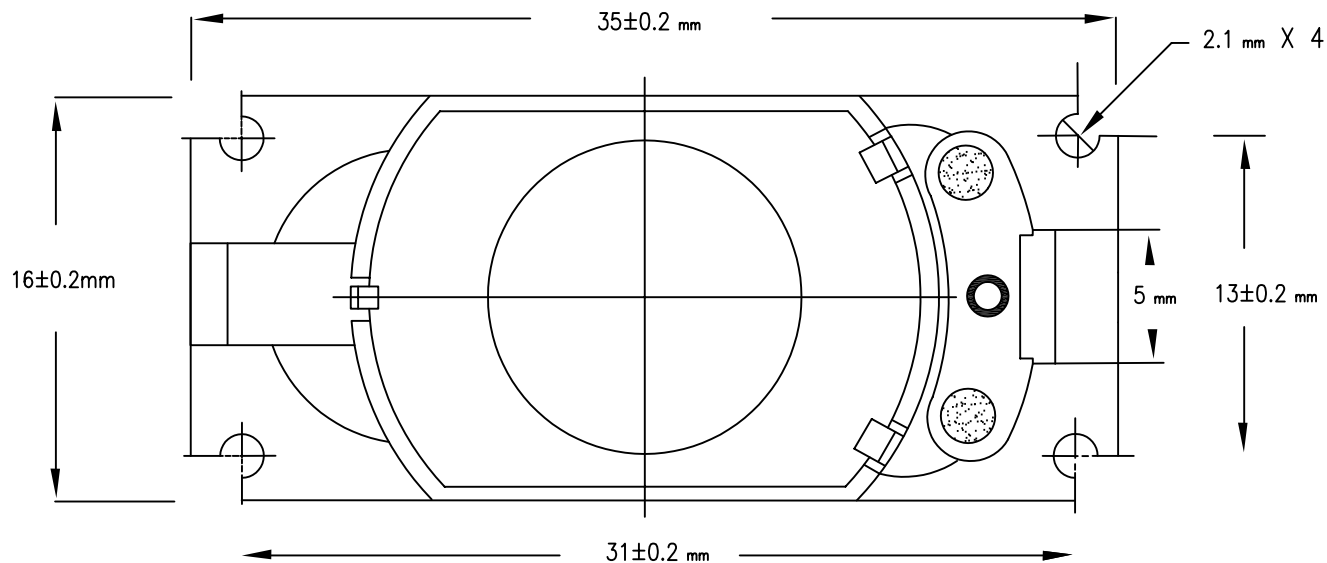

CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

PART NO.

GC0351P-1

UNITS:

mm

DRAWN BY:

Page No.

2 of 2