
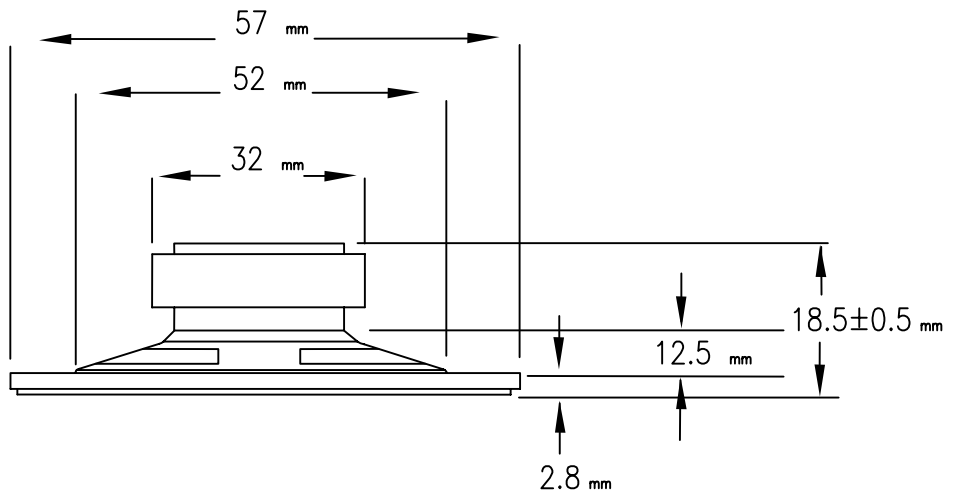


# Specifications

|    |                    |                                          |                                                    |          |
|----|--------------------|------------------------------------------|----------------------------------------------------|----------|
| 1  | Part No.           | GF0571M                                  |                                                    |          |
| 2  | Nominal Size       | 57 mm.                                   | 2 - 1/4"                                           | inch     |
| 3  | Impedance          | 8 $\Omega$ $\pm$ 15%                     | at 800 Hz.                                         | 1 V.     |
| 4  | Resonance          | 480 Hz. $\pm$ 96 Hz.                     | FO Hz.                                             | 1 V.     |
| 5  | S.P. Level         | 86 dB/W 3 dB                             | 0.25 w. 50 cm. average at<br>1K, 1.4K, 1.7, 2K Hz. |          |
| 6  | Response           | fo Hz. $\sim$ 14K Hz. MAX 10dB           |                                                    |          |
| 7  | Crossover Freq.    | Hz. Hz.                                  | dB/OCT                                             | Net work |
| 8  | Input Power        | Nominal Input 0.25 w.                    | Handling Capacity                                  | 0.5 w.   |
| 9  | Operation          | Must be normal at program source 0.25 w. |                                                    |          |
| 10 | Buzz, Rattle, etc. | Must be normal at sine wave 1.41 v.      |                                                    |          |
| 11 | Flux Density       | Gauss $\pm$ 10%                          |                                                    |          |
| 12 | Total Flux         | Max well min                             |                                                    |          |
| 13 | Magnet             | Size 32 x 18 x 6 mm                      | gr                                                 | oz       |
| 14 | Total Weight       | gr oz                                    |                                                    |          |
| 15 | Load Test          | After test meet item 9 and 10            | White noise 0.25 W.                                | 5 Hours  |
| 16 | Distortion         | % MAX Hz W.                              |                                                    |          |
| 17 | Heat Test          | After test meet item 9 and 10            | 65 $\pm$ 2 $\pm^{\circ}$ C 20-50 %R.H.             | 5 Hours  |
| 18 | Humidity Test      | After test meet item 9 and 10            | 40 $\pm$ 2 $\pm^{\circ}$ C 90-95 %R.H.             | 5 Hours  |

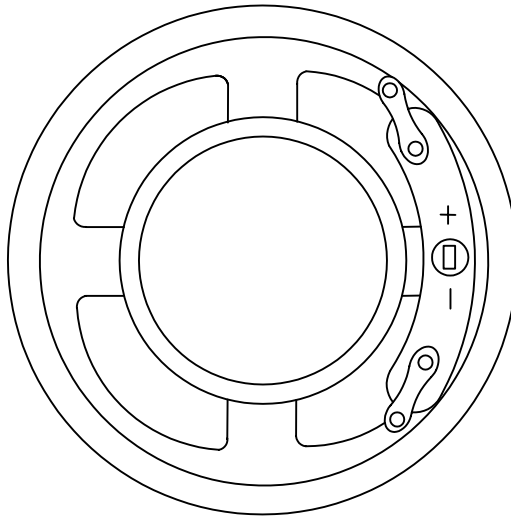

**CUI INC**

9615 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-275-4899  
 Fax: (503) 372-1266  
 Website: [www.cui.com](http://www.cui.com)

TITLE:

PART NO.

GF0571M

UNITS:

mm

DRAWN BY:

Page No.

2 of 2