




9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

Specifications

1	Part No.	GF0668			
2	Nominal Size	66 mm.	2 - 1/2	inch	
3	Impedance	8Ω ± 15%	at	800 Hz.	1 V.
4	Resonance	300 Hz.± 60 Hz.	FO	Hz.	1 V.
5	S.P. Level	90 dB/W 3 dB	1 w.	50 cm.	average at
6	Response	fo Hz.~ 20K Hz. MAX 10dB	500, 800, 1K, 1.2K	Hz.	
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	3 w.	Handling Capacity	5 w.
9	Operation	Must be normal at program source 3 w.			
10	Buzz, Rattle, etc.	Must be normal at sine wave 4.89 v.			
11	Flux Density	Gauss ± 10%			
12	Total Flux	Max well min			
13	Magnet	Size	45 x 22 x 8 mm	gr	oz
14	Total Weight	gr oz			
15	Load Test	After test meet item 9 and 10	White noise	3 W.	48 Hours
16	Distortion	% MAX Hz W.			
17	Heat Test	After test meet item 9 and 10	70±2 ±°C	20-50 %R.H.	48 Hours
18	Humidity Test	After test meet item 9 and 10	40±2 ±°C	90-95 %R.H.	48 Hours

PART NO.	GF0668	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

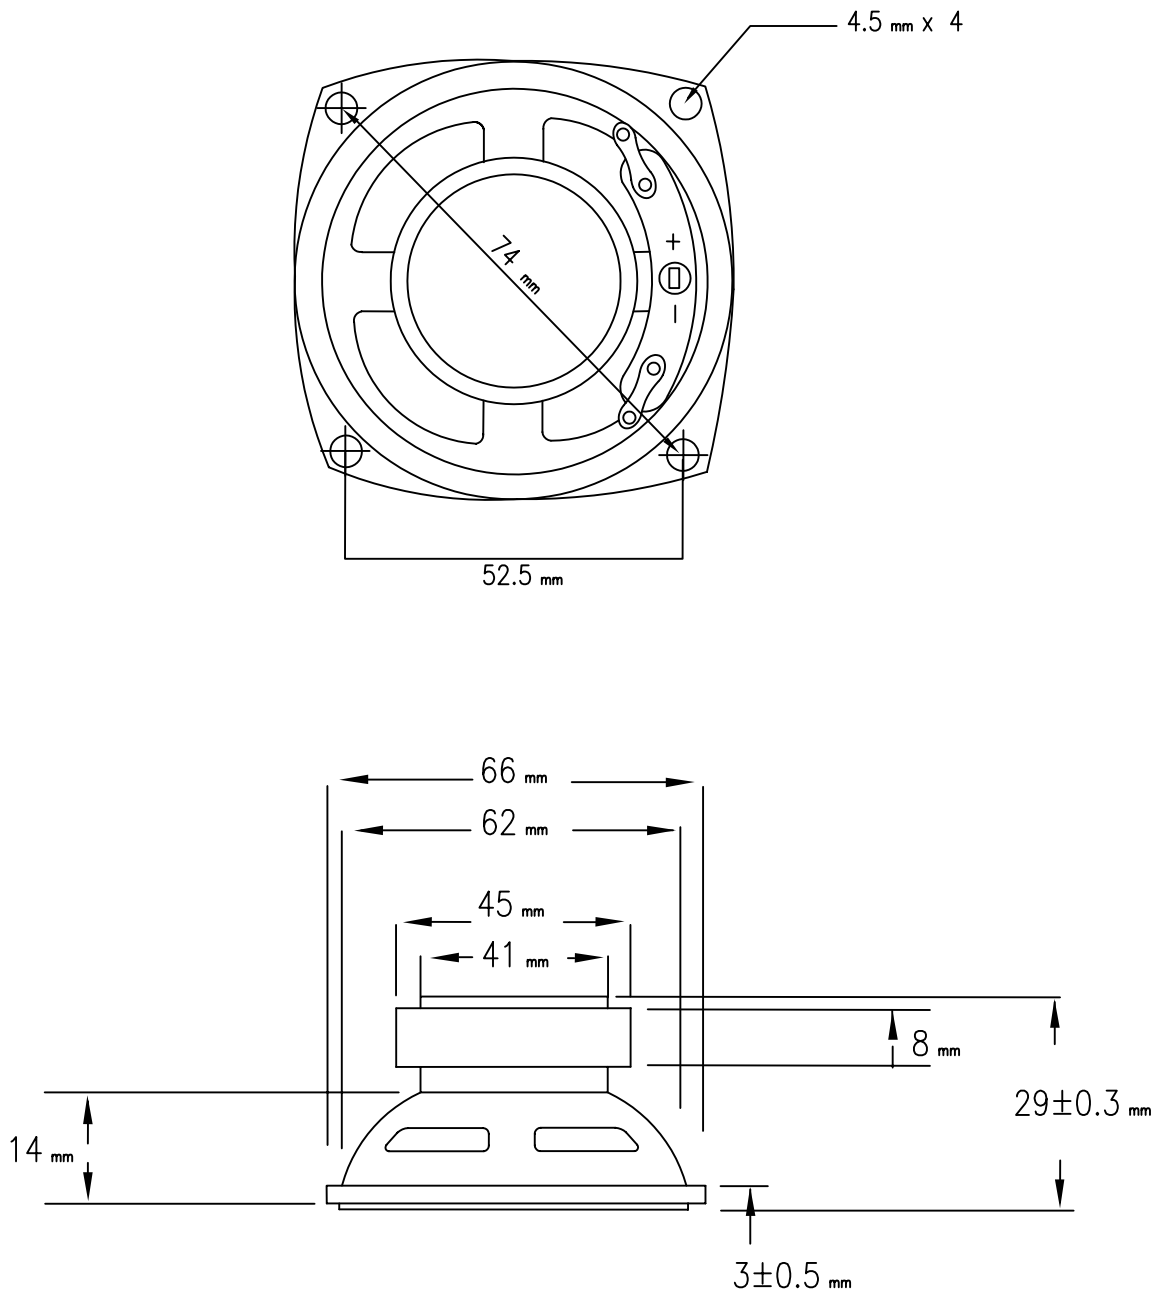

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:

PART NO.

GF0668

UNITS:

mm

DRAWN BY:

Page No.

2 of 2