
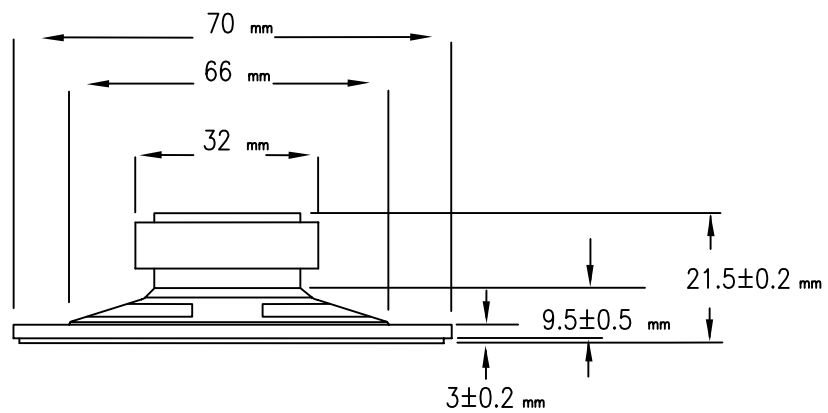


Specifications

1	Part No.	GF0701			
2	Nominal Size	70 mm.		2 – 3/4” inch	
3	Impedance	8 Ω ± 15%		at	800 Hz. 1 V.
4	Resonance	310 Hz.± 62 Hz.		FO Hz. 1 V.	
5	S.P. Level	91 dB/W 3 dB		0.5 w. 50 cm. average at 600, 800, 1K, 1.2K Hz.	
6	Response	fo Hz.~ 4K Hz. MAX 10dB			
7	Crossover Freq.	Hz. Hz.		dB/OCT Net work	
8	Input Power	Nominal Input 0.5 w. Handling Capacity 1 w.			
9	Operation	Must be normal at program source 0.5 w.			
10	Buzz, Rattle, etc.	Must be normal at sine wave 2 v.			
11	Flux Density	Gauss ± 10%			
12	Total Flux	Max well min			
13	Magnet	Size 32 x 18 x 6 mm		gr	oz
14	Total Weight	gr oz			
15	Load Test	After test meet item 9 and 10		White noise 0.5 W.	48 Hours
16	Distortion	% MAX		Hz	W.
17	Heat Test	After test meet item 9 and 10		70±2 ±°C 20–50 %R.H.	48 Hours
18	Humidity Test	After test meet item 9 and 10		40±2 ±°C 90–95 %R.H.	48 Hours

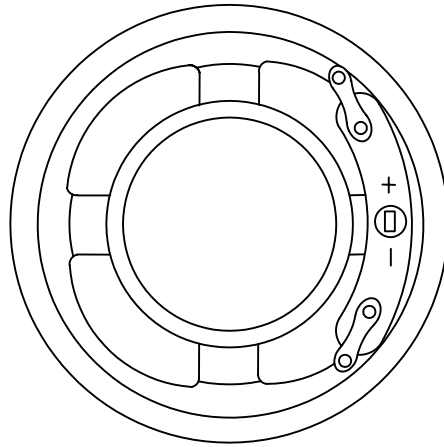

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:

PART NO.

GF0701

UNITS:

mm

DRAWN BY:

Page No.

2 of 2