


**MODEL:** CMT-2512-1285T | **DESCRIPTION:** MAGNETIC BUZZER TRANSDUCER**FEATURES**

- through hole
- SPL 85 dB
- magnetic
- externally driven


**SPECIFICATIONS**

| parameter             | conditions/description                                                            | min | typ   | max  | units              |
|-----------------------|-----------------------------------------------------------------------------------|-----|-------|------|--------------------|
| rated voltage         |  |     | 12.0  |      | Vo-p               |
| operating voltage     |                                                                                   | 8.0 |       | 14.0 | Vo-p               |
| current consumption   | at rated voltage, 1,000 Hz, 1/2 duty square wave                                  |     |       | 100  | mA                 |
| rated frequency       |                                                                                   |     | 1,000 |      | Hz                 |
| sound pressure level  | at 10 cm, rated voltage, 1,000 Hz, 1/2 duty square wave                           | 85  |       |      | dB                 |
| coil resistance       |                                                                                   | 72  | 80    | 88   | $\Omega$           |
| dimensions            | $\varnothing 25.0 \times 12.5$                                                    |     |       |      | mm                 |
| weight                |                                                                                   |     | 10    |      | g                  |
| material              | NORYL                                                                             |     |       |      |                    |
| terminal              | pins (red copper with tin plating)                                                |     |       |      |                    |
| operating temperature |                                                                                   | -30 |       | 70   | $^{\circ}\text{C}$ |
| storage temperature   |                                                                                   | -40 |       | 85   | $^{\circ}\text{C}$ |
| RoHS                  | yes                                                                               |     |       |      |                    |

Notes: 1. All specifications measured at  $25 \pm 3^{\circ}\text{C}$ , humidity at 60~70%, under 86~106 kPa pressure, unless otherwise noted.


**SOLDERABILITY**

| parameter      | conditions/description                 | min | typ | max | units              |
|----------------|----------------------------------------|-----|-----|-----|--------------------|
| wave soldering | see recommended wave soldering profile |     |     | 250 | $^{\circ}\text{C}$ |

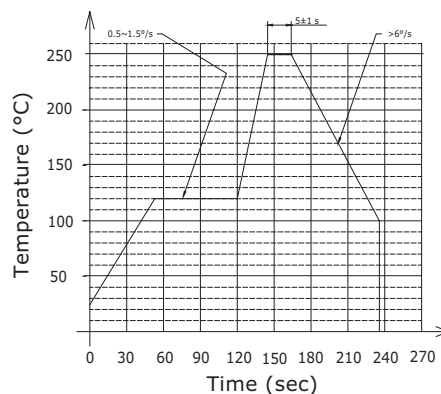


## MECHANICAL DRAWING

units: mm  
tolerance:  $\pm 0.5$  mm

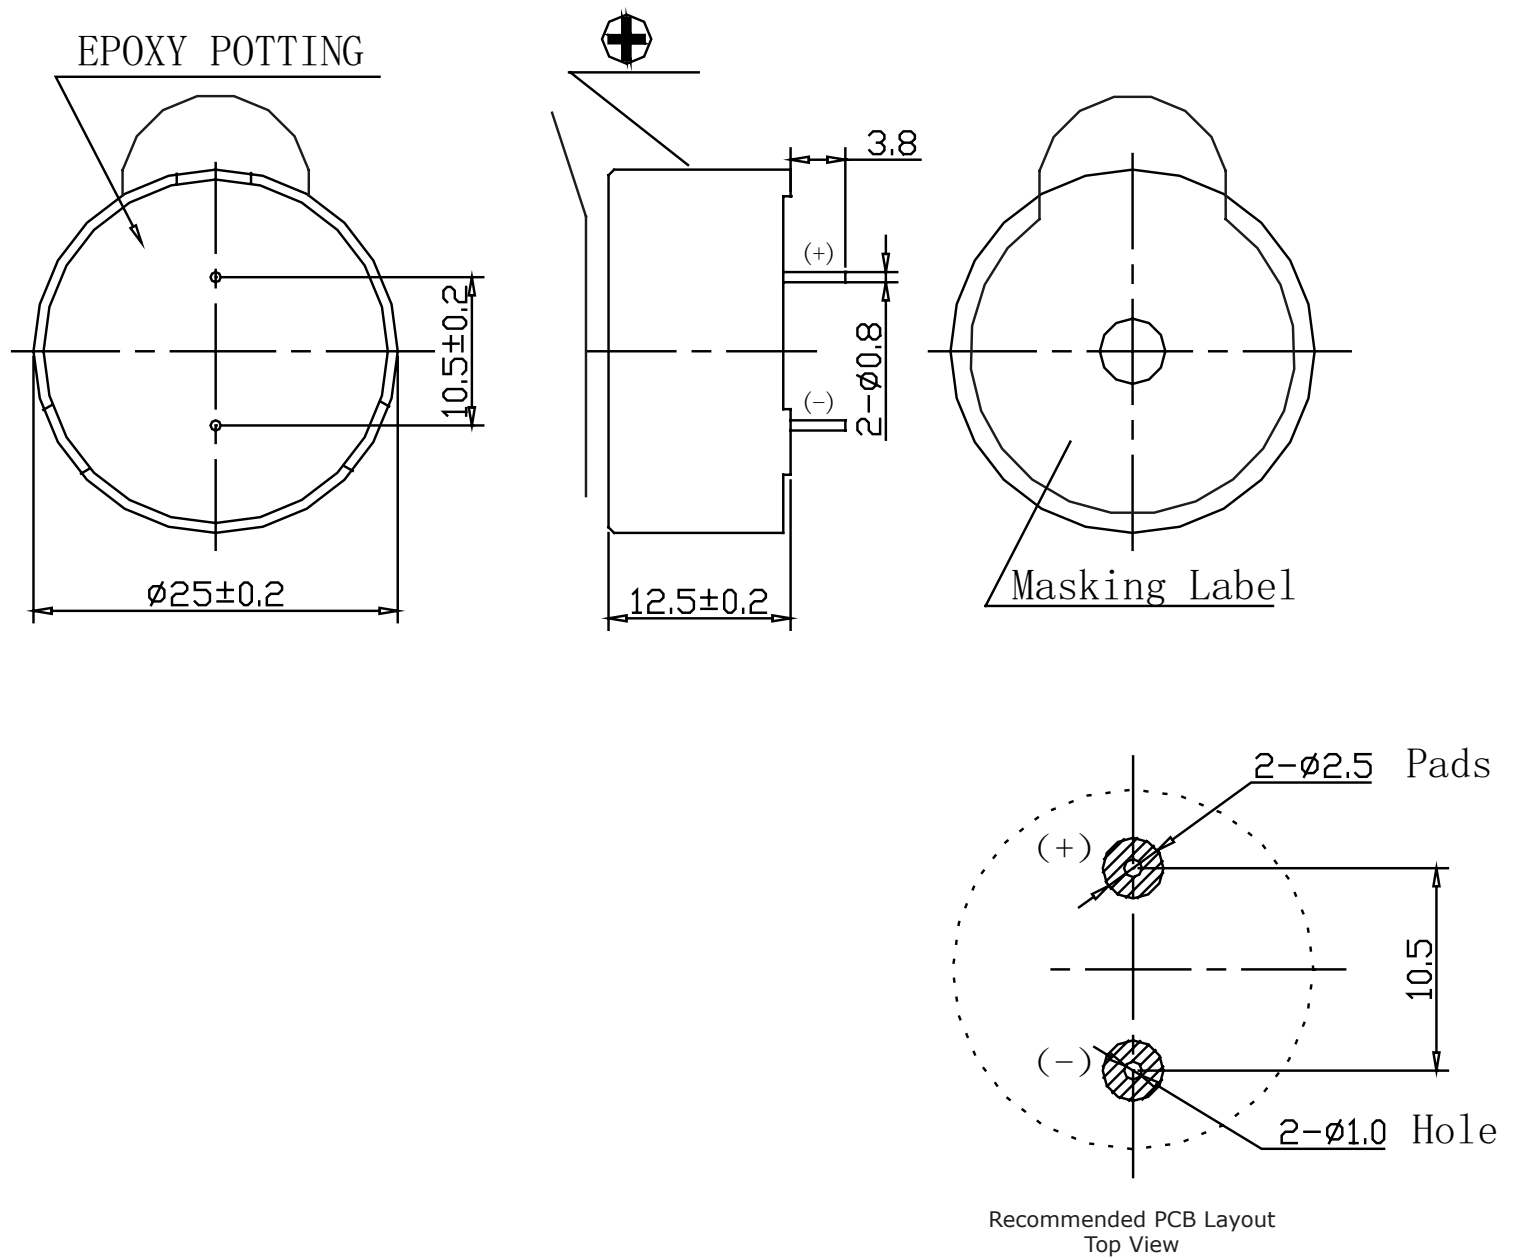

## FREQUENCY RESPONSE CURVE

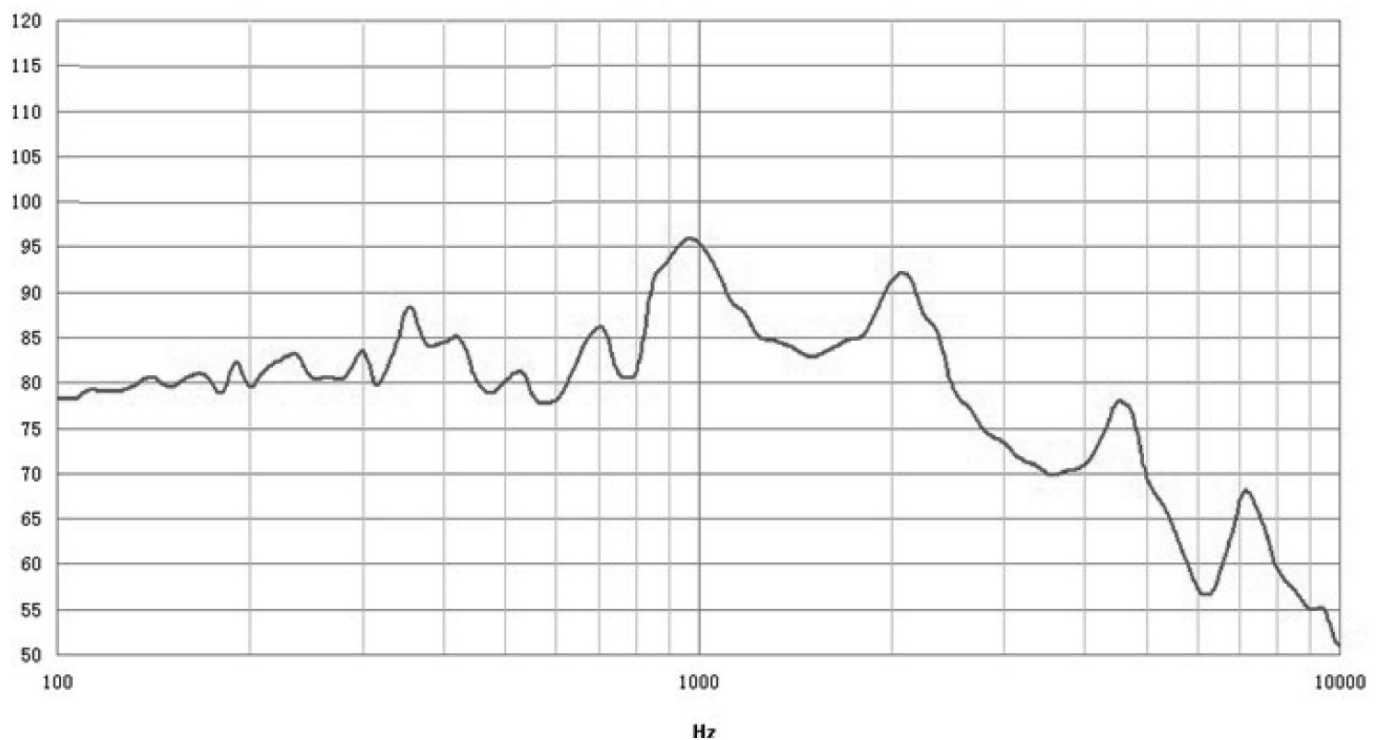


## APPLICATION CIRCUIT



## PACKAGING

units: mm

Carton Size: 515 x 330 x 335 mm  
Carton QTY: 2,000 pcs per carton

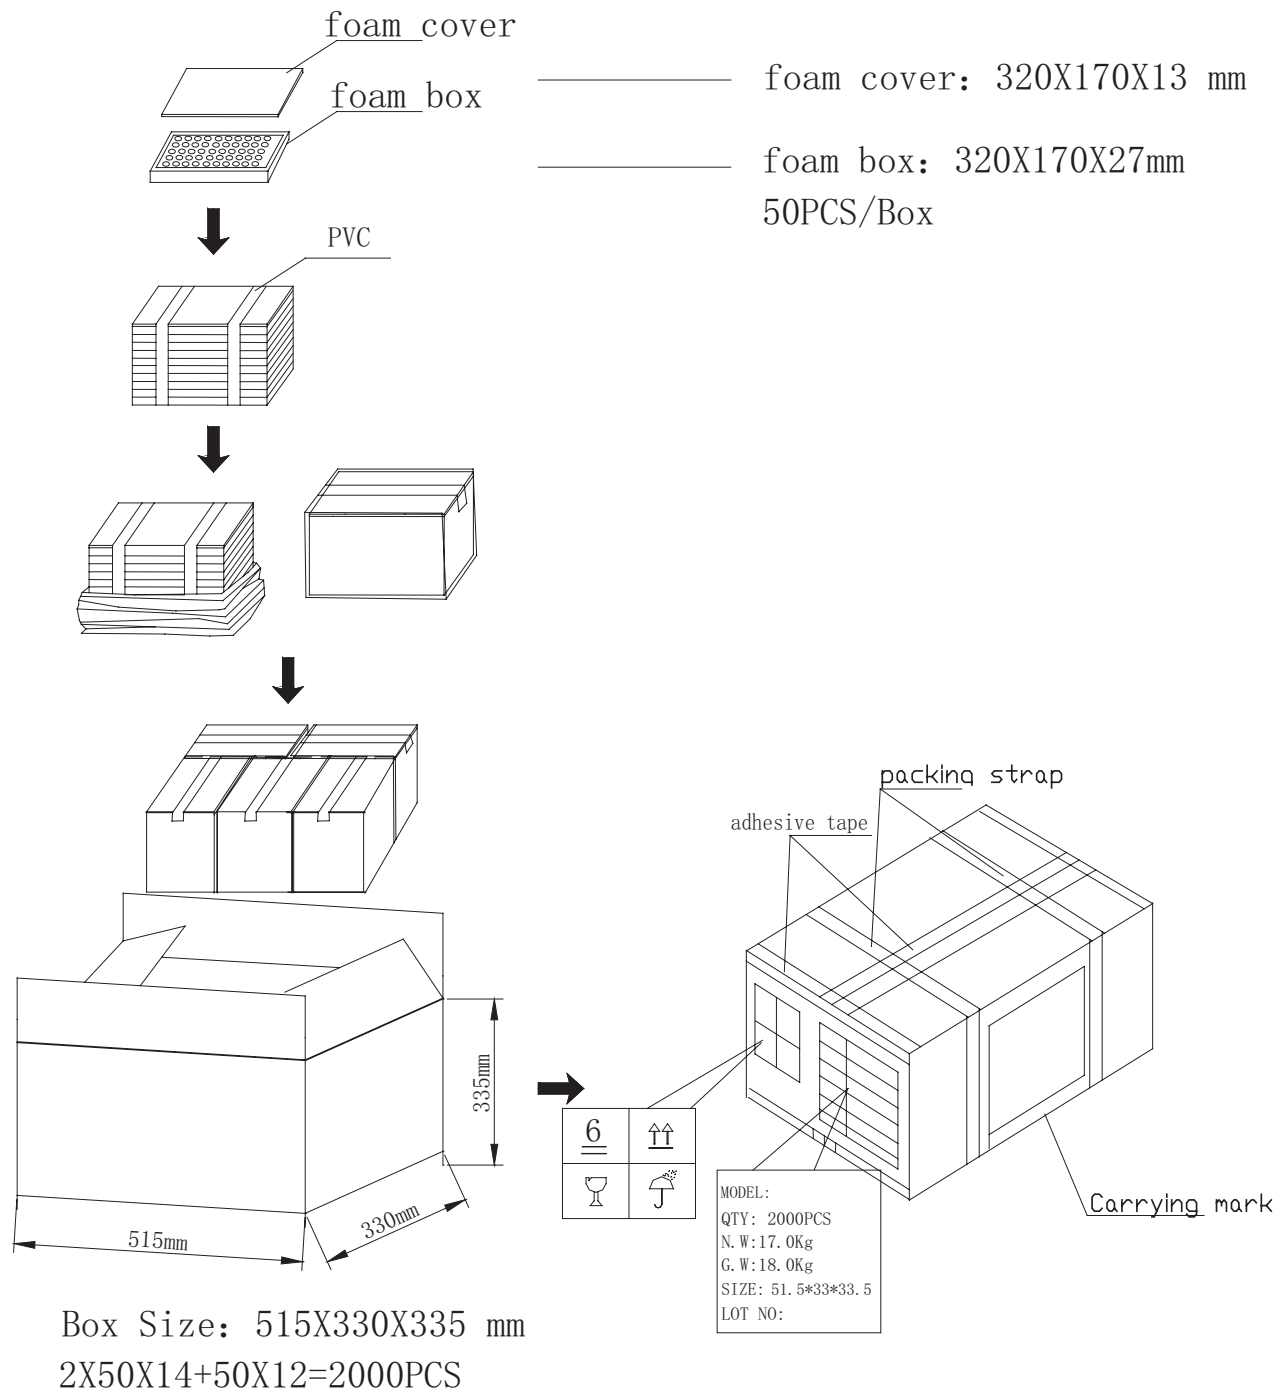

## REVISION HISTORY

| rev. | description     | date       |
|------|-----------------|------------|
| 1.0  | initial release | 07/12/2019 |
| 1.01 | brand update    | 12/18/2019 |

The revision history provided is for informational purposes only and is believed to be accurate.

---

# CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.