

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

E

D

C

B


A

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING

Dwg. No.

GRS-4011C-XXXX



OPTIONAL INSULATING BARRIER



MOUNTING PANEL THICKNESS


Standard—.050" (1.27mm) to .150" (3.81mm).
Optional Mounting Claws for Custom Panel thickness are available.

PANEL PIERCING
POLARIZED

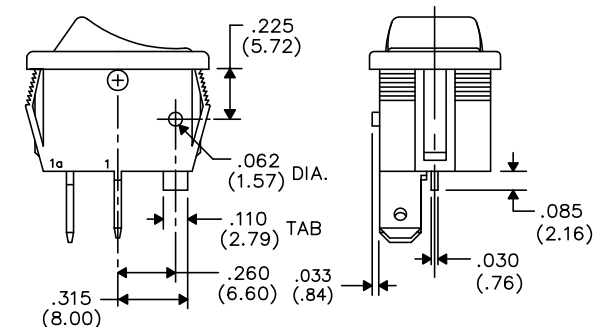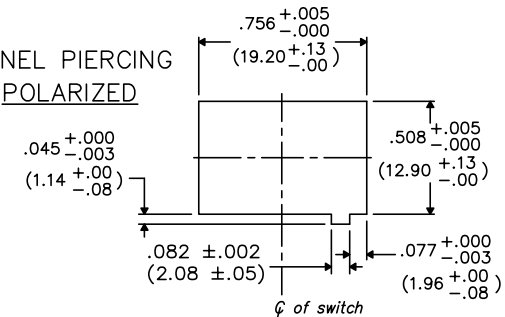

TAB AND POLARIZATION OPTIONS

PANEL PIERCING

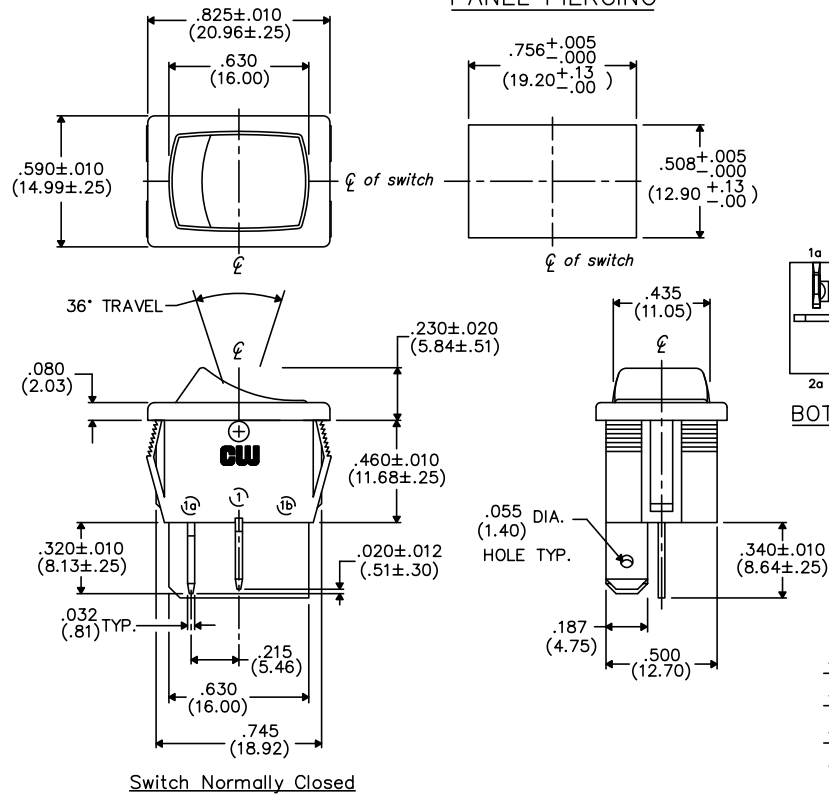

BOTTOM VIEW

TERMINAL OPTIONS:

.187" (4.75mm) x .032" (.81mm) Solderless
.110" (2.79mm) x .032" (.81mm) Solderless
.187" (4.75mm) x .020" (.51mm) Solderless
.110" (2.79mm) wide with .048" (1.22mm)
x .237" (6.02mm) Slot for Soldering

B-FORMAT 2002

REVISIONS

PDF FILE MADE

CW INDUSTRIES Southampton, Pa. 18966	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
2 Place Decimal $\pm .010$	METRIC
3 Place Decimal $\pm .005$	1 Place Dec. $\pm .25$ mm
Angles $\pm 1^\circ$	2 Place Dec. $\pm .13$ mm
Made for: CW IND.	Division: SWITCH
Drawn by: DGW 10-28-2010	Dwg. No. GRS-4011C-XXXX
Checked by:	
Approval:	

Title: ROCKER
SWITCH
ASSEMBLY
S.P./S.T. MOM.