
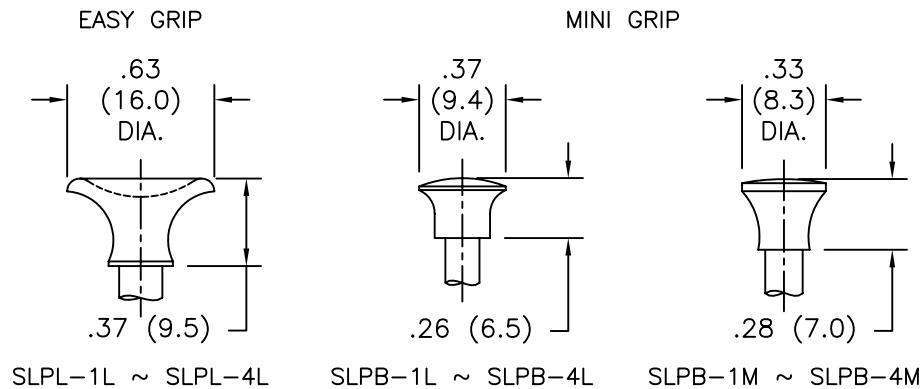


GROMMET NO.	GROMMET DASH NO.	"W" ±.012 (±0.3)	"H" ±.008 (±0.2)	"L" REF.	REMOVABLE PANEL THICKNESS "T" MAX.	TOTAL PANEL THICKNESS "T1" MIN.-MAX.	REMOVABLE PANEL HOLE DIA. RANGE "DR"	FIXED PANEL HOLE DIA. RANGE "DF"	MATING PLUNGER NO.	ALTERNATE MATING PLUNGER NO.	PLUNGER DASH NO.
SLG	SL	.425 (10.8)	.079 (2.0)	.339 (8.6)	.043 (1.1)	.059-.145 (1.5-3.7)	.295-.303 (7.5-7.7)	.315-.323 (8.0-8.2)	SLPL	SLPB	1L
	1L			.354 (9.0)	.063 (1.6)	.079-.165 (2.0-4.2)					2L
	2L			.394 (10.0)	.098 (2.5)	.118-.205 (3.0-5.2)					3L
	3L			.461 (11.7)	.161 (4.1)	.181-.272 (4.6-6.9)					4L
	4L	.335 (8.5)	.071 (1.8)	.508 (12.9)	.209 (5.3)	.228-.315 (5.8-8.0)	.234-.240 (5.95-6.1)	.250-.256 (6.35-6.5)	SLPB	----	1M
	1M			.315 (8.0)	.043 (1.1)	.059-.146 (1.5-3.7)					2M
	2M			.335 (8.5)	.063 (1.6)	.079-.165 (2.0-4.2)					3M
	3M			.374 (9.5)	.098 (2.5)	.118-.205 (3.0-5.2)					4M
	4M			.433 (11.0)	.161 (4.1)	.181-.272 (4.6-6.9)					

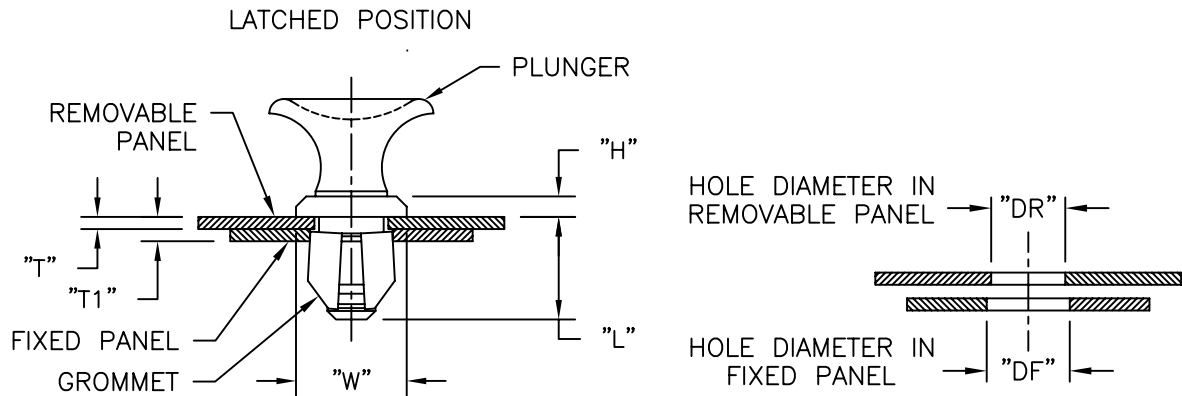

NOTES:

1. PLUNGER MATERIAL: NYLON 6, (RMS-120)
2. GROMMET MATERIAL: POLYCARBONATE (RMS-72)
3. COLOR: BLACK OR WHITE; ADD SUFFIX "B" OR "W" TO PART NUMBER.

G	FIXED TYPO IN PLUNGER HEAD STYLES' LABELS	R.G 04/25/02
F	REMOVED PART NUMBERS SLPL-SL & SLPB-SL	R.G 04/23/02
E	ADDED SLG-SL, 3L, 4L, 1M, 4M, SLPL-SL, 3L, 4L, SLPB-SL, -2L, 3L, 4L, 1M 4M, RMS 120 WAS 62.	R.G 01/25/02
—	SEE ENGINEERING FOR REV. A THRU D	R.G 01/25/02
R E V	DESCRIPTION	ENGR DATE

TITLE: S N A P L A T C H



TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # SL MAT'L: SEE NOTES RE: RICHCO, INC.	DWN: P.B. DT: 09-06-94	APP: DT:	FINAL	PART # SEE TABLE	PRINT TYPE CA
--	---	---------------------------	-------------	-------	---------------------	---------------------

RICHCO INC.
PO BOX 804238, CHICAGO, 60680
(773) 539-4060