SHEET 1 OF 1

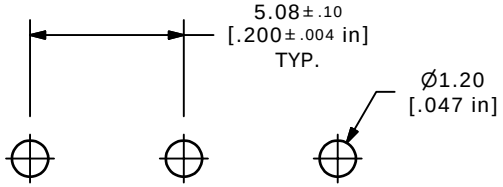

P.C. MOUNTING

▲ O.P. (MM)	P.T. (MM)
5.5 ± .5	0.5 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

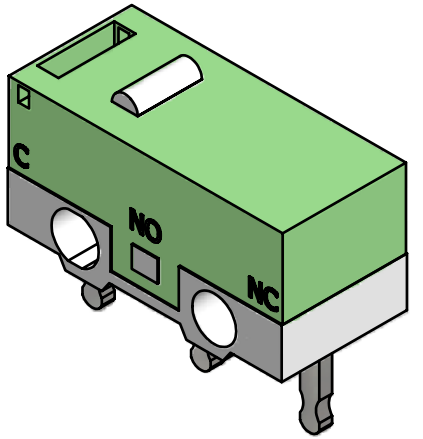

ISOMETRIC

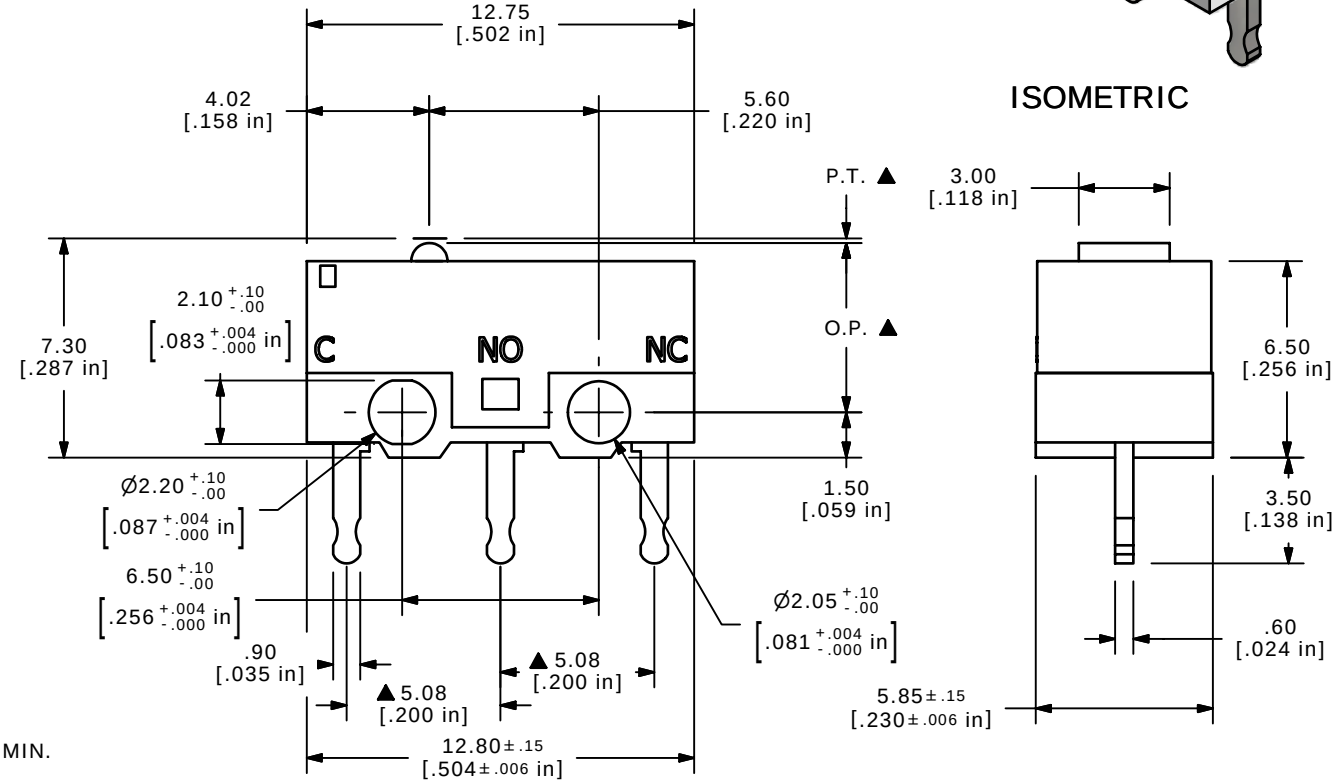

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
▲3. RATING: 1A @125VAC UL, CSA APPROVED
▲4. OPERATING FORCE: 125± 25 GRAMS
5. OPERATING TEMP: -25˚C TO 85˚C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
8. DIELECTRIC STRENGTH: 1000VAC-MIN.
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT
11. TERM NOS. FOR REFERANCE ONLY
12. CONTACT MATERIAL: SILVER

REV	PCR NO	DESCRIPTION	DATE	BY
B	17498	REVISED AND REDRAWN	7/23/07	BF

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH

TITLE DM0850100F125P1A

SCALE	DATE	DR	DWG	REV
4:1	7/23/2007	BF	P030035	B