



series R5 Switches

ILLUMINATED ROCKER SWITCHES

SPECIFICATIONS

Rating: 15A 250V, 20A 125VAC For Circuits A, B, C, E, F & H
 10A 250V, 15A 125V AC For Circuits D, G & I

Mechanical Life: ≥30,000 cycles

Electrical Life: ≥6,000 cycles

Contact Resistance: <20mΩ (Initial)

Insulation Resistance: >1,000MΩ @ 500V DC

Dielectric Strength: >1,500V AC 1 minute (Initial)

Safety Std. Approval: UL, CSA, VDE

MATERIALS

Body: Nylon 66 -- UL94 V-2

Rocker: Nylon 66, PC for illuminated versions -- UL94 V-2


Contact Surface: Coin silver, silver plated

Terminal: Silver plated brass

Illuminated Rockers: Neon lamp or Incandescent bulb


Operating Temperature: -20C to +55C

Storage Temperature: -30C to +80C

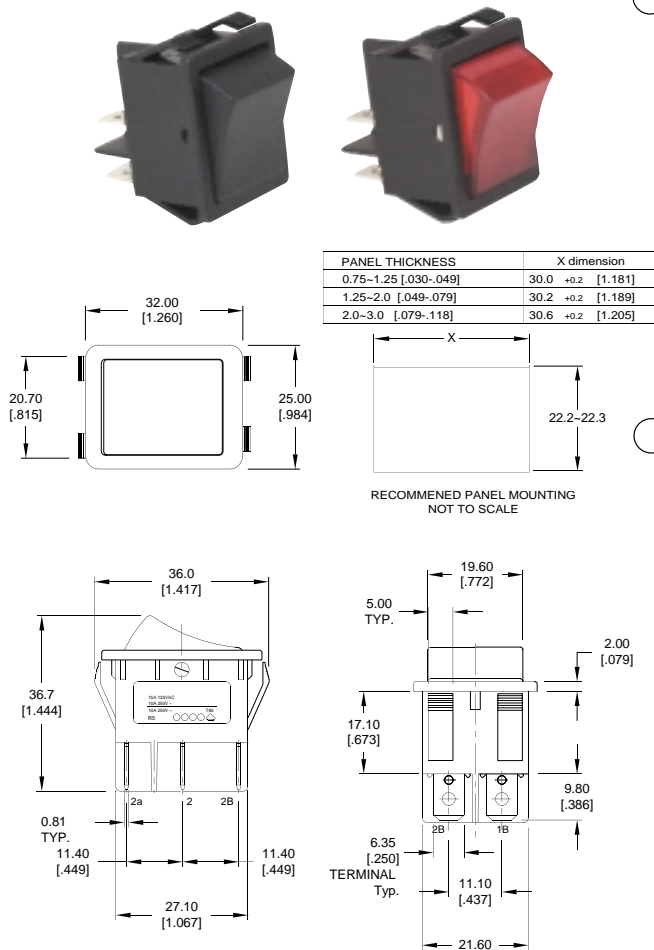

HOW TO ORDER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

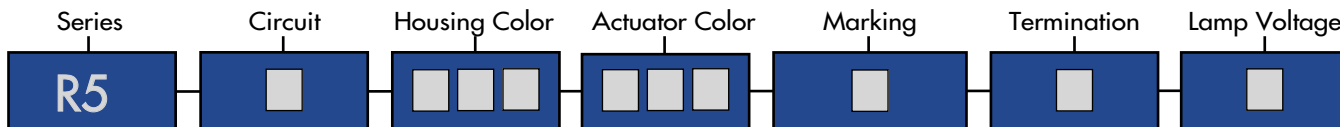

CIRCUIT CODE:
 A = DPST On-Off
 B = DPST On-Off Illuminated
 C = DPDT On-On
 D = DPDT On-Off-On
 E = DPDT On-(On)
 F = DPST Off-(On)
 G = DPDT (On)-On-(On)
 H = DPST On-(Off)
 I = DPDT On-Off-(On)
 () Denotes momentary function

See Below

BLK=Black
 WHT=White

BLK=Black
 WHT=White
 RED=Red
 *VEL=Yellow
 *GRN=Green
 GRY=Gray
 ORG=Orange
 *RED=Red

* Available for Illuminated Version Only

A
 B
 C
 E
 F
 G
 H
 I

F=Faston

0=No Lamp
 1=125V AC¹
 2=250V AC¹
 3=12V AC²
¹ Neon Bulb
² Incandescent Bulb



7153 Northland Dr., Brooklyn Park, MN 55428
 Phone: 763-504-3525 Fax: 763-531-8235

www.e-switch.com info@e-switch.com