
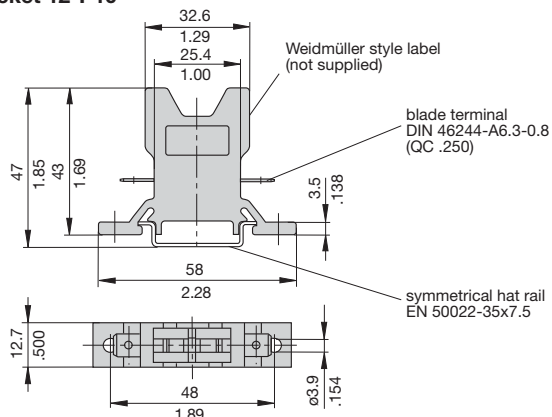
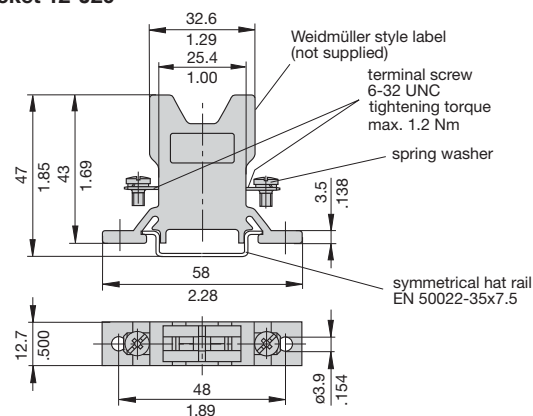


Ordering information Mounting socket 12


Socket 12-P10

**Socket 12-J20**

Socket 12-A10

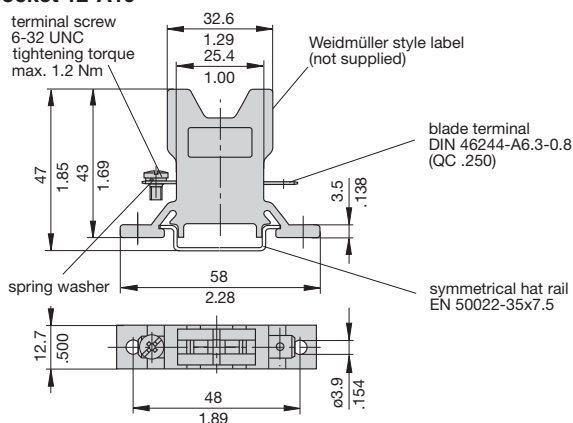

Dimensions for surface mounting

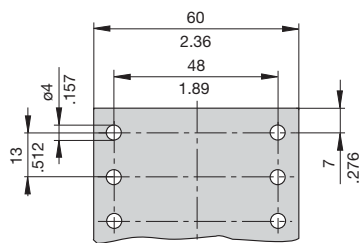

Other sockets available to special order
Labels: Weidmüller, D-33102 Paderborn


Type No.

12	Mounting socket	
	Terminal design	
P10	blade terminals A6.3-0.8 (QC .250)	
J20	screw terminals 6-32 UNC	
A10	1 blade terminal A6.3-0.8 (QC .250)/1 screw terminal 6-32 UNC	
	Version	
	(blank)	single socket
20		two-way
30		three-way
40		four-way
60		six-way
12 - P10 - 20	ordering example	


Accessories for mounting socket 12

Connector bus links -P10

X 210 588 01/ 2.5 mm² (AWG 16), brown (up to 13 A max. load)
X 210 588 02/ 2.5 mm² (AWG 14), black (up to 20 A max. load)
X 210 588 03/ 2.5 mm² (AWG 14), red (up to 20 A max. load)
X 210 588 04/ 2.5 mm² (AWG 14), blue (up to 20 A max. load)

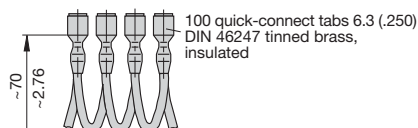

Bus bar (supplied as a complete package)
(up to 100 A max. load)
X 211 157 01 with terminal
X 211 157 02 without terminal

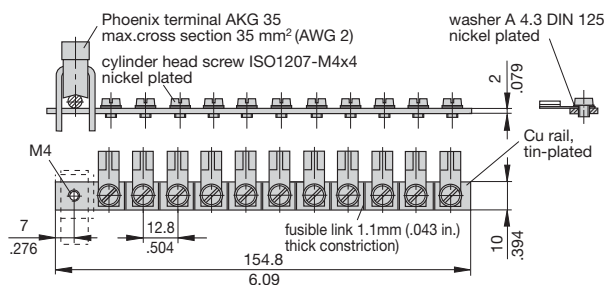

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.