


E-Z-MINI-HOOK TEST LEADS

MINI-HOOK TO .025" (.635mm) SQUARE SOCKET

Part Number	22AWG	Lead Length
203-6W -(color)	6"	15cm
203-12W -(color)	12"	30cm
203-18W -(color)	18"	45cm
203-24W -(color)	24"	60cm
203-36W -(color)	36"	90cm
203-48W -(color)	48"	120cm
203-60W -(color)	60"	150cm
203-WC -(color)	48"	Coil Cord

Part Number	28AWG	Lead Length
703-6W -(color)	6"	15cm
703-12W -(color)	12"	30cm
703-18W -(color)	18"	45cm
703-24W -(color)	24"	60cm
703-36W -(color)	36"	90cm
703-48W -(color)	48"	120cm
703-60W -(color)	60"	150cm

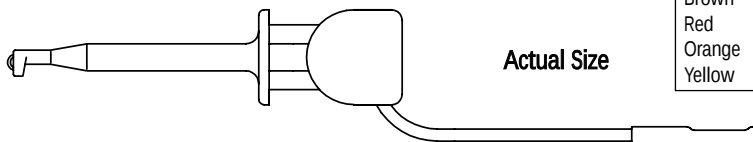

COLOR CHART	
Black	Green
Brown	Blue
Red	Violet
Orange	Gray
Yellow	White

MINI-HOOK: Gold-Plated BeCu Contact per MIL G45204. Sq. Hole Tip Nylon Body with removable Plunger for easy service. Stainless Steel Spring. Hook fits component leads to .040" (1.016mm) dia.

LEAD WIRE: 22AWG 65 x 40 Tinned Copper with extra flexible PVC Insulation.
24AWG 19 x 36 Tinned Copper with Teflon Insulation. Temperature to 200°C.
28AWG 19 x 40 Tinned Copper with extra flexible PVC Insulation.

COIL CORD: 22AWG 26 x 36 PVC Insulated. Urethane Jacket. 7" Coil Length. 6" Pigtailed. 48" Reach.

COLOR CHOICES

1. Single Color Unit: Add desired color to Part No. See color chart
2. Color Assortment (1 ea of 10 Colors): Add -S to Part Number. Example: 203-6W-S.
3. Multicolor Unit: See Kilo-Color Ordering Information on inside back cover.

RECTANGULAR HOLE TIP MODEL: Insert 2 after W in Part Number. See page


.025" (.635mm) SQUARE SOCKET: Brass Body. Gold-Plated BeCu Springs.
Heat Shrink Insulation. Crimp Assembly. See P/N 9205.

MINI-HOOK TO MINI-HOOK JUMPER (Illustration NOT to Scale)

Part Number	22AWG	Lead Length
204-6W -(color)	6"	15cm
204-12W -(color)	12"	30cm
204-18W -(color)	18"	45cm
204-24W -(color)	24"	60cm
204-36W -(color)	36"	90cm
204-48W -(color)	48"	120cm
204-60W -(color)	60"	150cm
204-WC -(color)	48"	Coil Cord

TEFLON LEAD

Part-Number	24AWG	Lead Length
304-6W -(color)	6"	15cm
304-12W -(color)	12"	30cm
304-18W -(color)	18"	45cm
304-24W -(color)	24"	60cm
304-36W -(color)	36"	90cm
304-48W -(color)	48"	120cm
304-60W -(color)	60"	150cm



MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.

MINI-HOOK TO .080" (2.3mm) METER PIN PLUG (Illustration NOT to Scale)

Standard Unit Part Number	22AWG	Lead Length
206W -(color)	36"	90cm
Additional Lengths		
206W-12 -(color)	12"	30cm
206W-18 -(color)	18"	45cm
206W-24 -(color)	24"	60cm
206W-48 -(color)	48"	120cm
206W-60 -(color)	60"	150cm
206WC -(color)	48"	Coil Cord




MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.

.080" METER PIN PLUG: Nickel Plated Brass Body. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9207

MINI-HOOK TO .250" (6.35mm) INSULATED SPADE LUG (Illustration NOT to Scale)

Standard Unit Part Number	22AWG	Lead Length
208W -(color)	36"	90cm
Additional Lengths		
208W-12 -(color)	12"	30cm
208W-18 -(color)	18"	45cm
208W-24 -(color)	24"	60cm
208W-48 -(color)	48"	120cm
208W-60 -(color)	60"	150cm
208WC -(color)	48"	Coil Cord




MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.

.250" (6.35mm) INSULATED SPADE LUG: Nickel-Plated Brass Lug. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Units.

MINI-HOOK TO STANDARD BANANA JACK (Illustration NOT to Scale)

Part Number	22AWG	Lead Length
210-3W -(color)	3"	8cm
210-6W -(color)	6"	15cm
210-12W -(color)	12"	30cm
210-18W -(color)	18"	45cm
210-24W -(color)	24"	60cm
210-36W -(color)	36"	90cm
210-48W -(color)	48"	120cm
210-60W -(color)	60"	150cm
210WC -(color)	48"	Coil Cord



MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.

STANDARD BANANA JACK: Nickel-Plated Brass Socket. Plastic Handle. Solder Assembly. See P/N 9210.