


E-Z-HOOK XR TEST CONNECTORS




Actual Size

Basic Part Number	Description
XR-(Color)	Mini-Hook XR Test Connector
XR-S	Assortment - 1 each of 10 Solid Colors

Colors: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray and White, PLUS Kilo-Color Capability. See inside back cover for Kilo-Cover Ordering Information

The Mid-Size XR Hook bridges the gap between the General Purpose X100W and the Macro-Hook XH Model. The Contact Thickness has been increased to .025" (.635mm) for added strength and durability. The Hook has been widened to fit over components up to .059" (1.5mm) diameter. Insulated to a single contact point to assure true readings.


Construction: One-Piece Beryllium Copper, Gold-Plated Conductor and Hook per MIL G45204. Durable Nylon Body and Plunger. Stainless Steel Compression Coil Spring provides approximately 16 ozs. (454 grams) contact pressure.

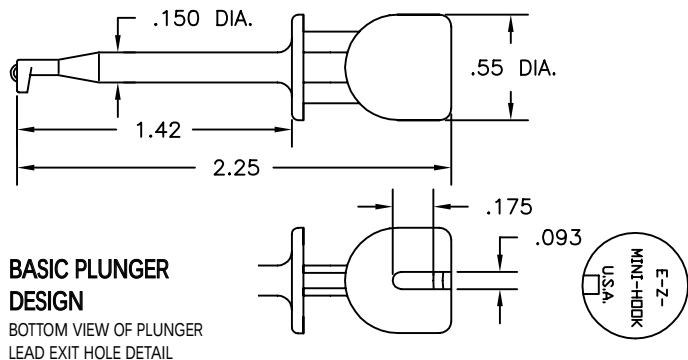

BASIC PLUNGER DESIGN

BOTTOM VIEW OF PLUNGER
LEAD EXIT HOLE DETAIL


MODEL WITH ALTERNATE PLUNGER FOR HEAVY LEAD WIRE



Construction: Identical to Basic Model except Lead Exit Hole in Plunger has been increased to .144" (3.56mm) to accommodate heavier lead wires. Available in 10 colors, PLUS Kilo-Color.

Basic Part Number	Description
XRA-(color)	Heavy Lead, Mini-Hook
XRA-S	Assortment - 1 each of 10 Solid Colors


XR25 MINI-HOOK WITH .025" SQUARE PIN

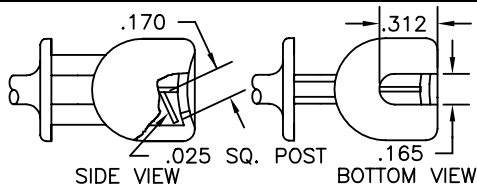

Construction: Identical to Basic XR Model except that the conductor has been formed into a square post accessible through lead exit hole in plunger. Post is designed for easy snap-on connection to .025" (.635mm) Square or .030" (.762mm) Round Push-On Type Connectors and Jumpers. Available in all 10 Colors, PLUS Kilo-Color.


Basic Part Number	Description
XR25-(color)	Mini-Hook XR with .025" Square Pin
XR-25-S	Assortment - 1 each of 10 Solid Colors

Field Serviceable: To connect or replace leads, pull straight out on plunger until it slips free of body. Strip lead wire 3/4" (19mm), feed wire through plunger and wrap around terminal as shown in figure 1. Solder. Cut off excess wire at solder point.

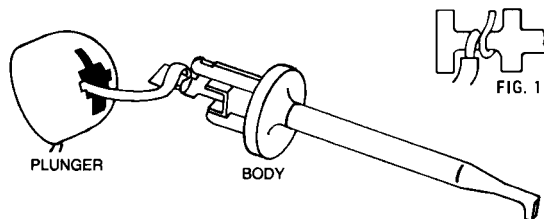

Reassemble, making sure that terminal and nylon fins enter their respective grooves. Keep slack in lead wire pulled out while assembling to prevent binding.

BASIC RECTANGULAR HOLE TIP DESIGN

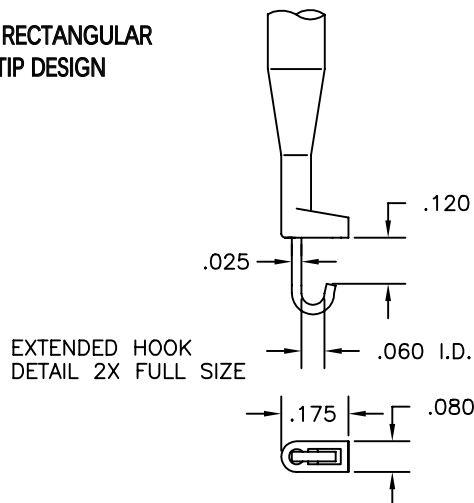

EXTENDED HOOK
DETAIL 2X FULL SIZE

NON-MAGNETIC MODELS

Construction: Identical to Basic Model Except spring is Non-Magnetic. Available in all 10 Colors, PLUS Kilo-Color.

Note: To order any Test Lead or Coaxial Cable Assemblies using XR-NM Non-Magnetic Mini-Hook, add -NM after complete part number in catalog.

Basic Part Number	Description
XR-NM-(color)	Non-Magnetic, Mini-Hook
XR-NM-S	Assortment - 1 each of 10 Solid Colors
XRA-NM-(color)	Heavy Lead, Non-Magnetic Mini-Hook
XRA-NM-S	Assortment - 1 each of 10 Solid Colors

NON-MAGNETIC XR25 MINI-HOOK


Construction: Identical to Model XR25 except spring is non-magnetic. Available in all 10 colors, PLUS Kilo-Color.

Basic Part Number	Description
XR25-NM-(color)	Non-Magnetic Mini-Hook XR with .025" Sq. Pin
XR25-NM-S	Assortment - 1 each of 10 Solid Colors

E-Z-HOOK XR TEST LEADS

MINI-HOOK XR TO .080" (2.03mm) PIN PLUG

Actual Size

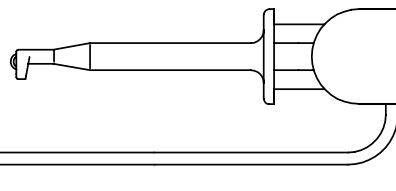

COLOR CHART	
Black	Green
Brown	Blue
Red	Violet
Orange	Gray
Yellow	White


Standard Unit Part Number	Lead Length	
AXR -(color)	36"	90cm
Additional Lengths		
AXR-12 -(color)	12"	30cm
AXR-18 -(color)	18"	45cm
AXR-24 -(color)	24"	60cm
AXR-48 -(color)	48"	120cm
AXR-60 -(color)	60"	150cm
AXRC -(color)	48" Coil Cord	

MINI-HOOK XR: Gold-Plated BeCu Contact per MIL G45204. Rectangular Hole Tip Nylon Body. Removable Plunger for easy service. Stainless Steel Spring. Hook fits over component leads to .059" (1.5mm) dia.
LEAD WIRE: 22AWG 65 x 40 Tinned Copper with extra flexible PVC Insulation.
COIL CORD: 22AWG 26 x 36 PVC Insulated Urethane Jacket. 7" Coil 61' Pigtailed. 48" Reach.
COLOR CHOICES
 1. Single Color Unit: Add desired color to Part No. See Color Chart. Example: AXR-12-Red.
 2. Color Assortment (1 ea of 10 Colors): Add -S after Part Number. Example: AXR.
 3. Multicolor Unit: See Kilo-Color Ordering Information on inside back cover.

.080" PIN PLUG: Nickel-Plated Brass Body. Plastic Handle. Solderless Assembly. See P/N 9201.

MINI-HOOK XR TO STANDARD BANANA PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
BXR -(color)	36"	90cm
Additional Lengths		
BXR-12 -(color)	12"	30cm
BXR-18 -(color)	18"	45cm
BXR-24 -(color)	24"	60cm
BXR-48 -(color)	48"	120cm
BXR-60 -(color)	60"	150cm
BXRC -(color)	48" Coil Cord	



MINI-HOOK, LEAD DESCRIPTIONS AND COLOR CHOICES: See top of page.
STANDARD BANANA PLUG: Nickel-Plated Brass Body. Nickel-Silver Leaf Springs. Plastic Handle. Solderless Assembly. See P/N 9202.

MINI-HOOK XR TO MINIATURE BANANA PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
CXR -(color)	36"	90cm
Additional Lengths		
CXR-12 -(color)	12"	30cm
CXR-18 -(color)	18"	45cm
CXR-24 -(color)	24"	60cm
CXR-48 -(color)	48"	120cm
CXR-60 -(color)	60"	150cm
CXRC -(color)	48" Coil Cord	



MINI-HOOK, LEAD DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.
MINIATURE BANANA PLUG: Nickel-Plated Phosphor Bronze Body. Nickel-Plated BeCu Leaf Springs. Plastic Handle. Solder Assembly. See P/N 9213.

MINI-HOOK XR TO STACKING BANANA PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
201XR -(color)	36"	90cm
Additional Lengths		
201XR-12 -(color)	12"	30cm
201XR-18 -(color)	18"	45cm
201XR-24 -(color)	24"	60cm
201XR-48 -(color)	48"	120cm
201XR-60 -(color)	60"	150cm
201XRC -(color)	48" Coil Cord	

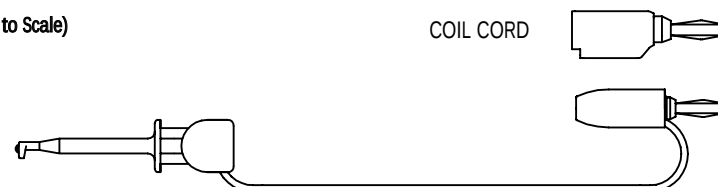

MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.
STACKING BANANA PLUG: Nickel-Plated Brass Body. Nickel-Silver Leaf Springs. Plastic Handle. Solderless Assembly. See P/N 9203.

MINI-HOOK XR TO STACKING .080" (2.03mm) PIN PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
202XR -(color)	36"	90cm
Additional Lengths		
202XR-12 -(color)	12"	30cm
202XR-18 -(color)	18"	45cm
202XR-24 -(color)	24"	60cm
202XR-48 -(color)	48"	120cm
202XR-60 -(color)	60"	150cm
202XRC -(color)	48" Coil Cord	

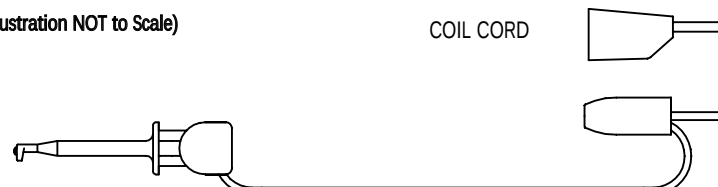

MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.
STACKING .080" (2.03mm) PIN PLUG: Nickel-Plated Brass Body. Plastic Handle. Solderless Assembly. See P/N 9204.

MINI-HOOK XR TO METER BANANA PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
205XR -(color)	36"	90cm
Additional Lengths		
205XR-12 -(color)	12"	30cm
205XR-18 -(color)	18"	45cm
205XR-24 -(color)	24"	60cm
205XR-48 -(color)	48"	120cm
205XR-60 -(color)	60"	150cm
205XRC -(color)	48" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.
METER BANANA PLUG: Nickel-Plated Brass Body. Phosphor Bronze Springs. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9206.

E-Z-HOOK XR TEST LEADS

Part Number	22AWG	Lead Length
204XR-6-(color)	6"	15cm
204XR-12-(color)	12"	30cm
204XR-18-(color)	18"	45cm
204XR-24-(color)	24"	60cm
204XR-36-(color)	36"	90cm
204XR-48-(color)	48"	120cm
204XR-60-(color)	60"	150cm
204XRC-(color)	48" Coil Cord	

TEFLON LEAD

Part Number	24AWG	Lead Length
304XR-6-(color)	6"	15cm
304XR-12-(color)	12"	30cm
304XR-18-(color)	18"	45cm
304XR-24-(color)	24"	60cm
304XR-36-(color)	36"	90cm
304XR-48-(color)	48"	120cm
304XR-60-(color)	60"	150cm

MINI-HOOK XR TO MINI-HOOK XR JUMPER



COLOR CHART	
Black	Green
Brown	Blue
Red	Violet
Orange	Gray
Yellow	White

MINI-HOOK XR: Gold-Plated BeCu Contact per MIL G45204. Rectangular Hole Tip Nylon Body with removable Plunger for easy service. Stainless Steel Spring. Hook fits leads to .059" (1.5mm) dia.

LEAD WIRE: 22AWG 65 x 40 Tinned Copper with extra flexible PVC Insulation

24AWG 19 x 36 Tinned Copper with Teflon Insulation. Temperature to 200°C.

COIL CORD: 22AWG 26 x 36 PVC Insulated. Urethane Jacket. 7" Coil. 6' Pigtailed. 48" Reach.

1. Single Color Unit: Add desired color to Part No. See color chart.

Example: 204XR-6-Red

COLOR CHOICES: 2. Color Assortment (1 ea of 10 Colors): Add -S after Part Number Example: 204XR-18-S

3. Multicolor Unit: See Kilo-Color Ordering Information on inside back cover.

MINI-HOOK XR TO .080" (2.03mm) METER PIN PLUG (Illustration NOT to Scale)

Standard Unit Part Number	22AWG	Lead Length
206XR-(color)	36"	90cm
Additional Lengths		
206XR-12-(color)	12"	30cm
206XR-18-(color)	18"	45cm
206XR-24-(color)	24"	60cm
206XR-48-(color)	48"	120cm
206XR-60-(color)	60"	150cm
206XRC-(color)	48" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.

.080" METER PIN PLUG: Nickel Plated Brass Body. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9207.

MINI-HOOK XR TO .250" (6.35mm) INSULATED SPADE LUG (Illustration NOT to Scale)

Standard Unit Part Number	22AWG	Lead Length
208XR-(color)	36"	90cm
Additional Lengths		
208XR-12-(color)	12"	30cm
208XR-18-(color)	18"	45cm
208XR-24-(color)	24"	60cm
208XR-48-(color)	48"	120cm
208XR-60-(color)	60"	150cm
208XRC-(color)	48" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.

.250" (6.35mm) INSULATED SPADE LUG: Nickel-Plated Brass Lug. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Units. See P/N 9208.

MINI-HOOK XR TO STANDARD BANANA JACK (Illustration NOT to Scale)

Part Number	22AWG	Lead Length
210XR-3-(color)	3"	8cm
210XR-6-(color)	6"	15cm
210XR-12-(color)	12"	30cm
210XR-18-(color)	18"	45cm
210XR-24-(color)	24"	60cm
210XR-36-(color)	36"	90cm
210XR-48-(color)	48"	120cm
210XR-60-(color)	60"	150cm
210XRC-(color)	48" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.

STANDARD BANANA JACK: Nickel-Plated Brass Socket. Plastic Handle. Solder Assembly. See P/N 9210.

MINI-HOOK XR TO STANDARD .080" (2.03mm) TIP JACK (Illustration NOT to Scale)

Part Number	22AWG	Lead Length
211XR-3-(color)	3"	8cm
211XR-6-(color)	6"	15cm
211XR-12-(color)	12"	30cm
211XR-18-(color)	18"	45cm
211XR-24-(color)	24"	60cm
211XR-36-(color)	36"	90cm
211XR-48-(color)	48"	120cm
211XR-60-(color)	60"	150cm
211XRC-(color)	48" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.

.080" (2.03mm) TIP JACK: Silver-Plated BeCu Contact Springs. Plastic Handle. Solder Assembly. See P/N 9211.

MINI-HOOK XR TO STANDARD ALLIGATOR CLIP (Illustration NOT to Scale)

Part Number	22AWG	Lead Length
219XR-6-(color)	6"	15cm
219XR-12-(color)	12"	30cm
219XR-18-(color)	18"	45cm
219XR-24-(color)	24"	60cm
219XR-36-(color)	36"	90cm
219XR-48-(color)	48"	120cm
219XR-60-(color)	60"	150cm
219XRC-(color)	48" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.

STANDARD ALLIGATOR CLIP: Cadmium-Plated Steel Body. Vinyl Insulator. Solder Assembly. See P/N 9274.

E-Z-HOOK XR TEST LEADS

MINI-HOOK XR TO MINIATURE ALLIGATOR CLIP (Illustration NOT to Scale)

Part Number	22AWG Lead Length	
229XR-6 -(color)	6"	15cm
229XR-12 -(color)	12"	30cm
229XR-18 -(color)	18"	45cm
229XR-24 -(color)	24"	60cm
229XR-36 -(color)	36"	90cm
229XR-48 -(color)	48"	120cm
229XR-60 -(color)	60"	150cm
229XRC -(color)	48" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See Basic P/N AXR.
MINIATURE ALLIGATOR CLIP: Cadmium-Plated Steel Body. Vinyl Insulator. Solder Assembly.
 See P/N 9275.

MINI-HOOK XR TO LEAD ONLY . . . INTERFACE (Illustration NOT to Scale)

MINI-HOOK, LEAD WIRE AND COLOR CHOICES: See Basic P/N AXR.


Part Number	22AWG Lead Length	
213XR-6 -(color)	6"	15cm
213XR-12 -(color)	12"	30cm
213XR-18 -(color)	18"	45cm
213XR-24 -(color)	24"	60cm
213XR-36 -(color)	36"	90cm
213XR-48 -(color)	48"	120cm
213XR-60 -(color)	60"	150cm
213XRC -(color)	48" Coil Cord	

TEFLON LEAD


Part Number	24AWG Lead Length	
313XR-6 -(color)	6"	15cm
313XR-12 -(color)	12"	30cm
313XR-18 -(color)	18"	45cm
313XR-24 -(color)	24"	60cm
313XR-36 -(color)	36"	90cm
313XR-48 -(color)	48"	120cm
313XR-60 -(color)	60"	150cm

E-Z-MINI-HOOK XR HEAVY DUTY TEST LEADS

MINI-HOOK XR TO SHROUDED RIGHT ANGLE STANDARD BANANA PLUG

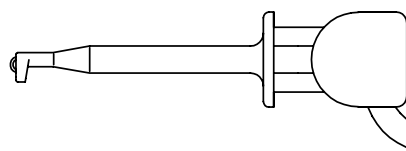

Actual Size



COLOR CHART	
Black	Green
Brown	Blue
Red	Violet
Orange	Gray
Yellow	White

Standard Unit Part Number	Lead Length	
632XR -(color)	36"	90cm
Additional Lengths		
632XR-12 -(color)	12"	30cm
632XR-18 -(color)	18"	45cm
632XR-24 -(color)	24"	60cm
632XR-48 -(color)	48"	120cm
632XR-60 -(color)	60"	150cm
632XRC -(color)	60" Coil Cord	

MINI-HOOK XR: Gold-Plated BeCu Contact per MIL G45204. Rectangular Hole Tip Nylon Body with removable Plunger for easy service. Stainless Steel Spring. Hook fits over component leads to .059" (1.5mm) dia.

LEAD WIRE: 18AWG 65 x 36 Tinned Copper with flexible PVC Insulation

COIL CORD: 20AWG 42 x 36 PVC Insulated. Urethane Jacket. 10" Coil Length. 6" Pigtailed. 60" Reach.


COLOR CHOICES

1. Single Color Unit: Add desired color to Part No. See Color Chart. Example: 635XR-18-Red.
2. Color Assortment (1 ea. of 10 Colors): Add -S after Part Number. Example: 635XR-36-S.
3. Multicolor Unit: See Kilo-Color Ordering Information on inside back cover.

SHROUDED BANANA PLUG: Nickel-Plated Brass Body. Nickel-Plated Phosphor Bronze Springs. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. Fits most Amprobe and Beckman Instruments. See P/N 9301.

MINI-HOOK XR TO SHROUDED RIGHT ANGLE STANDARD BANANA PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
633XR -(color)	36"	90cm
Additional Lengths		
633XR-12 -(color)	12"	30cm
633XR-18 -(color)	18"	45cm
633XR-24 -(color)	24"	60cm
633XR-48 -(color)	48"	120cm
633XR-60 -(color)	60"	150cm
633XRC -(color)	60" Coil Cord	

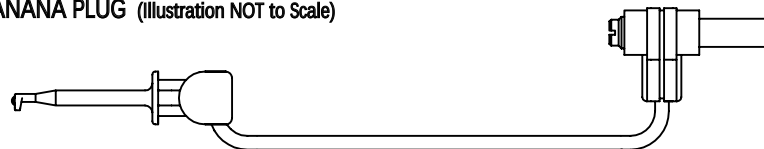


MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

SHROUDED BANANA PLUG: Nickel-Plated Brass Body. Nickel-Plated Phosphor Bronze Springs. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. Fits most Fluke and B&K Precision Instruments. See P/N 9302.

MINI-HOOK XR TO SHROUDED RIGHT ANGLE STANDARD BANANA JACK (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
634XR -(color)	36"	90cm
Additional Lengths		
634XR-12 -(color)	12"	30cm
634XR-18 -(color)	18"	45cm
634XR-24 -(color)	24"	60cm
634XR-48 -(color)	48"	120cm
634XR-60 -(color)	60"	150cm
634XRC -(color)	60" Coil Cord	

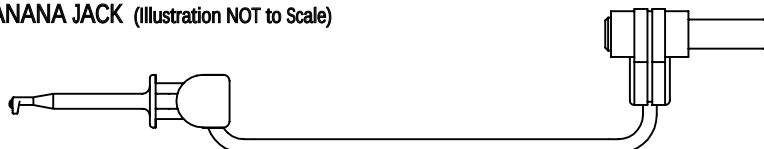

MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

SHROUDED BANANA JACK: Nickel-Plated BeCu Spring Socket. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. Fits most Simpson and Triplet Instruments. See P/N 9309.

E-Z-MINI-HOOK XR HEAVY DUTY TEST LEADS

MINI-HOOK XR TO STACKING SHROUDED BANANA PLUG

Standard Unit Part Number	Lead Length	
635XR -(color)	36"	90cm
Additional Lengths		
635XR-12 -(color)	12"	30cm
635XR-18 -(color)	18"	45cm
635XR-24 -(color)	24"	60cm
635XR-48 -(color)	48"	120cm
635XR-60 -(color)	60"	150cm
635XRC -(color)	60" Coil Cord	



STACKING SHROUDED BANANA PLUG: **Male:** Nickel-Plated Brass Body. Nickel-Plated Phosphor Bronze Springs. **Female:** Nickel-Plated BeCu Spring Socket. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. Fits most Amprobe, Beckman, Simpson and Triplett Instruments. See P/N 9305.

MINI-HOOK XR TO STACKING SHROUDED RIGHT ANGLE STANDARD BANANA PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
636XR -(color)	36"	90cm
Additional Lengths		
636XR-12 -(color)	12"	30cm
636XR-18 -(color)	18"	45cm
636XR-24 -(color)	24"	60cm
636XR-48 -(color)	48"	120cm
636XR-60 -(color)	60"	150cm
636XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.
STACKING SHROUDED BANANA PLUG: Nickel-Plated Brass Body and Socket. Nickel-Plated Phosphor Bronze Springs. Plastic Handle. Solderless Assembly. Red, Black. Red will be provided with colors other than Black. Fits most Fluke and B&K Precision Instruments. See P/N 9306.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO .080" (2.03mm) PIN PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
AX6XR -(color)	36"	90cm
Additional Lengths		
AX6XR-12 -(color)	12"	30cm
AX6XR-18 -(color)	18"	45cm
AX6XR-24 -(color)	24"	60cm
AX6XR-48 -(color)	48"	120cm
AX6XR-60 -(color)	60"	150cm
AX6XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.
.080" (2.03mm) PIN PLUG: Nickel-Plated Brass Body. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9250.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO STANDARD BANANA PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
BX6XR -(color)	36"	90cm
Additional Lengths		
BX6XR-12 -(color)	12"	30cm
BX6XR-18 -(color)	18"	45cm
BX6XR-24 -(color)	24"	60cm
BX6XR-48 -(color)	48"	120cm
BX6XR-60 -(color)	60"	150cm
BX6XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.
STANDARD BANANA PLUG: Nickel-Plated Brass Body. Nickel-Silver Springs. Plastic Handle. Solderless Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9214.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO STACKING BANANA PLUG (Illustration NOT to Scale)


Standard Unit Part Number	Lead Length	
601XR -(color)	36"	90cm
Additional Lengths		
601XR-12 -(color)	12"	30cm
601XR-18 -(color)	18"	45cm
601XR-24 -(color)	24"	60cm
601XR-48 -(color)	48"	120cm
601XR-60 -(color)	60"	150cm
601XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See top of page.
STACKING BANANA PLUG: Nickel-Plated Brass Body. Nickel-Silver Leaf Springs. Plastic Handle. Snap Together Solderless Assembly. See P/N 9260.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO STACKING .080" (2.03mm) PIN PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
602XR -(color)	36"	90cm
Additional Lengths		
602XR-12 -(color)	12"	30cm
602XR-18 -(color)	18"	45cm
602XR-24 -(color)	24"	60cm
602XR-48 -(color)	48"	120cm
602XR-60 -(color)	60"	150cm
602XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS, TIP AND COLOR CHOICES: See top of page.
STACKING .080" (2.03mm) PIN PLUG: Nickel-Plated Brass Body. Plastic Handle. Solderless Assembly. See P/N 9259.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO MINI-HOOK XR . . . JUMPER (Illustration NOT to Scale)

Part Number	Lead Length	
604XR-12 -(color)	12"	30cm
604XR-18 -(color)	18"	45cm
604XR-24 -(color)	24"	60cm
604XR-36 -(color)	36"	90cm
604XR-48 -(color)	48"	120cm
604XR-60 -(color)	60"	150cm
604XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO METER BANANA PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
605XR -(color)	36"	90cm
Additional Lengths		
605XR-12 -(color)	12"	30cm
605XR-18 -(color)	18"	45cm
605XR-24 -(color)	24"	60cm
605XR-48 -(color)	48"	120cm
605XR-60 -(color)	60"	150cm
605XRC -(color)	60" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

METER BANANA PLUG: Nickel-Plated Brass Body. Phosphor Bronze Springs. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9206.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO .080" (2.03mm) METER PIN PLUG (Illustration NOT to Scale)

Standard Unit Part Number	Lead Length	
606XR -(color)	36"	90cm
Additional Lengths		
606XR-12 -(color)	12"	30cm
606XR-18 -(color)	18"	45cm
606XR-24 -(color)	24"	60cm
606XR-48 -(color)	48"	120cm
606XR-60 -(color)	60"	150cm
606XRC -(color)	60" Coil Cord	

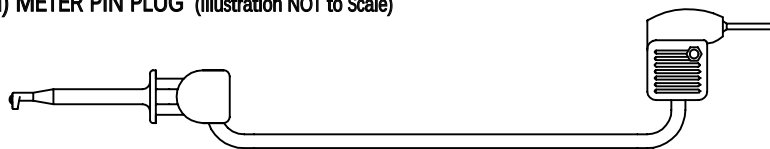


MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

.080" (2.03mm) METER PIN PLUG: Nickel-Plated Brass Body. Plastic Handle. Solder Assembly. Red, Black. Red will be supplied with colors other than Black Unit. See P/N 9207.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO STANDARD BANANA JACK (Illustration NOT to Scale)

Part Number	Lead Length	
610XR-6 -(color)	6"	15cm
610XR-12 -(color)	12"	30cm
610XR-18 -(color)	18"	45cm
610XR-24 -(color)	24"	60cm
610XR-36 -(color)	36"	90cm
610XR-48 -(color)	48"	120cm
610XR-60 -(color)	60"	150cm
610XRC -(color)	60" Coil Cord	




MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

STANDARD BANANA JACK: Nickel-Plated Brass Socket. Plastic Handle. Solder Assembly. See P/N 9210.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO .080" (2.03mm) TIP JACK (Illustration NOT to Scale)

Part Number	Lead Length	
611XR-6 -(color)	6"	15cm
611XR-12 -(color)	12"	30cm
611XR-18 -(color)	18"	45cm
611XR-24 -(color)	24"	60cm
611XR-36 -(color)	36"	90cm
611XR-48 -(color)	48"	120cm
611XR-60 -(color)	60"	150cm
611XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

.080" (2.03mm) TIP JACK: Silver-Plated BeCu Contact Springs. Plastic Handle. Solder Assembly. See P/N 9211.

MINI-HOOK XR WITH HEAVY DUTY LEAD ONLY . . . NO INTERFACE (Illustration NOT to Scale)


Part Number	Lead Length	
613XR-12 -(color)	12"	30cm
613XR-18 -(color)	18"	45cm
613XR-24 -(color)	24"	60cm
613XR-36 -(color)	36"	90cm
613XR-48 -(color)	48"	120cm
613XR-60 -(color)	60"	150cm
613XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

MINI-HOOK XR WITH HEAVY DUTY LEAD TO STANDARD ALLIGATOR CLIP (Illustration NOT to Scale)

Part Number	Lead Length	
619XR-12 -(color)	12"	30cm
619XR-18 -(color)	18"	45cm
619XR-24 -(color)	24"	60cm
619XR-36 -(color)	36"	90cm
619XR-48 -(color)	48"	120cm
619XR-60 -(color)	60"	150cm
619XRC -(color)	60" Coil Cord	



MINI-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See P/N 632XR.

STANDARD ALLIGATOR CLIP: Cadmium-Plated Steel Body. Vinyl Insulator. Solder Assembly. See P/N 9274.