

# SM Beads (Differential- Mode)

Part Number: 2773021447

73 SM BEAD

## Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 6 = Bulk Packed, 7 = Taped and Reeled

**Surface mount beads are available from Fair- Rite in several materials and sizes. Their rugged construction lowers the dc resistance and increases current carrying capacity compared to plated beads.**

Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating.

SM Beads meet the solderability specifications when tested in accordance with MIL- STD-202, method 208. After dipping the mounting site of the bead, the solder surface shall be at least 95% covered with a smooth solder coating. The edges of the copper strip are not specified as solderable surfaces.

After preheating the beads to within 100 °C of the soldering temperature, the parts meet the resistance to soldering requirements of EIA-186-10E, temperature 260 ±5 °C and time 10 ±1 seconds.

Recommended storage and operation temperature is -55 °C to 125 °C.

Our “Surface Mount Bead Kit” (part number 0199000025) is available for prototype evaluation.

## Recommended Soldering Profile

### Packaging Options:

- SM Beads on 12 mm tape width are supplied taped and reeled per EIA 481 and IEC 60286-3 standards. SM Beads on 16 and 24 mm tape widths are supplied taped and reeled per EIA 481 and IEC 60286-3 standards. Taped and reeled parts are supplied on a 13" reel.
- SM Beads can also be supplied not taped and reeled and then are bulk packed. This packing method will change the last digit of the part number to a “6”.

**For any SM Bead requirement not listed, please contact our customer service group for availability and pricing.**

## Catalog Drawing

### 3D Model


Suggested land patterns are in accordance with the latest revision of IPC-7351.

Weight: 0.3 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 3.05 | Max    | 0.120        | —          |
| B   | 3.05 | ±0.10  | 0.12         | —          |
| C   | 9.6  | Max    | 0.364        | —          |
| D   | 1.5  | ±0.50  | 0.059        | —          |

| Land Patterns    |                  |                  |                  |   |
|------------------|------------------|------------------|------------------|---|
| V                | W                | X                | Y                | Z |
| 4.50<br>(0.177") | 7.50<br>(0.295") | 1.80<br>(0.071") | 3.00<br>(0.118") | — |

| Reel Information |             |                  |                   |                   |
|------------------|-------------|------------------|-------------------|-------------------|
| Tape Width<br>mm | Pitch<br>mm | Parts 7"<br>Reel | Parts 13"<br>Reel | Parts 14"<br>Reel |
| 16               | 8           | --               | 2800              | --                |

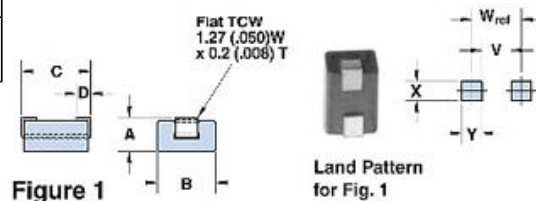

# Chart Legend

+ Test frequency



| Typical Impedance ( $\Omega$ ) |     |
|--------------------------------|-----|
| 1 MHz                          | 31  |
| 5 MHz                          | 68  |
| 10 MHz <sup>+</sup>            | 92  |
| 25 MHz <sup>+</sup>            | 100 |

| Electrical Properties |     |
|-----------------------|-----|
| Max Rdc(m $\Omega$ )  | 1.2 |

SM Beads are controlled for impedance limits only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed value less 20%.

SM Beads in 73, 43 and 44 materials are measured for impedance on the E4990A Impedance Analyzer. The 52 and 61 SM Beads are tested for impedance on the E4991A / HP4291B Impedance Analyzer.

The maximum practical current rating for these SM Beads is 5 amps, check the component bias curves. The 019/021/037 and 044 SM Beads can withstand a continuous current of 10 amps resulting in a component temperature rise < 40 °C

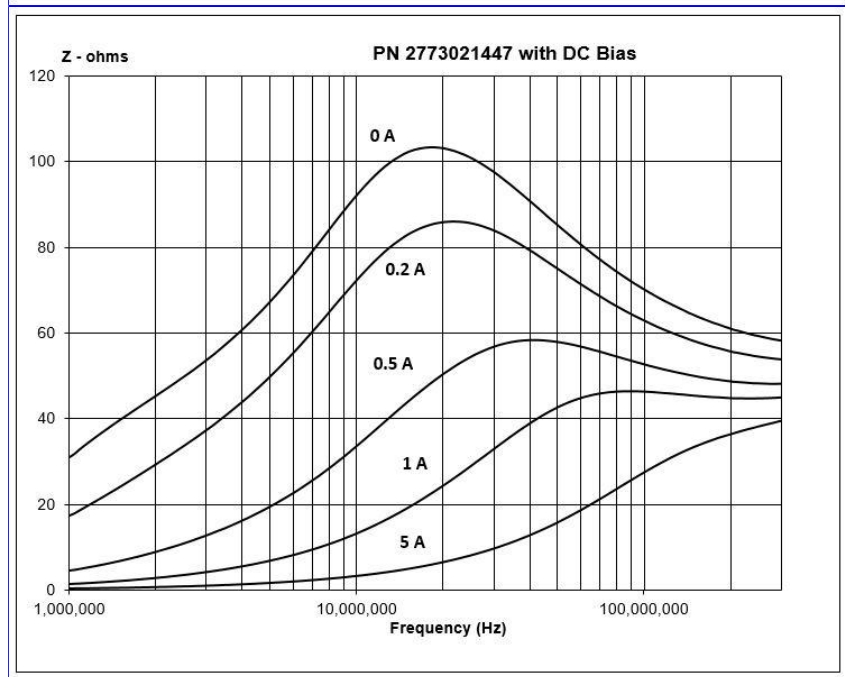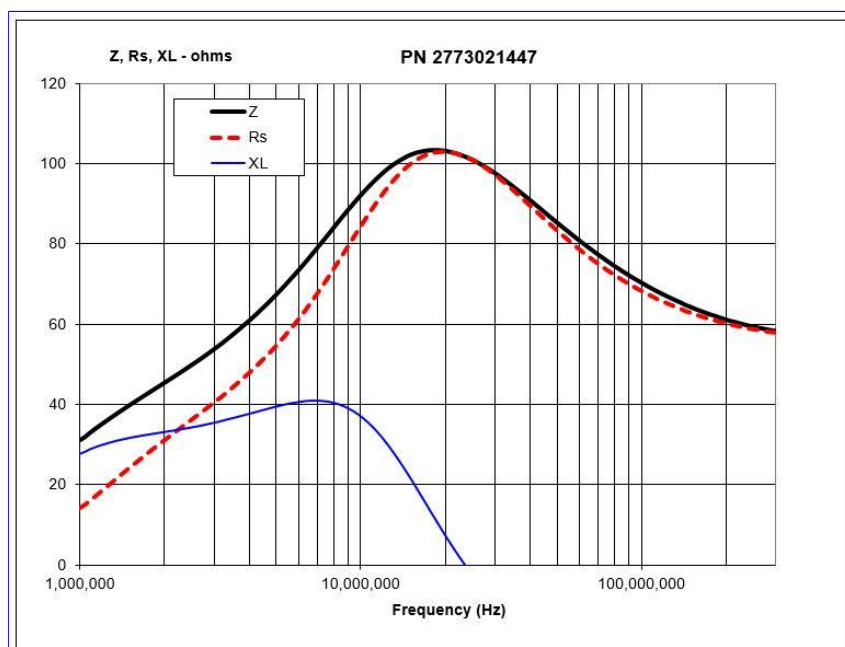

[CSV Download](#)

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com