
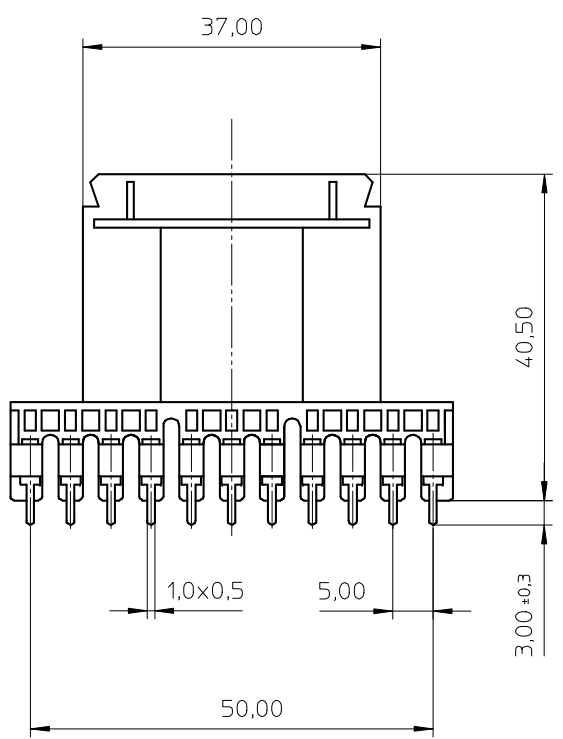
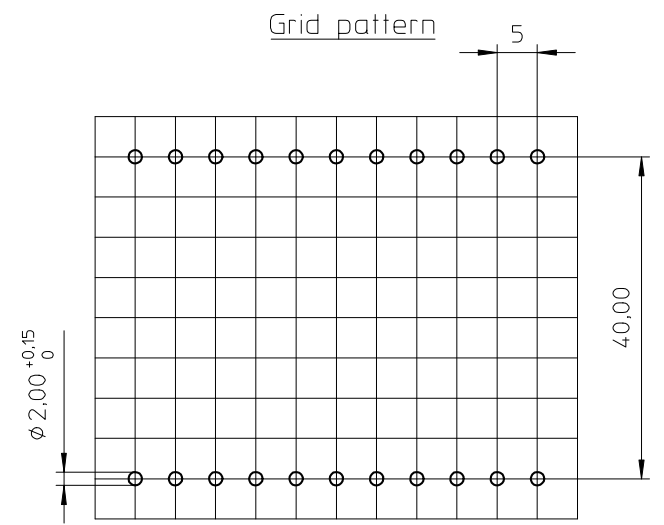
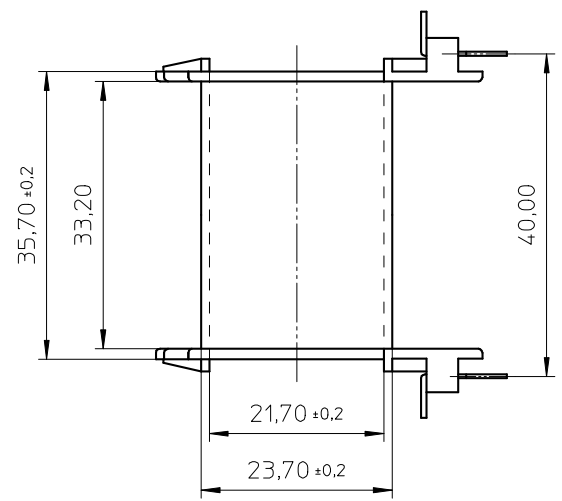


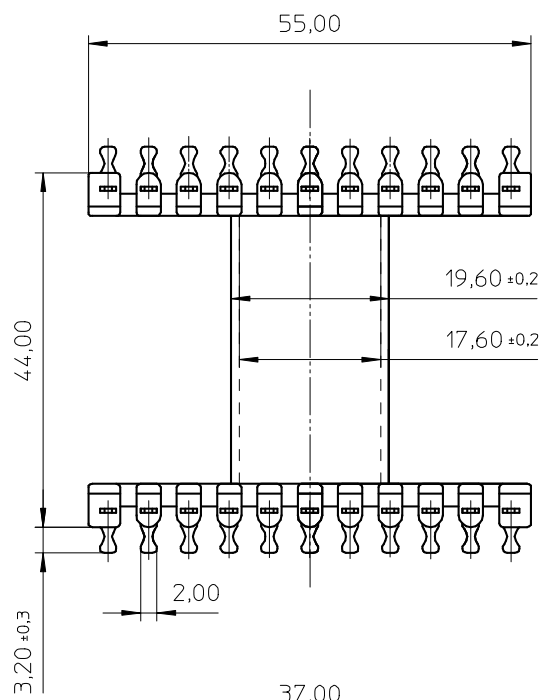

Coil former material: Rynite FR530 (PET), glass-reinforced,
 UL file number: E41938 - UL94V-0.

max. operating temp: 180°C, class H


pin material: CuSn, Sn plated.

solderability: acc. to IEC 60 068-2-20 part2, Test Ta method 1, 235°C-2sec.

Resistance to soldering heat: acc. to IEC 60 068-2-20 part2, Test Tb, method 1, 350°C-3,5sec

mean length of turn: 120 mm

winding area: 250² mm



CLASSNO.		CPH-E55/28/21-1S-22PD-Z		4322 021 06791		07-10-18
NAME NAAM	A.Wojtasz	SUPERS. VERV.		SP/SH BL/BL	-	A3
MPA	CHECK CONTR.	DAT.	07-10-18	Property of Eigendom van	© FERROXCUBE 2007	