

► Heatsinks f.cool

► Cases f.case

▼ Connectors f.con

► Sockets

► PCB connectors

► IDC-connectors

▼ D-Sub connectors

■ D-Sub standard connectors

■ D-Sub connectors High Density

■ D-Sub filter connector

■ D-Sub connector for flat ribbon cable

■ D-Sub mixed layout connectors

■ [D-Sub in SMD-mounting](#)

■ D-Sub connector in pressfit technology

■ D-Sub hoods

■ D-Sub accessories

■ Brackets for PC

► Optoelectronics

D-Sub in SMD-mounting


DB ... SMD TR

DB 09 SMD TR

Female headers; Rollenaußendurchmesser 330 mm, packing: tape and reel (150 pcs/reel)

Data sheet

add to request

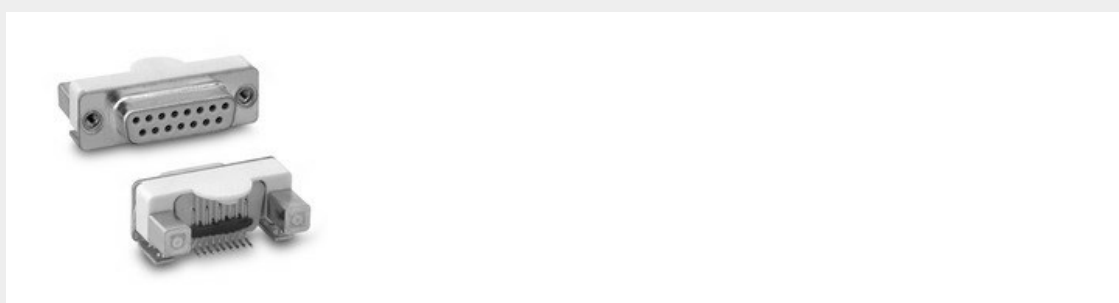

Features

Technical Drawing

Variants

Service

contact material	Cu-alloy
surface contact / contact sleeve	hard gold plated over nickel
quality class / cycles of operation	quality class 2 = 200 cycles of operation
volume resistance	≤10 mΩ before strain, ΔR 10 mΩ after strain according to DIN 41652. part 2 (MIL-C-24308)
air gap and creep distance	cont.-contact <1mm contact-earth <1mm
nominal current	5A (20°C)
nominal voltage	125 V AC
test voltage	1000 V
insulating body material	PBT, GF
temperature range	-55°C... +125°C
casing frame	steel, tin plated
class of inflammability	UL 94 V-0
insulation resistance	≥5 GΩ