

D-Sub mixed layout connectors

DBM 3W3 L


- Female headers - suitable for standard D-sub connectors
- gold-plated contacts
 - for power cables up to AWG 16
 - combinable with high-power contacts art. HAB 15 ... L or HAB 15 ... TA
- design: female

Your web browser (Safari 4) is out of date.

Update your browser for more security, speed and the best experience on this site.

Update browser

Ignore




Overview	Features	Technical Drawing	Service	Data sheet
----------	----------	-------------------	---------	------------

Features

contact material:	Cu-alloy
surface contact / contact sleeve:	<ul style="list-style-type: none">• (≥0.1µm Au over 2...4µm chem. NiP)• nickel-phosphorus-gold-surface
quality class / cycles of operation:	quality class 2 = 200 cycles of operation
nominal current:	<ul style="list-style-type: none">• signal contact: ≤5 A• power contact: ≤20 A
nominal voltage:	125 V AC
test voltage:	1000 V
insulating body material:	Polyester, GF
temperature range:	-55°C... +125°C
casing frame:	steel, tin plated
class of inflammability:	UL 94 V-0
insulation resistance:	≥5 GΩ

Technical Drawing

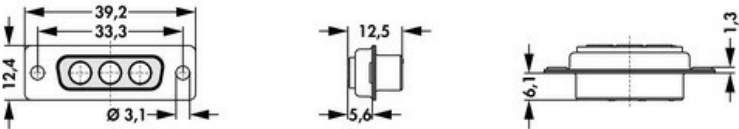

Service

Technical explanations



[Explanations – references – printings](#)



[Technical introduction for the connector catalogue](#)

Data sheet



[Data sheet](#)

Products	Company	Latest news	Service	Contact
Heatsinks f.cool - product search	Guidelines	Press releases	Catalogue	Representations worldwide
Thermally conductive material	The enterprise	Newsletter	Newsletter subscription	Distributors worldwide
Cases f.case - product search	Certification	Exhibitions and Conventions	Sample	Itinerary
Connectors f.con - product search	General sales conditions		Downloads	
	General Terms and Conditions ...		Technical informations	
	Contract Terms and Conditions ...		Links	
			Sampling	



[Feedback](#) [Sitemap](#) [Data Protection](#) [Site notice](#)

