





SMD-version

model	KX – 7F
frequency	8,0
mode	fundamental
operating temperature	-40° ~ +125°C
frequency tolerance at +25°C	± 50 ppm
temperature tolerance -40° ~ +125°C	±150 ppm
load capacitance C _L	12 pF
series resonance R1 max.	500 Ohm
aging at +25°C (first year) max.	± 2 ppm
shunt capacitance C ₀ max.	5,0 pF
drive level max.	100 μW
AEC-Q200	yes
contents of reel	1000 pcs.
part no.	12.60048


Dimensions (mm):

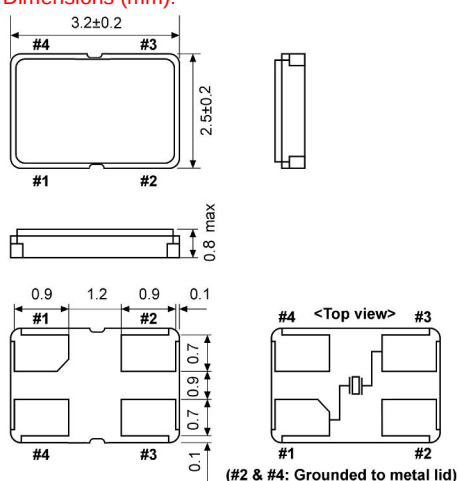

Suggested soldering pad:



Reflow soldering condition:

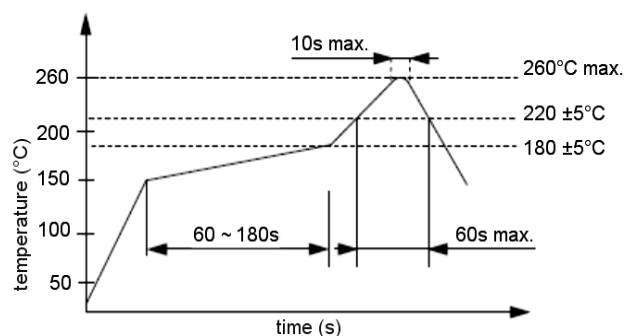

Tape specification:

