


## Quartz Crystal


SMD-version

|                                       |              |
|---------------------------------------|--------------|
| part no.                              | 12.61000     |
| model                                 | KX – 3T      |
| frequency                             | 26.0 MHz     |
| mode                                  | fundamental  |
| operating temperature                 | -40° ~ +85°C |
| frequency tolerance at +25°C          | ±10 ppm      |
| temperature tolerance<br>-40° ~ +85°C | ±15 ppm      |
| load capacitance $C_L$                | 6 pF         |
| series resistance<br>$R_1$ max.       | 150 Ohm      |
| aging at +25°C (first year) max.      | ±2 ppm       |
| shunt capacitance $C_0$ max.          | 2.0 pF       |
| drive level max.                      | 50 µW        |
| contents of reel                      | 1000 pcs.    |


Dimensions (mm) :

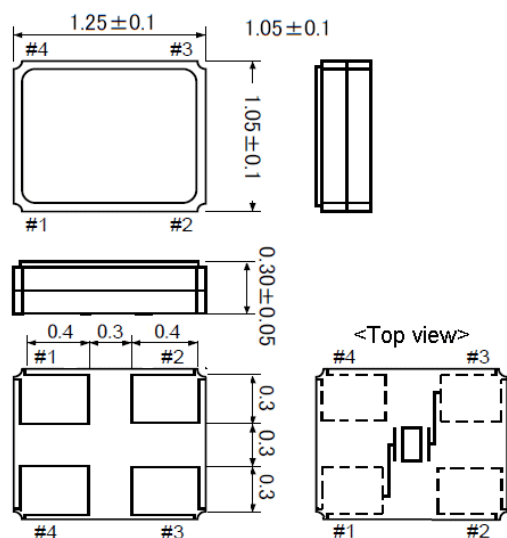


Suggested soldering pad:



Reflow soldering condition:

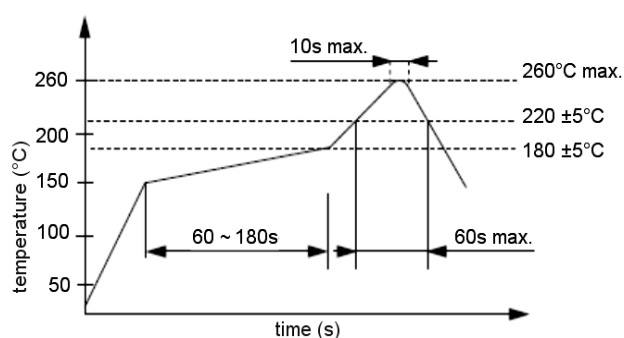

Tape specification:

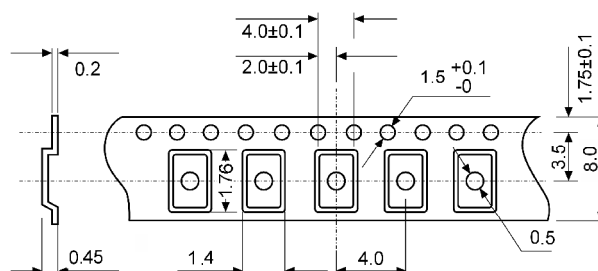

reel diameter 178 mm