




Quartz Crystal


HC-49/U3H (low profile)

model	KX - 3H
frequency	13,560 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-20° ~ + 70°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance at -20° ~ + 70°C	± 50 ppm
load capacitance C_L	16 pF
series resonance R_1 max.	50 Ohm
aging at 25°C (first year) max.	± 5 ppm
shunt capacitance C_0 max.	7 pF
drive level mW	0,1
RoHS	according to RoHS 2011/65/EU
part no.	12.84305


Dimensions (mm):

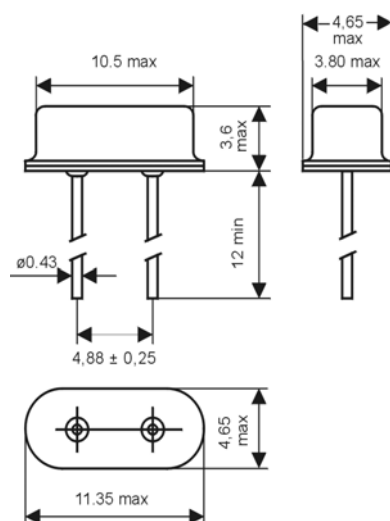

Wave soldering condition:

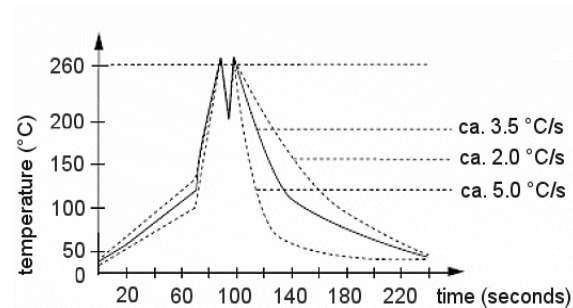

Tape specification:

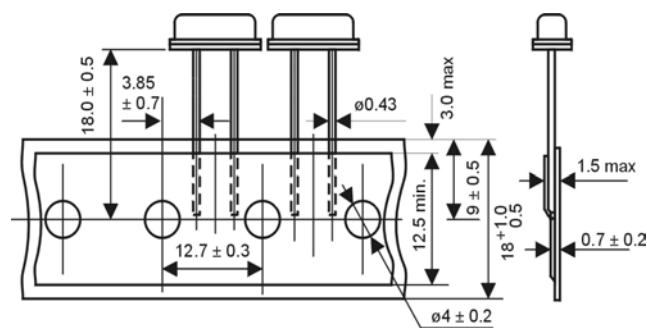

Taped crystals upon request