RoHS 2011/65/EU REACH compliant Conflict minerals free

GEYER quartz technology

Quartz Crystal

HC-49/U3H (low profile)

model	KX - 3HT
frequency	5,0 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance at -40° ~ + 85°C	± 50 ppm
load capacitance C_L	16 pF
series resonance R1 max.	120 Ohm
aging at +25°C (first year) max.	± 2 ppm
shunt capacitance C_0 max.	7 pF
drive level max.	0,1 mW
part no.	12.84537

Dimensions (mm):

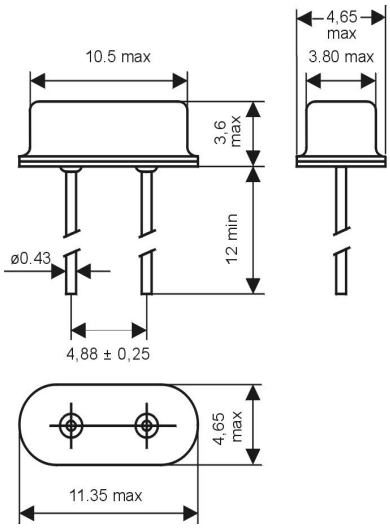

Wave soldering condition:

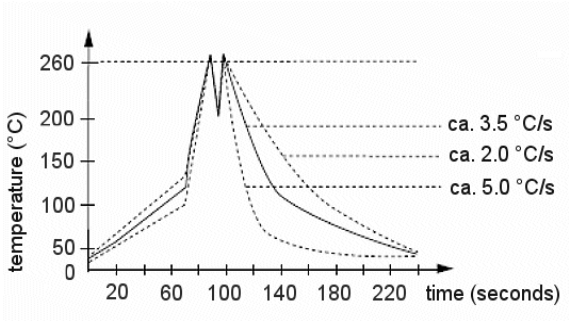

Tape specification:

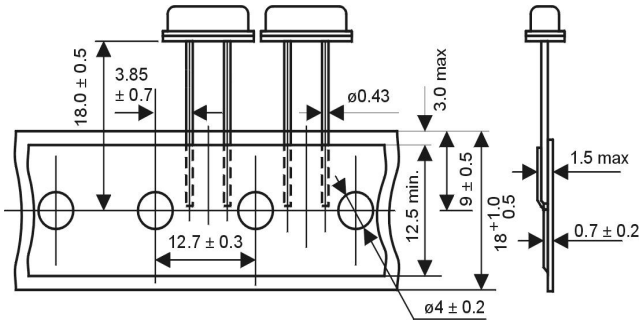

GEYER ELECTRONIC e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
Tel. +49 89 546868-0 Fax +49 89 546868-91 quartz@geyer-electronic.de

Version 21.02.2017

Downloaded from Arrow.com.