RoHS 2011/65/EU REACH compliant Conflict minerals free

GEYER quartz technology

# Quartz Crystal

HC-49/U3H (low profile)

| | |
|---|---|
| model | KX - 3HT |
| frequency | 12,2880 MHz |
| holder type | HC-49/U3H |
| mode | fundamental |
| operating temperature | -40° ~ + 85°C |
| frequency tolerance at +25°C | ± 30 ppm |
| temperature tolerance at -40° ~ + 85°C | ± 50 ppm |
| load capacitance $C_L$ | 16 pF |
| series resonance R1 max. | 50 Ohm |
| aging at +25°C (first year) max. | ± 2 ppm |
| shunt capacitance $C_0$ max. | 7 pF |
| drive level max. | 0,1 mW |
| part no. | 12.84543 |

Dimensions (mm):

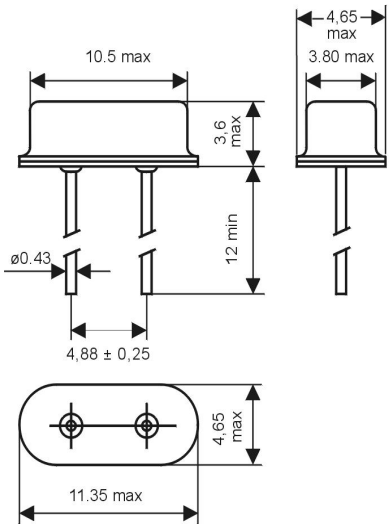


Wave soldering condition:

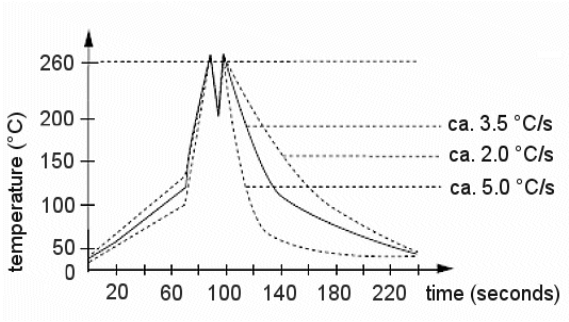


Tape specification:

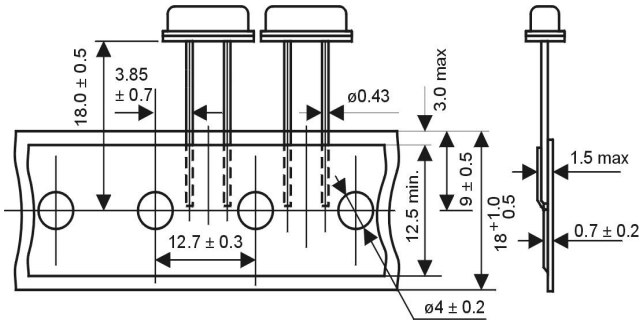


**GEYER ELECTRONIC** e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
Tel. +49 89 546868-0 Fax +49 89 546868-91 quartz@geyer-electronic.de

Version 21.02.2017

Downloaded from Arrow.com.