




## Quartz Crystal


HC-49/U3H (low profile)

|                                       |              |
|---------------------------------------|--------------|
| model                                 | KX - 3HT     |
| frequency                             | 24,5760 MHz  |
| holder type                           | HC-49/U3H    |
| mode                                  | fundamental  |
| operating temperature                 | -40° ~ +85°C |
| frequency tolerance at +25°C          | ± 30 ppm     |
| temperature tolerance at -40° ~ +85°C | ± 50 ppm     |
| load capacitance $C_L$                | 16 pF        |
| series resonance $R_1$ max.           | 40 Ohm       |
| aging at +25°C (first year) max.      | ± 2 ppm      |
| shunt capacitance $C_0$ max.          | 7 pF         |
| drive level max.                      | 0,1 mW       |
| part no.                              | 12.84552     |

Dimensions (mm):

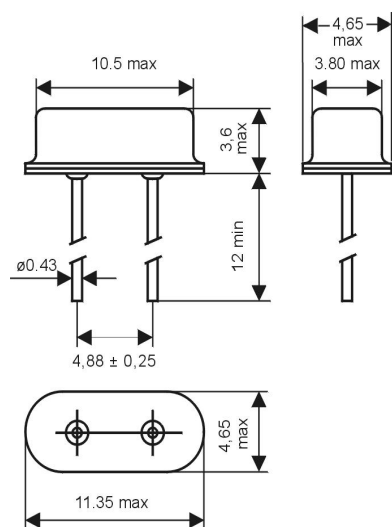

Wave soldering condition:

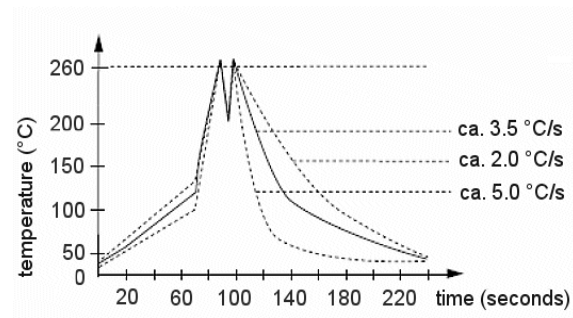

Tape specification:

