

RoHS 2015/863/EU REACH compliant Conflict minerals free

GEYER quartz technology

Quartz Crystal

SMD-version

part no.	12.86537
model	KX – 6
frequency	12.0 MHz
mode	fundamental
operating temperature	-20° ~ +70°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -20° ~ +70°C	±50 ppm
load capacitance C_L	10 pF
series resistance R1 max.	150 Ohm
aging at 25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level max.	100 µW
contents of reel	1000 pcs.

Dimensions (mm):

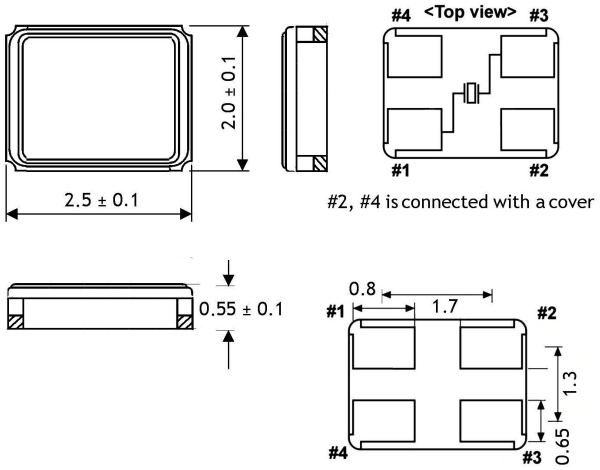

Reflow soldering condition:

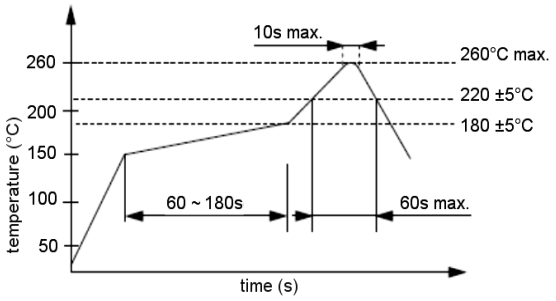

Tape specification:

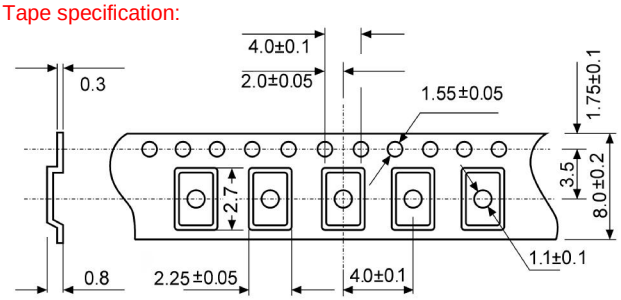

reel diameter 178 mm

Suggested soldering pad:



GEYER ELECTRONIC e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
Tel. +49 89 546868-0 quartz@geyer-electronic.de www.geyer-electronic.de

Version 12.12.2019

Downloaded from Arrow.com.