


Quartz Crystal


SMD-version

part no.	12.86564
model	KX – 6T
frequency	14.318180 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -40° ~ +85°C	±100 ppm
load capacitance C_L	10 pF
series resistance R1 max.	100 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level	100 µW
contents of reel	1000 pcs.
part no.	12.86564


Dimensions (mm):

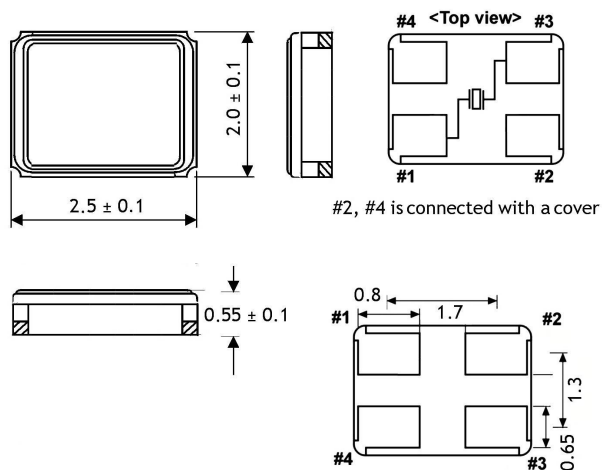

Suggested soldering pad:



Reflow soldering condition:

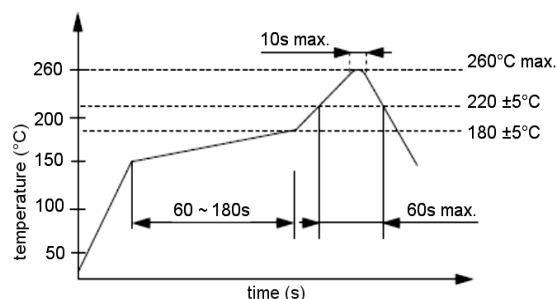

Tape specification:

