





Tuning Fork Crystal


SMD-version

part no.	12.87031
model	KX-327RTS
frequency	32.768 kHz
operating temperature	-40° ~ +85°C
frequency tolerance (df/F) at +25°C ±3°C	±20 ppm
temperature tolerance (parabolic coefficient)	-0.033 ppm ±10%/°C ² typ.
turnover temperature	+25°C ±5°C
storage temperature range	-55°C ~ +125°C
load capacitance C _L	7 pF
series resistance R1 max.	75k Ohm
aging (df/F) (first year) at 25°C ± 3°C max.	±3 ppm
shunt capacitance C ₀	1.0 pF typ.
drive level	0.1 µW typ.
contents of reel	3000 pcs.


Dimensions (mm):

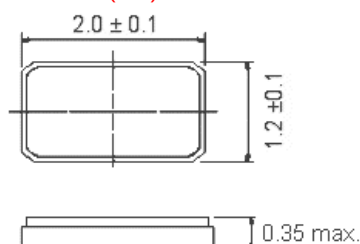


Suggested soldering pad:



Reflow soldering condition:

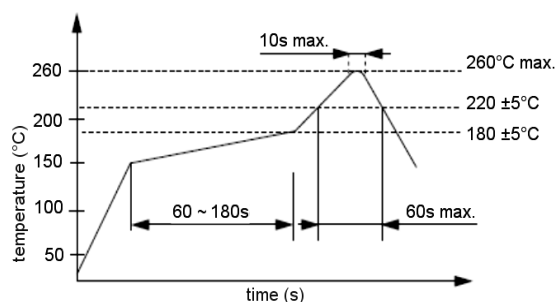

Tape specification:

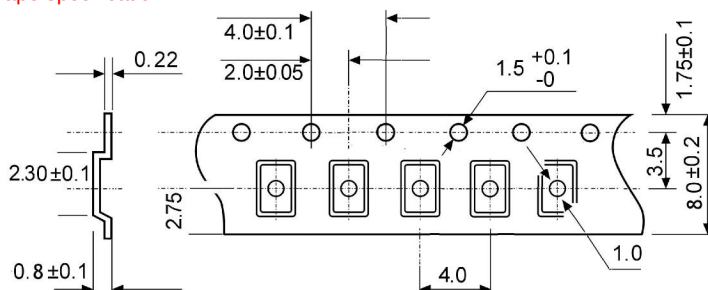

reel diameter 180 mm