

RoHS 2011/65/EU ✓ REACH compliant ✓ Conflict minerals free ✓

GEYER quartz technology

Quartz Crystal

SMD-version

model	KX – 9AE
frequency	8,0 MHz
mode	fundamental
operating temperature	-40° ~ +105°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance -40° ~ +105°C	±120 ppm
load capacitance C_L	16 pF
series resonance R1 max.	100 Ohm
aging at 25°C (first year) max.	± 2 ppm
shunt capacitance C_0 max.	5,0 pF
drive level in mW max.	0,05
contents of reel	1000 pcs.
part no.	12.89112

Dimensions (mm):

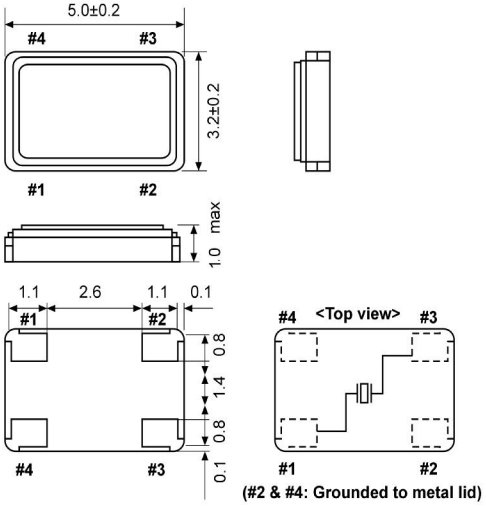

Reflow soldering condition:

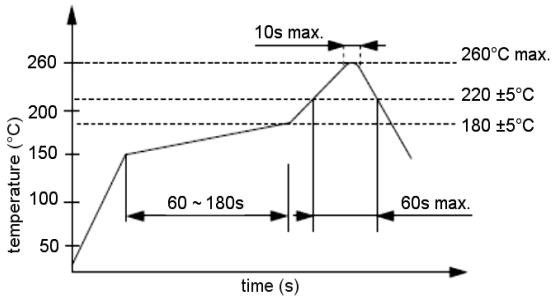

Suggested soldering pad:



Tape specification:

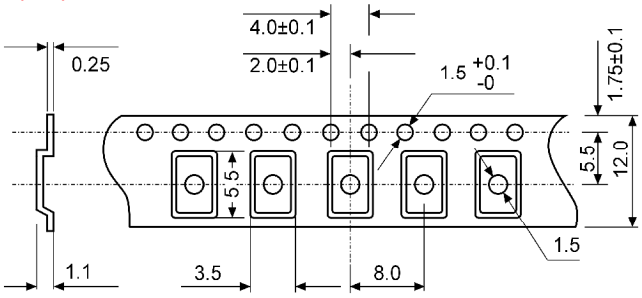

reel diameter 178 mm

GEYER ELECTRONIC e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
Tel. +49 89 546868-0 quartz@geyer-electronic.de www.geyer-electronic.de

Version 15.07.2008

Downloaded from Arrow.com.