





169 SERIES LINE ISOLATION TRANSFORMERS (115V to 115V)

- Primary 115VAC, 60 Hz., Secondary 115VAC
- Electrostatic shield between primary & secondary
- Connection by flexible leads, 8" minimum length
- Perfect for circuit isolation or "Classic" bias power supply
- CSA certified (# LR3902)

Transformer Schematic




Cat. No.	Capacity VA	Sec. Current ma	Dimensions					Wt. Lbs.
			A	B	C	D	E	
169PS	15	130	1.88	2.07	2.50	1.50	1.19	1.3
169QS	40	260	2.19	2.50	2.63	1.75	1.44	2.5
169RS	60	435	2.50	2.75	3.06	2.00	1.69	3.3
169SS	90	650	2.50	3.25	3.06	2.00	2.19	4.5
169TS	135	870	3.13	3.50	3.81	2.50	2.19	6.5
169VS	175	1300	3.13	4.00	3.81	2.50	2.69	7.0
169WS	250	1700	3.75	4.00	4.56	3.00	2.81	12.0


169 SERIES LINE ISOLATION - TAPPED TRANSFORMERS (115V to 90-130V)

- Primary 115VAC, 60 Hz.
- Secondary taps @ 90, 100, 110, 115, 120 & 130VAC
- Electrostatic shield between primary & secondary
- Connection by flexible leads, 8" minimum length
- Perfect for critical line voltage needs (ex. Japanese 100V equipment).
- CSA certified (# LR3902) - except 169J

Cat. No.	Capacity VA	Dimensions					Wt. Lbs.
		A	B	C	D	E	
169C	100	2.50	3.50	3.06	2.00	2.44	4
169E	250	3.75	4.00	4.56	3.00	2.81	7
169G	500	6.75	5.50	4.56	3.00	4.31	15
169J	750	4.38	6.13	5.25	3.50	4.50	22



Transformer Schematic

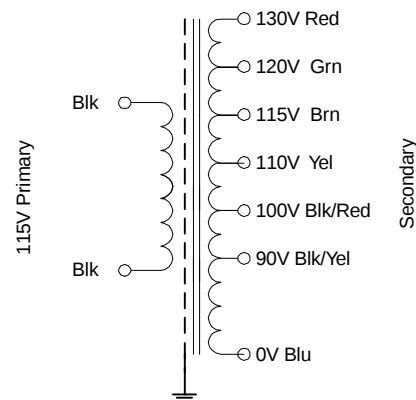

Line

CANADA

Phone: (519) 822-2960 Fax: (519) 822-0715

USA

Phone: (716) 651-0086 Fax: (716) 651-0726



© 2000

**HAMMOND
MANUFACTURING™**
www.hammondmfg.com