



DIMENSIONS:	
A	3.125" ± 0.063
B	3.250" ± 0.125
C	3.750" ± 0.063
D	1.100" ± 0.063
E	2.500" ± 0.063
F	3.125" ± 0.063

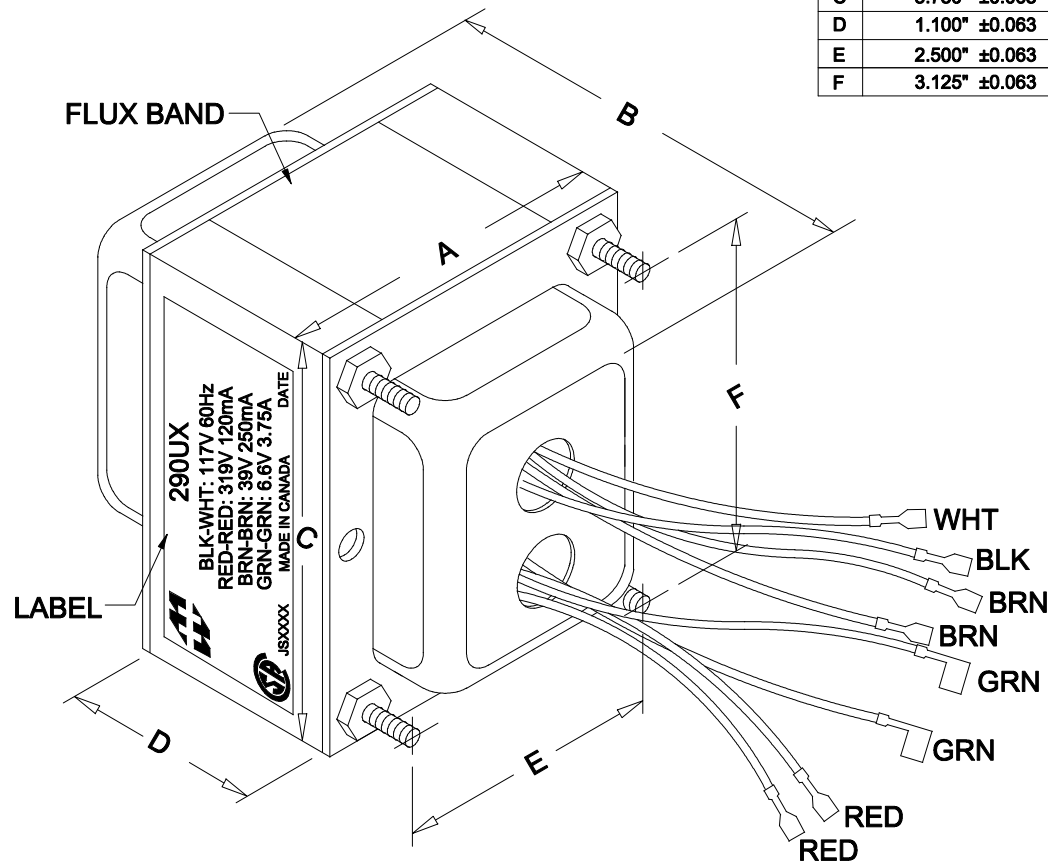

NOTE: ALL LEADS 12" OUT MIN.

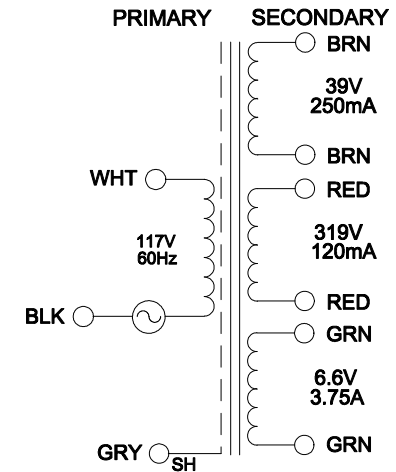

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, BLK - WHT	200mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT		
	RED - RED =	331.3V	$\pm 2\%$
	BRN - BRN =	40.95V	$\pm 2\%$
	GRN - GRN =	7.082V	$\pm 2\%$
DCR	@ 20°C, BLK - WHT =	4.140 Ω	$\pm 20\%$
	@ 20°C, RED - RED =	44.94 Ω	$\pm 20\%$
	@ 20°C, BRN - BRN =	4.800 Ω	$\pm 20\%$
	@ 20°C, GRN - GRN =	0.080 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	07/26/11	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181		FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 290UX TRANSFORMER	DWG. NO. 290UX
			DATE: 07/26/11	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		