


560G

P.C. BOARD MOUNT - EPOXY POTTED AUDIO TRANSFORMER

- Rugged black epoxy potted case with 9 pin connections (0.025" square by 0.5" long)
- Higher signal levels possible with reduced low frequency performance
- Electrostatic shield between primary & secondary connected to core and pin "SH"
- Humbucking construction
- Balanced split windings on primary & secondary for circuit versatility
- Primaries and secondaries can be reversed for impedance matching
- Overall dimensions 1.64" x 1.33" x 0.80" high max
- Shipping weight 4 oz

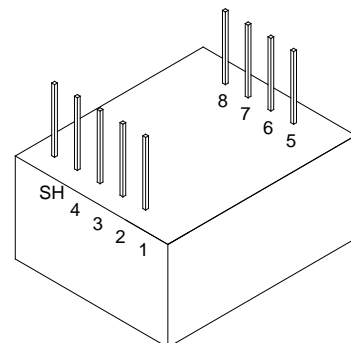


Power level: 0dbm @ 30 Hz. to 30 KHz.

-Freq. range @ +0 dbm is 30 Hz. to 30 KHz. +/- 0.5db typ

-Freq. range @ +10 dbm is 30 Hz. to 30 KHz. +/- 1.0db typ



-Freq. range @ +27 dbm is 30 Hz. to 30 KHz. +/- 1.0db typ

-Freq. measurements with no D.C. saturation.



ELECTRICAL SPECIFICATIONS



Characteristic	Typical
Input Impedance	150/600 Ω
Output Impedance	150/600 Ω
Output Power	0 dbm
DCR	
Primary 1-4	13.30 Ω
Secondary 5-8	15.30 Ω
Inductance	@ 1.0 kHz, 1.0 V OC
Primary	0.824 H
Secondary	0.824 H
Leakage Inductance	0.509 mH
Impedance	@ 1.0 kHz, 1.0 V OC
Primary	8.951 K Ω
Secondary	9.127 K Ω
Frequency Response	± 1.0 db from 30Hz to 30KHz
Turns ratio	1:1
Dielectric Strength	500 Vrms
Temperature Range	-40 To 105°C**

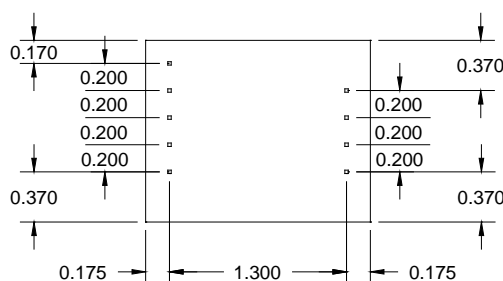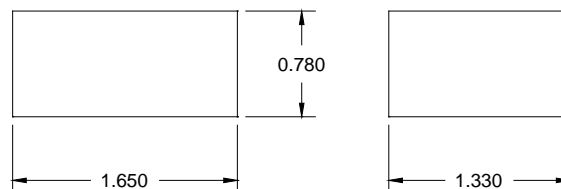


SCHEMATIC DIAGRAM

PRIMARY SECONDARY


PCB LAYOUT

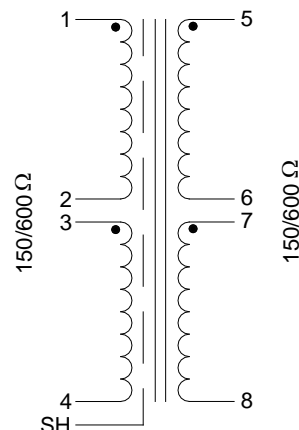


560G Rs=600 RI=600 Frequency Response
Winding Series Connected

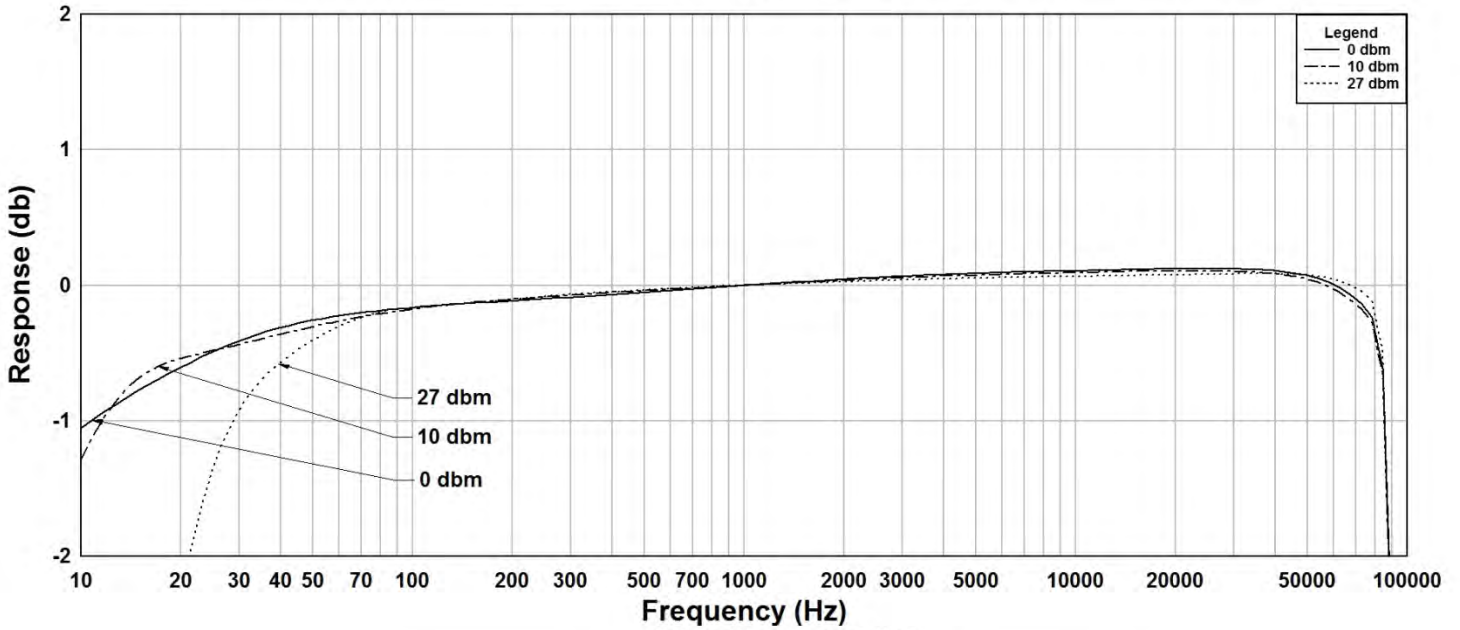

560G Rs=600 RI=600 Phase Shift
Winding Series Connected

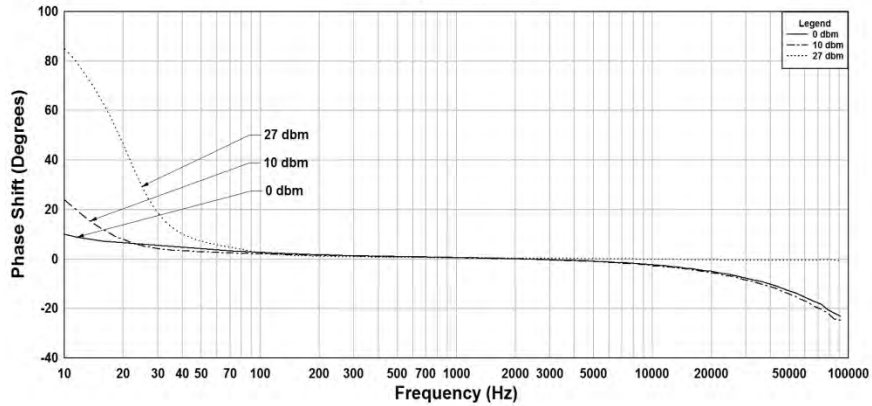


560G Rs=600 RI=600 THD+N
Winding Series Connected

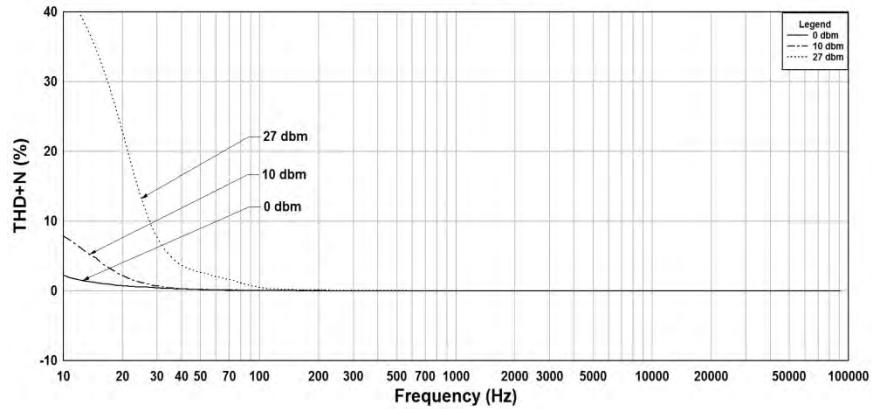


**The epoxy that is used to cast these parts has a workable temperature range of -40°C to +105°C Under a normal rate of change, this does not include thermal shock. Variations in the transformer materials and environmental conditions may reduce the workable temperature range.

This drawing and the information in it is the property of Hammond Manufacturing. It may not be reproduced, transmitted or used in any manner whatsoever without the written permission of Hammond Manufacturing. Data subject to change without notice.


560G Rs=150 RI=150 Frequency Response Winding Parallel Connected

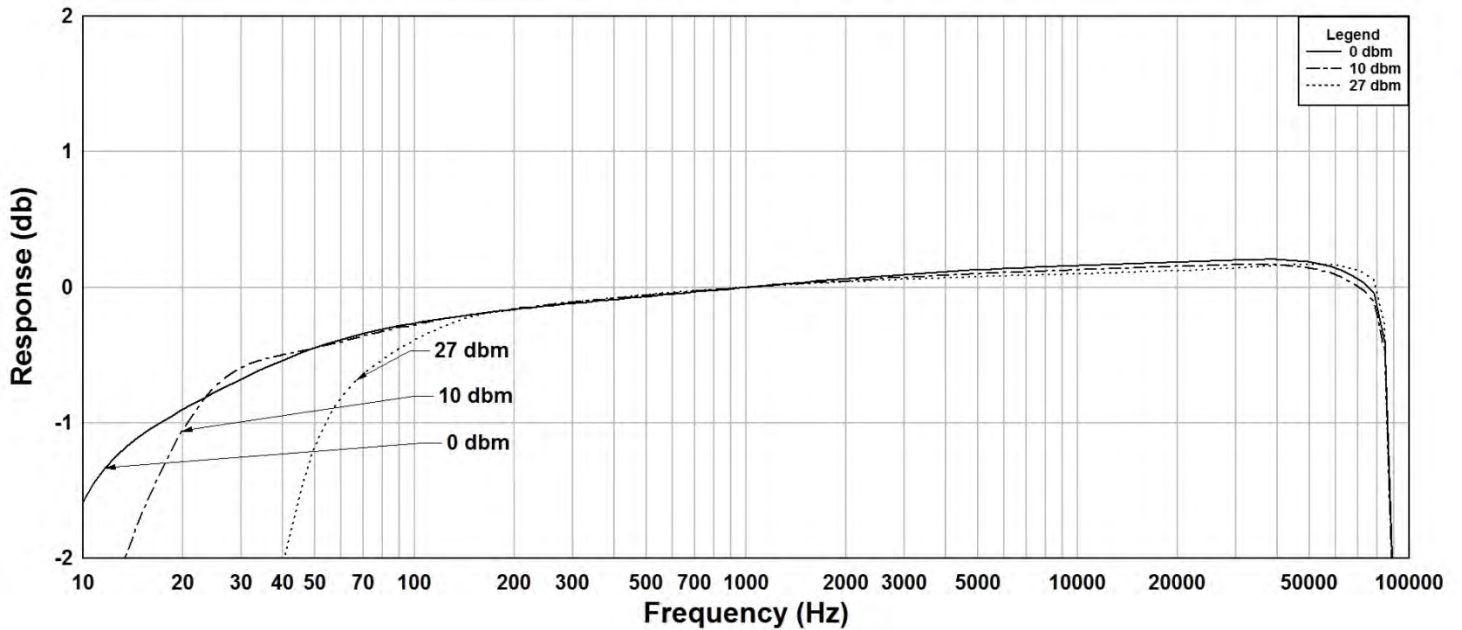

560G Rs=150 RI=150 Phase Shift Winding Parallel Connected

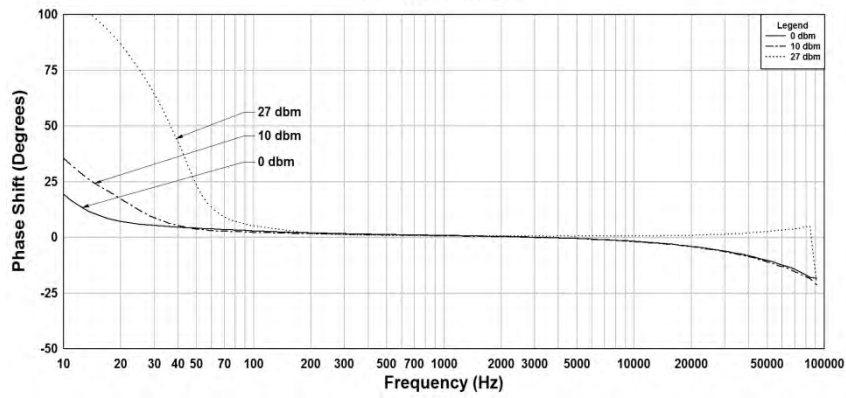

560G Rs=150 RI=150 THD+N Winding Parallel Connected

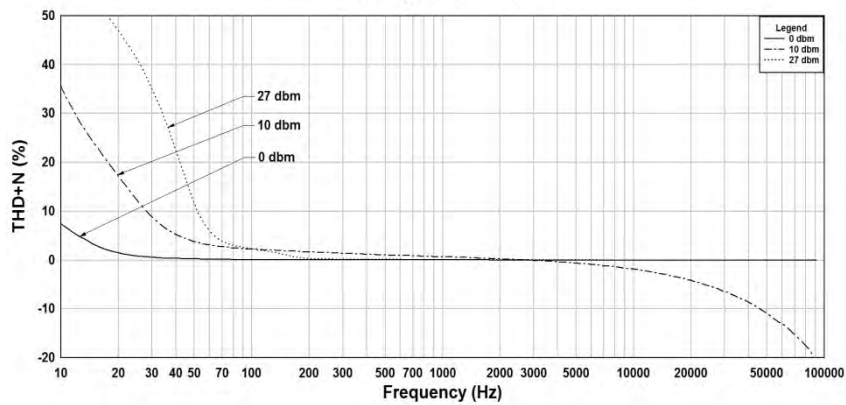

TYPICAL TEST CIRCUIT

Measurement instruments
Hp4192a impedance analyzer
Hp3456a DVM
Keithley 2002 DVM
D scope series iii audio analyzer

