




Quality Products. Service Excellence.

General Replacement Tube Output (8 Watt) Push-Pull 125J Series


Audio

Features

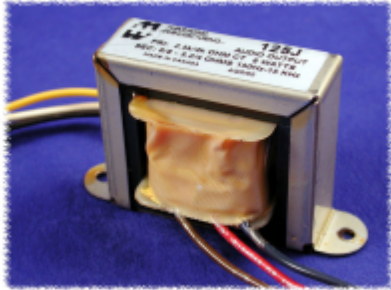

- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 10" long primary & secondary leads.
- Also see our **125H Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**

Part No.	Primary		Secondary		Weight (lbs.)	Overall Dimensions				Mounting Hole G
	Audio Watts	Impedance (Ohms)	Impedance (Ohms)	Primary Inductance		A	B	C	D	
125J	8	2.5K or 4K	6/8 or 3.2/4	5.60 H	1	3.25	1.50	1.94	2.81	0.19

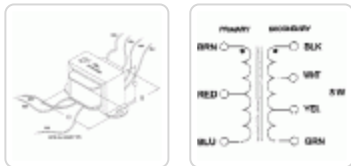

Hook Up Data

PRIMARY IMPEDANCE		SECONDARY IMPEDANCE	USE SECONDARY LEAD CONNECTIONS
Plate to Plate Brown to Blue	(Ohms)		
4,000 C.T.	41857	WHT - GRN	
4,000 C.T.	3.2 / 4	WHT - YEL	
2,500 C.T.	41857	BLK - GRN	
2,500 C.T.	3.2 / 4	BLK - YEL	

Data subject to change without notice

© 2020. Hammond Manufacturing Ltd. All rights reserved.