



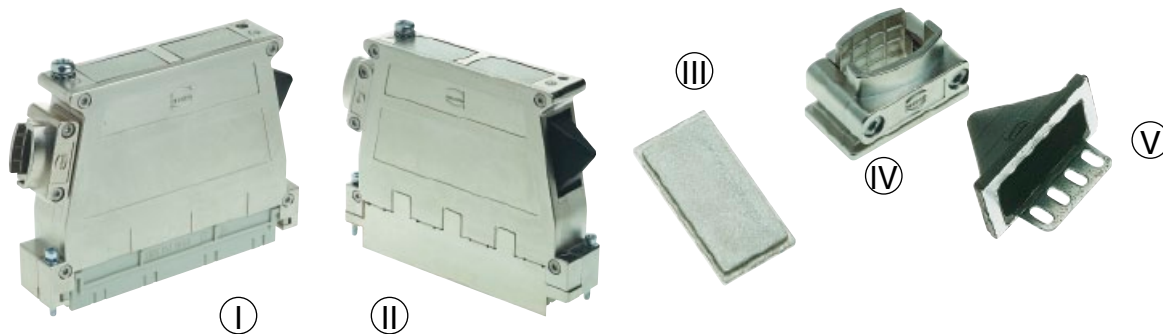

Identification	Part No.	Drawing	Dimensions in mm
Shell housing D 20 metal I Supplied with: Shell with coding 1x Cover 1x Locking screw (hexagonal) M2.5 x 22 (09 06 800 9953) 2x Screw (torx) M2.5 x 10 (09 06 800 9960) 4x Earth screw M4 x 8 (09 06 800 9958) 2x	09 06 848 0550		
Shell housing D 20 metal HF with nickel-plated surface II Supplied with: Shell with coding and HF-sealing spring 1x Cover with shielding plate 1x Locking screw (hexagonal) M2.5 x 22 (09 06 800 9953) 2x Screw (torx) M2.5 x 10 (09 06 800 9960) 4x Earth screw M4 x 8 (09 06 800 9958) 2x	09 06 848 0551		
Blinding piece III	09 06 800 9951		
Cable clamp IV	09 06 800 9955		
Cable grommet with strain relief V	09 06 800 9950		

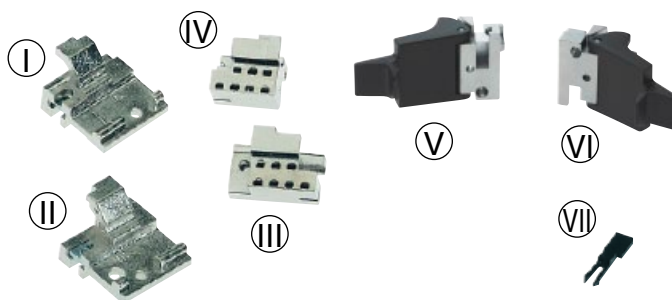

Identification	Part No.	Drawing	Dimensions in mm
Fixing brackets B metallised for male connectors for 19" racks according to DIN EN 60 297, part 3-101 Single fixing (I) with nut M 2.5 DIN EN ISO 4 036 (II)	left 20 mm 09 06 901 9924 ^{f)} right 20 mm 09 06 901 9925 ^{f)}		
Multiple fixing with coding at fixing bracket with nut M 2.5 DIN 562 (III) (IV)	left 20 mm 09 06 900 9997 ^{f)} right 15 mm 09 06 900 9996 ^{f)}		
Fixing brackets B metal for male connectors for 19" racks according to DIN EN 60 297, part 3-101 (V) Single fixing with ejector handle (VI)	left 09 06 800 9946 right 09 06 800 9948		
Crimp flange insert 09 06 800 9952 Cable clamp cable-Ø appr. 5- 7 mm 61 03 000 0141 cable-Ø appr. 7-10 mm 61 03 000 0044 cable-Ø appr. 10-12 mm 61 03 000 0143 Blanking piece for hoods 61 03 000 0042 Code pin (VII) 09 06 001 9905 Earth screw M4 x 8 09 06 800 9958			

^{f)} Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2