



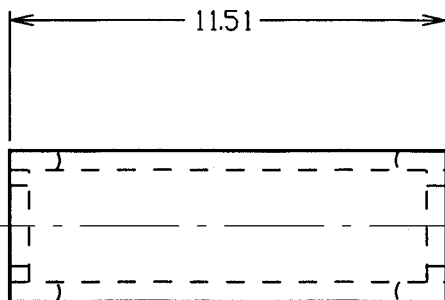

CUSTOMER INFORMATION SHEET

HARWIN PART No.	INSULATOR COLOUR	CONTACT FINISH
M1352-94	WHITE	GOLD
M1352-98	BLACK	GOLD
M1352-99	RED	GOLD
M1353-94	WHITE	TIN
M1353-98	BLACK	TIN
M1353-99	RED	TIN

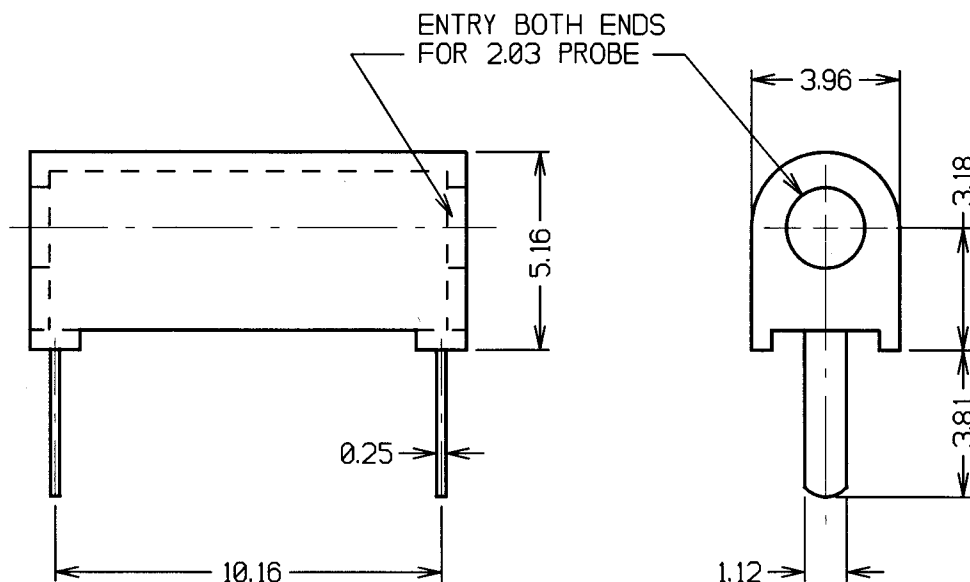

MATERIALS:

INSULATOR = NYLON

CONTACT = BERYLLIUM COPPER

SPECIFICATIONS:

CURRENT RATING = 5 AMPS

OPERATING VOLTAGE = 1500 VRMS

CONTACT RESISTANCE = 5 MILLIOHMS MAX

INSERTION FORCE = 2.2N MIN

WITHDRAWAL FORCE = 16.7N MAX

3 11.07.96 3408

ISS. DATE C/N

APPROVED: *WJB*CHECKED: *WJB*

DRAWN: A. LIOTTA

CUSTOMER REF.

ASSEMBLY DRG:

HARWIN

HARWIN INC U.S.A.	HARWIN PLC U.K.	HARWIN PTE SINGAPORE	HARWIN CONNECTORS KOREA
TEL: (812) 285 0055	TEL: 01705 370451	TEL: 65 7794909	TEL: 822 521 0747
FAX: (812) 285 0056	FAX: 01705 324010	FAX: 65 7793868	FAX: 822 521 0749

TOLERANCES
 X. = ± 1 mm
 X.X = ± 0.25 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm
 ANGLES = $\pm 1^\circ$
 UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

P.C. MOUNTED TEST JACK

DRAWING NUMBER:

M135X-XX

SHT
2
OF
2